

Installation and User's Guide

# Linear Shaft Motor

---

The Next Generation Ultra-Precision Brushless Linear Motor

Simple - High-Precision - Non-Contact

**NPM** Nippon Pulse  
*Your Partner in Motion Control*

Sold & Serviced By:  
 **ELECTROMATE**  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

**DISCLAIMER**

Nippon Pulse makes no guarantees of any kind with regard to this manual and shall not be liable for errors contained herein or for consequential or incidental damages incurred because of acting on information contained in the manual.

**CUSTOMER CARE**

For inquiries relating to the operation and use of the Linear Shaft Motor described in this manual, please contact your local Nippon Pulse representative.

4 Corporate Dr.  
 Radford, VA 24141-5100 USA  
 Phone: 1-540-633-1677  
 E-mail: info@nipponpulse.com  
 Web: http://www.nipponpulse.com

**Important**

This instruction manual is not intended to include a comprehensive list of every detail for all procedures required for installation, operation, and maintenance of the Linear Shaft Motor. This manual describes general guidelines that apply to most of the linear motor products shipped by Nippon Pulse. If you have any questions about a procedure or are uncertain about any detail, do not proceed with installation and contact your local Nippon Pulse representative for more information or clarification.

**Warranty**

Nippon Pulse guarantees its products are free from faulty components and defects in material or workmanship for one (1) year from the date of delivery. Nippon Pulse shall not be liable for any special, incidental, indirect, or consequential damages. Additional information regarding Nippon Pulse’s warranties can be found in our Terms and Conditions of Sale, which are available upon request. All requests for repair and replacement should be directed to Nippon Pulse Inside Sales Department. The serial number of the equipment should be quoted in any communications. Nippon Pulse reserves the right to alter specifications and pricing at any time.

©2016 Nippon Pulse. All rights reserved

**Change Record**

Date	REV	Page	Item	From	To
December 2007	A	All	All	Original	
June 2008	B	3	Table of Contents		Reformatted
		All	PDF Indexed		
		14	Figure 15		Updated
		15, 20	Table 1, Table 3		Added L250, L320
		17	Layout		
		31	Figure 17, 18		Added Hall diagrams
		44-70	Data Sheets		Added L250, L320
		75	Part Numbers		Added Large Air Gap Series
October 2008	C	47	S080 Data Sheet		Hall Effect Lead wire info.
		76-79	Engineering Notes		Updated
April 2009	D	44-70	Data Sheets		Removed S100, Added S605
		80	Appendix C		Updated
April 2012	E	1-3	General Info		Updated
		75	Appendices A, B, C		Updated
			Data Sheets		Updated
April 2012	F		Document Reformatted	Word Doc	Adobe InDesign
May 2015	G	31-80	Data Sheets		Updated
July 2015	H	29-30	FAQ		Updated
August 2015	I	84	Usable Stroke Drawing		Updated
March 2016	J	31-91	Data Sheets		Updated L Series

Sold & Serviced By:



# Table of Contents

<b>GENERAL INFORMATION</b> .....	4-5
Warnings .....	4
Receiving .....	5
Storage .....	5
Unpacking .....	5
Handling .....	5
Repairs .....	5
<b>OVERVIEW</b> .....	6-7
What is a Linear Shaft Motor? .....	6
Advantages of Linear Shaft Motors .....	6-7
<b>DESIGN CONSIDERATIONS</b> .....	8-15
The Linear Shaft Motor System .....	8
Linear Shaft Motor .....	9
Servo Driver .....	10
Linear Encoder .....	10-11
Bearing System .....	12
Shaft Support .....	13
End Sensors .....	14
Home Sensor .....	14
Cable Carrier .....	14
Other System Components .....	14
Environmental Considerations .....	15
Vertical Applications .....	15
Clean Room .....	15
Multi-Axis Systems .....	15
<b>INSTALLATION</b> .....	16-24
Mechanical Basic .....	16-17
Mechanical Advanced .....	17-21
Electrical Installation .....	22-23
Servo Driver .....	24
<b>MAINTENANCE AND SERVICE</b> .....	25
<b>TROUBLESHOOTING GUIDE</b> .....	26-28
<b>FREQUENTLY ASKED QUESTIONS</b> .....	29-30
<b>TECHNICAL DATA SHEETS</b> .....	31-91
<b>GLOSSARY</b> .....	92-94
<b>APPENDIX A (PART NUMBER AND ORDERING INFORMATION)</b> .....	95
<b>APPENDIX B (ENGINEERING NOTES)</b> .....	96-99
<b>APPENDIX C (SERVOMOTOR DRIVERS)</b> .....	100
<b>APPENDIX D (CE DECLARATION)</b> .....	101
<b>APPENDIX E (READER'S COMMENTS)</b> .....	102
<b>ABOUT NIPPON PULSE</b> .....	103

# General Information

This instruction manual contains general procedures that apply to Nippon Pulse Linear Shaft Motor products. Be sure to read and understand the Safety Notice statements in this manual. For your protection, do not install, operate, or attempt to perform maintenance procedures until you understand the Warning and Caution statements.

A 'Warning' statement indicates a condition that can cause harm to personnel. A 'Caution' statement indicates a condition that can cause damage to equipment.

## Warnings



**Heart Pacemakers.** Linear Shaft Motors contain powerful permanent magnets. Anyone with a pacemaker or A.I.C.D. should maintain a minimum distance of 12 inches from the magnets.



**Strong magnets.** The magnetic attraction between the magnet shaft and other magnetic or ferrous materials is extremely high. Keep fingers and other body parts away from these objects to avoid injury by this magnetic attraction.



**Electric shock.** Do not touch electrical connections until you ensure that **power has been disconnected**. Electrical shock can cause serious or fatal injury.



**Hot surface.** Surface temperatures of up to 80°C (144°F) can be present during the commissioning and servicing of this equipment. Allow the forcer and shaft to cool before working on the equipment.



**Heavy object.** Use proper care and safety procedures during handling, lifting, installing, operating, and maintaining operations. Improper methods may cause muscle strain or other harm.



**Crush hazard.** The forcer may move unexpectedly. Always isolate all sources of electrical supply before working on the equipment.



**General hazard.** Follow the advice given.



**Ground hazard.** Be sure the system is properly grounded before applying power. **DO NOT** apply AC power before you ensure that all grounding instructions have been followed. Electrical shock can cause serious or fatal injury. National Electrical Code and local codes must be carefully followed.

## CAUTION:

Be careful when removing the motor from its shipping container. Slide the motor from the box onto a level, non-magnetic, flat surface to prevent bending. Bending can damage the forcer and shaft.

## Receiving

Each Linear Shaft Motor is thoroughly tested at the factory and carefully packaged for shipment. When you receive your motor, there are several things you should do immediately.

1. Observe the condition of the shipping container and report any damage immediately to the commercial carrier that delivered your motor.
2. Verify that the part number of the motor you received is the same as the part number listed on your purchase order.

## Storage

If the parts are not immediately put into service, store them in a clean, dry, and warm location. If the storage location is damp or humid, the exposed metal surface of the motors and windings must be protected from moisture. If the ambient temperature decreases suddenly, condensation may form. Protect all parts from moisture.

## Unpacking



Each Linear Shaft Motor is packaged for ease of handling and to prevent entry of contaminants. To avoid condensation, do not unpack until the motor has reached room temperature of the room in which it will be installed. The packing provides insulation from temperature changes during transportation. When the motor has reached room temperature, remove all protective wrapping material from the motor. It is recommended that the protective wrapping material be left on the shaft during installation. Unpack the magnet shaft and place it on a clean non-magnetic surface away from other magnet devices and any other ferrous material.

Always keep the magnet shaft at a safe distance from magnetic or ferrous material, a distance equal to the N-N magnetic pole pitch. If the magnet shaft is to be left unattended for any period of time, precautions should be taken to prevent accidents due to the strength of the magnets (it is best to leave them in their packing material to prevent injury due to magnetic attraction). Anyone who will come in contact with this assembly while receiving, transporting, storing, installing, disassembling, or at any other time, must be made aware of this danger.

## Handling

**Be extremely careful. Keep in mind:**



The magnetic attraction between the magnet shaft and other magnetic or ferrous materials is extremely high. Keep fingers and other body parts away from these objects to avoid injury.



Use proper care and procedures that are safe during handling, lifting, installing, operating, and maintaining operations. Improper methods may cause muscle strain or other harm.

## Repairs

Nippon Pulse will not share any responsibility for damage caused by customer attempt to repair or modify a motor. Any repairs or modifications attempted by the customer without first consulting Nippon Pulse will void any warranties, both implied and stated. Consult Nippon Pulse before performing any service or modification to the motor(s).

# Overview

## What is a Linear Shaft Motor?

The Linear Shaft Motor is a high-precision direct drive linear servomotor consisting of a shaft of Neodymium-Iron-Boron Permanent (NIB) Magnets and a "forcer" of cylindrically wound coils.

### Shaft Construction

- The magnetic portion of the Shaft is built in such a manner that there is no space between each magnet and is fully supported within itself.
- The magnetic portion is inserted into a protective stainless steel tube. This is shown in **Figure 1**. This is a patented process which is protected by numerous patents throughout the world.
- The patented process used by the Linear Shaft Motor produces a very strong magnetic field, by kinking and redirecting, which is twice that of other linear motors. An actual measured magnetic field is shown in **Figure 2**.
- The magnetic portion is then inserted into a protective stainless steel tube. This is shown in **Figure 1**.

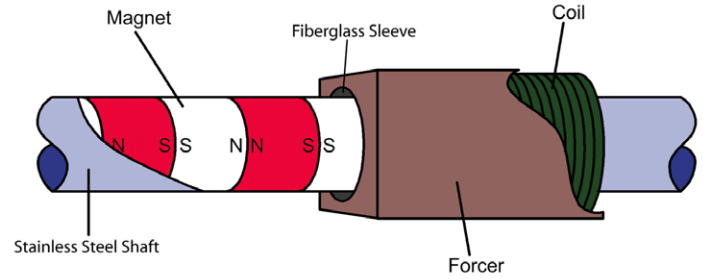


Figure 1

### Forcer Construction




Figure 3

The coils of the Linear Shaft Motor are of a cylindrical design, thus providing a number of key advantages over other linear motors.

- The cylindrical design of the coils makes the coil assembly very stiff without the use of external stiffening materials, such as the iron used by platen style linear motors.
- The coils surround the magnets allowing for the optimal use of all the magnetic flux. (**Figure 3**)
- The above point makes the air gap non-critical. As long as the forcer does not come in contact with the shaft there is no variation in the linear force.
- The magnetic flux cuts motor windings at right angles for maximum efficiency.
- All sides of the coil are positioned to allow for maximum dissipation of heat.

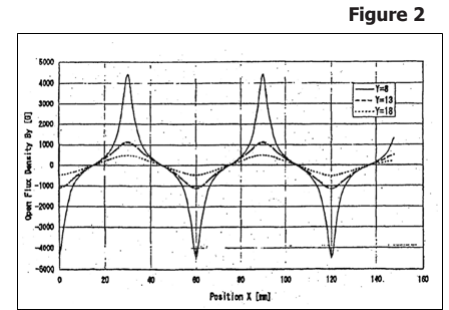




Figure 2

The Linear Shaft Motor requires less current and less mass to produce forces similar to traditional linear motors of comparable size. This combination makes the Linear Shaft Motor more efficient than these comparable motors.

## Advantages of Linear Shaft Motors


- **Very simple construction.** The Linear Shaft Motor itself consists of only two parts: the shaft (with magnets) and the forcer (coils). There is a non-critical air gap, and no physical contact between the shaft and the forcer.
- **Direct drive.** Unlike lead screws with gearheads, the Linear Shaft Motor offers high thrust (up to 20,000 Newtons/4500 pounds) without any gearheads or backlash.
- **Precision linear position control.** Linear movement resolution as small as 0.07 nanometers is achievable.
- **Precise speed control.** High speeds (up to 6.5 meters per second) and low speeds (down to 8 micrometers per second) are achievable with virtually no speed fluctuations (+/-0.006% at 100 micrometers/second).
- **Durable construction.** Capable of operating in a clean room environment, in a vacuum, or under water.
- **Quiet Operation.** The absence of friction makes the system extremely quiet. The only mechanical contact section is the linear guide.
- **Compact and lightweight.** Lightweight when compared to traditional linear motors.
- **Zero cogging.** The coreless design results in no magnetic cogging whatsoever.
- **Large Air Gap.** The non-critical 0.5mm to 5.0mm nominal annular air gap allows for easy installation and alignment.
- **Simple drive.** The Linear Shaft Motors have built-in flexibility to cater to most servo amplifiers. They can be driven by traditional three-phase brushless DC servo drives. Several units can be networked to achieve a cluster of Linear Shaft Motors that can be synchronized with a network controller or a PC.
- **Power Efficiency.** The Linear Shaft Motors extremely strong magnetic flux, cylindrical design and small moving mass provide for a very efficient linear motion. The Linear Shaft Motor is 50% more efficient than non-direct drive systems (Belt drive, ball/lead screw, etc.) and also 50% more efficient than other direct drive systems (u-shaped linear motor, etc.).

- **Enclosed magnets.** Because the magnets in the Linear Shaft Motor are enclosed by a stainless steel shaft, the motor can easily be integrated into various environmental conditions.
- **Efficient Use of Magnetic Flux.** With the motor coils encircling the magnets, the Linear Shaft Motor uses 100 percent of all magnetic flux. All magnetic flux created cuts the motor coils at 90 degrees.
- **Parallel Drive.** The design of the Linear Shaft Motor allows it to be used in a parallel configuration using only one encoder, one drive, and one amplifier.
- **Wide capability.** Thrust forces less than 0.5 Newtons and peak thrust forces up to 20,000 Newtons are available. Usable strokes from 20 mm up to 4.6 meters can be chosen from a number of available models.

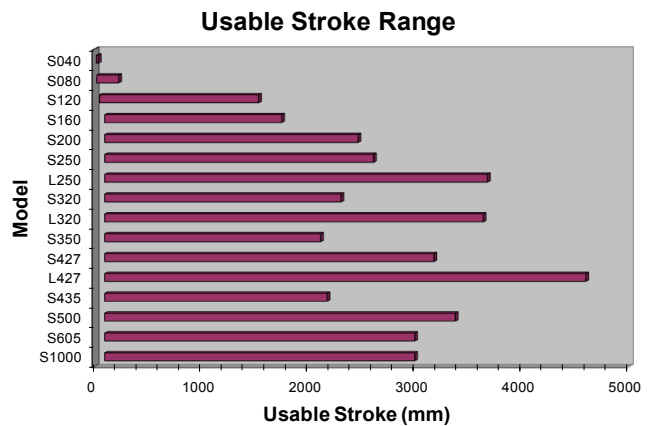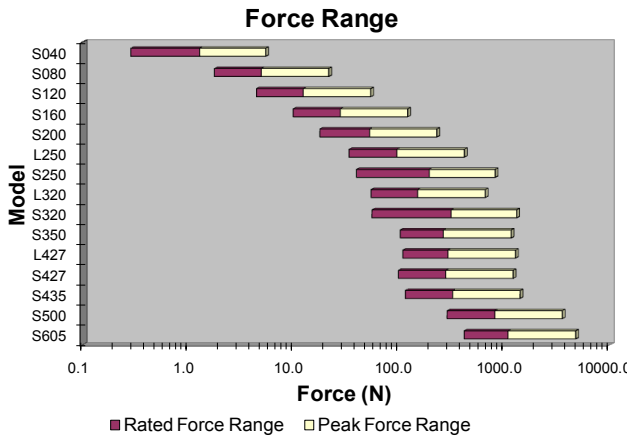

### Shaft Motor Application Resource Tool (SMART)

Nippon Pulse offers the Linear Shaft Motor Application Resource Tool to assist in determining the proper motor for all applications. Easy to use, SMART requires the user to plug in some basic information about the project (payload mass, effective stroke required, force required, etc.). Once project specifications are entered, the program helps determine which motor is best suited for the application.

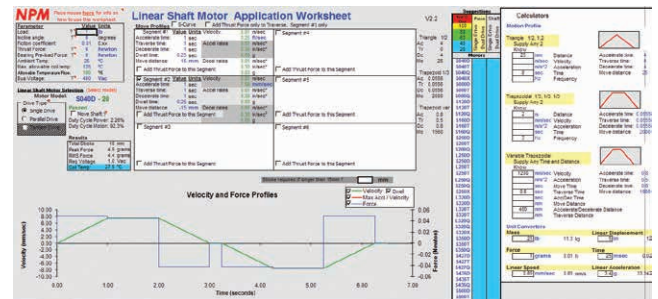

### Online 3D CAD Models

For the early application design phase, Nippon Pulse offers 3D CAD drawings on our web site. After a quick and completely private registration, users are able to download CAD drawings in virtually every CAD format available.

# Design Considerations

The design of the Linear Shaft Motor allows for systems replacing standard ball-screw to achieve higher speed and resolution. However, to achieve the highest performance with the Linear Shaft Motor system, the entire system structure must be optimized. There are various design considerations, which are somewhat different from traditional servo system practices. We will discuss the main components needed to make a Linear Shaft Motor system as well as what factors to consider when making your selections.



To configure a system using the Linear Shaft Motor, the following peripheral devices are required:

- A. Linear Shaft Motor - There are 16 model sizes available. The correct model needs to be chosen for the application, depending on several factors including the stroke length and thrust force required.
- B. Servo Driver - This is a standard three phase brushless DC (sometimes referred to as AC servo) driver.
- C. Linear Scale - This is placed along the linear guide, or rail, and provides precise linear position feedback to the servo system.
- D. Bearing - These are used to guide the forcer as it moves linearly. This is the only contacting part. For totally no-contact applications, air bearings can be used.
- E. Shaft Support - In applications where the shaft is stationary while the forcer moves and is attached to the load, two shaft supports (one at each end) are required.

Items B-E are necessary parts of the system and great consideration must be given to your application, demand specifications, environmental conditions, and which part will be moving — the forcer or the shaft. The other items, F through I, are optional and will need to be selected depending on your application. Other considerations include:

**Motion Controller** - This can be a PC or a dedicated programmable single (or multiple axis) motion controller. This is sometimes integrated into the Servo Driver.

**Cable Carrier** - Cable tracks will help guide and prevent damage to the motor cable, encoder cable, and any ancillary cables or hoses attached to the forcer.

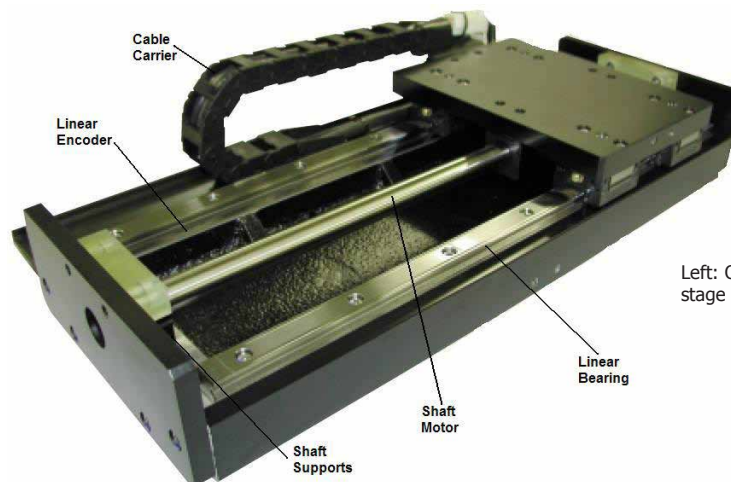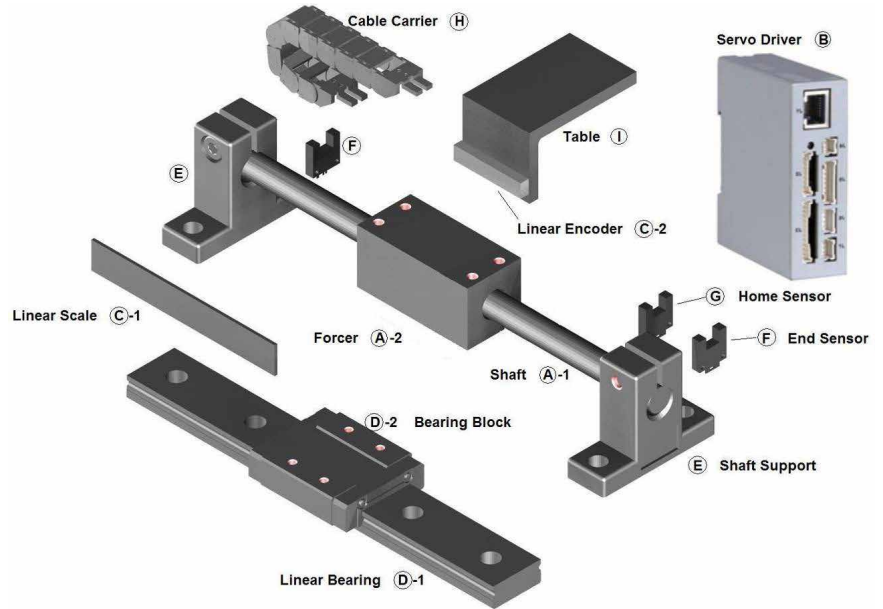

Left: One version of a completed motion stage (not including electronics).



## Linear Shaft Motor

With the Linear Shaft Motor there are two ways to achieve linear motion. The shaft can be held stationary while the forcer moves or the forcer can be held stationary while the shaft moves. There is no restriction on the angle or orientation at which the system can be mounted. This provides the user with a high degree of flexibility.

The Linear Shaft Motor should be mounted as closely as possible to the center of mass of the moving load and should be as close as possible to the working point of the machine. If this is not possible, than two Linear Shaft Motors can be used and should be spaced evenly from the working point.

In the majority of applications, the shaft will be fixed and the forcer will be the moving element. In this case, the forcer has been designed for the payload to be mounted via the supplied mounting holes. It is recommended that you use an adapter plate if the holes must be customized for mounting bearings, the encoder system and other specific application needs. The forcer comes with standard surface mounting holes that can be used to attach it to the load. Refer to the Data Sheet of your Linear Shaft Motor for detailed mounting dimension information.

If the application requires a moving shaft, then the surface to which the stationary forcer is mounted should have a minimum flatness of 0.01mm, and parallelism of 0.03mm.

## Shaft



**The magnetic field emanating from the shaft is very strong; always use extreme caution when handling.**

Since the shaft contains strong magnets, its proximity to ferrous parts, or parts sensitive to magnetic fields, should be carefully considered.

A list of items to keep at a safe distance from the magnetic shaft include, but are not limited to: tools, watches, cell phones, pacemakers, precision instruments, and computers.

The shaft must be mounted so that it maintains concentricity with the central bore of the forcer. When the forcer and shaft are aligned correctly there is a nominal radial air gap of between 0.5 to 5.0mm depending on the series of Linear Shaft Motor you are using (refer to the Data Sheet to determine the exact gap size on your Linear Shaft Motor); where practical, this should be maintained along the entire length of travel. This air gap is non-critical, but the forcer should not rub against the shaft. If this occurs the amount of friction in the system is increased.



**NOTE: The shaft is not a load-bearing member. Do not use it as a bearing surface.**

There are no mounting holes provided in the shaft, nor is it advisable for the customer to drill any. Therefore, the shaft must be clamped in position. As the forcer encircles the shaft and travels along its length, the shaft can only be clamp at its ends. Because all generated force is transmitted throughout the length of the shaft, users must ensure the chosen clamping method can withstand the peak force created by the Linear Shaft Motor. In order to propel the forcer only, the shaft must be prevented from moving. For applications where the shaft is to move, the forcer must be prevented from moving.

The shaft contains magnetic components whose performance can be impaired if subjected to temperatures above 80°C. With temperatures above 80°C, demagnetization of the magnets within the shaft can occur. Therefore, avoid mounting the shaft close to any direct heat source. Consideration should also be given to the continuous operating current at the applicable ambient temperature. For applications where the duty cycle is high, ensure there is good flow of air over the forcer and shaft, especially through the air gap.


To operators unfamiliar with cylindrical linear motors, the shaft appears as a solid metal bar and is often used as a handle. This may cause damage to the system, and should be avoided. Furthermore, operators are often caught unaware by the magnetic nature of these parts. Use warning labels to clearly identify the potential hazard, and when possible use a suitable physical guard or cover.

The north end of the shaft is marked with a yellow dot. It is essential, when designing systems with parallel Linear Shaft Motors driven with one servo driver, that the north ends of both shafts are in the same direction.

## Forcer

For applications where the duty cycle is high, ensure there is sufficient air flow over the forcer and shaft, especially through the air gap.

The end of the Linear Shaft Motor forcer with the lead wire coming out should be toward the North end of the shaft marked with a yellow dot (**Figure 4**). This is most critical when designing systems with tandem and parallel Linear Shaft Motors driven with one servo driver. The linear encoder should also be installed to count up in this direction of travel. If it does not, the A and B encoder signals should be exchanged.

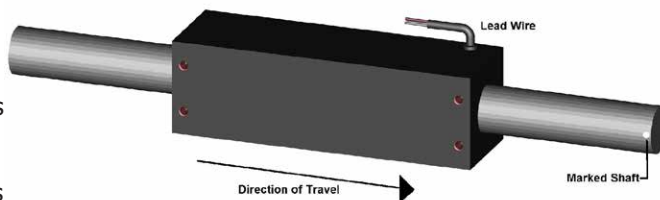

Note the forcer is electrically earth grounded through the forcer case. For CE type forcers the earth ground is also available through the motor cable.

## Servo Driver

Any three phase brushless DC servomotor driver can be used to drive the Linear Shaft Motor<sup>1</sup>. In order to control the position of the Linear Shaft Motor, it is necessary to employ a servo controller and amplifier combination. There are many different makes and models of amplifiers available, but they tend to fall into one of three possible categories:

1. Intelligent amplifiers that have built in servo controllers
2. Velocity amplifiers capable of controlling only the velocity of the motor
3. Current/Torque amplifiers that control only the force of a linear motor (torque in a rotary motor)

## Commutation

Different servo amplifiers have different commutation arrangements. The Linear Shaft Motors have built-in flexibility to cater to most servo amplifiers. The two most common methods of commutation are trapezoidal and sinusoidal. Commutation is usually started in one of three ways.

1. Digital Hall effects are used where trapezoidal commutation is required, or where sinusoidal commutation is achieved through encoder feedback and the Hall effects are used to read, on power-up, the location of the forcer in relation to the magnetic fields of the shaft.

If the servo amplifier you are using does not look at the Hall signals on power up it most likely only uses sinusoidal commutation, it starts commutation in one of two ways.


2. The driver will apply power to move the servo motor a few counts before initiating commutation, sometimes called a 'wake and shake'.
3. The other method will cause your motor to jump when power is applied to the system as the commutation sequence is typically initiated by energizing one of the motor phases. **WARNING - There can be large movements when power is applied to the system.**

## Encoder

When sinusoidal encoder commutation is used, the electrical cycle of the motor is a required setting within the amplifier. The electrical cycle is normally defined in terms of encoder counts per pole pair (the distance between consecutive like poles).

## Hall effect

Hall effect sensors are devices that can sense position magnetically and provide this information to the driver. Hall sensors are quite small and can be, depending on the size of Linear Shaft Motor, mounted outside or inside the forcer to sense the magnetic field of the shaft assembly. The sensors are operated only as switches, that are "ON" or "OFF" to sense the changing field direction as alternate north-south poles pass by when the forcer moves in respect to the shaft. The Hall sensors are mounted 120 electrical degrees apart. Each 60° segment has a unique set of Hall sensor outputs so that the forcer position can be resolved to any six segments over the 360 electrical degrees (**Figure 5**). The Hall effect sensors used in the Linear Shaft Motors employ an open collector output. The Linear Shaft Motor does not come with Hall Effect sensors in its standard configuration; they will need to be selected as an option if required by your selected driver.

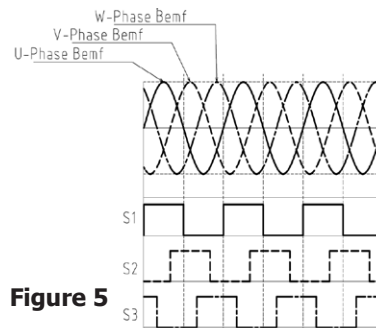

## Linear Encoder

One of the advantages of the Linear Shaft Motor is that there is no inherent backlash in the motor. Therefore, it is possible to produce systems that can be moved to the same position from either direction without errors due to mechanical backlash. It is always desirable to use encoder systems that do not suffer from backlash (i.e. the

1. For a list of Servo Drivers which have been tested to work with the Linear Shaft Motor see Appendix C.

use of rotary encoders with conversion systems is not advisable). Basically, any type of system that can produce a measurable signal based upon distance moved can be used. The actual choice depends on a number of variables, such as repeatability required, operating environment, and signal type. The most commonly used linear encoders available consist of an encoded strip (attached to a surface parallel to the motor), and a sensor read head mounted to the moving part (motor). These are normally either optical, magnetic, or inductance based systems. For very high accuracy systems it is also possible to use a laser interferometer.

### Resolution

The positioning resolution, repeatability, and smoothness of operation depend on the resolution of the encoder. The application usually determines the required resolution. In addition, the maximum response speed of the encoder may limit the maximum system speed. It is also imperative that you insure the controller is capable of counting the frequency of encoder pulses produced at your application's maximum speed. It is always important to ensure that the encoder type selected is compatible with the controller that you are intending to use. When sinusoidal encoder commutation is used, the electrical cycle of the motor is divided by the encoder resolution within the amplifier. For this reason, the smoothness of operation depends on the resolution of the encoder, it is recommended you use an encoder with a resolution that is at least equal to or finer than the north to south magnetic distance divided by 1000. See **Table 1**.

### Mounting Location

The linear encoder should be mounted as close as possible to the working point of the machine. If the motor and feedback are far apart, the machine structure and bearings must be of sufficient stiffness to minimize dynamic deflections of the structure.

### Error Signal

It is recommended that a magnetic or optical encoder, which has an Error Signal, be used when using a servo drive utilizing Hall commutation. Using the encoder's error signal will allow the servo controller to detect when the system is missing pulses (drifting) or when the encoder signal is lost. Many servo drives using Hall commutation may try to apply full power to the motor when the encoder signal is lost, which will cause a highly undesirable system condition. To prevent this, the servo drive should be disabled by the servo controller or commanded to stop in a controlled manner when the encoder signal is lost.

In general, encoder errors are normally due to either:

- Incorrect sensor read head alignment with the encoder scale
- Incorrect gap between sensor read head and the encoder scale
- Damaged or dirty encoder scale, particularly optical scales
- Damaged signal wires
- Noise on the encoder signals

### Magnetic Encoder

In the case of a magnetic linear encoder, ensure it is installed so the magnetic shaft does not affect the encoder. Magnetic encoder strips can be affected by the high magnetic fields produced by the shaft. It is possible for the magnetic field of the shaft to interfere with the field of the strip, or affect the read head directly; therefore, it is necessary to ensure there is sufficient distance between the components to ensure this does not occur. It is advisable that the two be separated by a distance equal to or greater than the north-to-north magnetic distance.

Sinusoidal Commutation Course Encoder

Coil	NS	Resolution
S040	9mm	9µm
S080	15mm	15µm
S120	24mm	24µm
S160 L160	30mm	30µm
S200	36mm	36µm
S250 L250	45mm	45µm
L250xS	60mm	60µm
S320 L320 S350	60mm	60µm
S427 L427 S435 S500	90mm	90µm
S605	120mm	120µm
S1000	135mm	135µm

**Table 1**

## Bearing System



**NOTE: The shaft is not a load-bearing component.  
Do not use it as a bearing surface.**

Like a ball-screw carriage, the forcer must be supported by a linear bearing system. The linear bearing system must be capable of supporting the load/heat sink and the forcer. Often, the linear bearing is the only moving contact type component in the system. Therefore, this component requires special attention. If the motor and feedback are far apart, the machine structure and bearings must be of sufficient stiffness to minimize dynamic deflections of the structure. Desirable bearing characteristics include high stiffness (for increased natural frequency) and low friction. Because the Linear Shaft Motor can provide high velocities, the speed and acceleration limitations of the bearings need to be considered. Some common bearing choices are compared in **Table 2**.

Air bearings are most desirable from the standpoint of smoothness, but they are also the most costly. Mechanical slide rails on the other hand are the least expensive, but they are least desirable with respect to load carrying capability.

	Slide Rails	Cam Follower	Crossed Roller	Recirculating Element	Air
Travel	⊙	⊙	●	⊙	⊙
Stiffness	●	●	⊙	⊙	⊙
Speed	●	⊙	⊙	○	⊙
Smoothness	●	⊙	⊙	⊙	○
Precision	●	●	⊙	⊙	○
Load	⊙	●	⊙	⊙	●
Cost	○	○	⊙	⊙	●
Least Desirable ● ○ ⊙ Most Desirable					

**Table 2**

## Shaft Support

The shaft support along with the patented shaft design is what allows longer strokes in a Linear Shaft Motor system without excessive bending of the shaft. The shaft support should be able to support the mass of the shaft and should also be in contact with the shaft for the specified support length.




Figure 6

While the shaft support can be designed into the basic system structure of your machine, a typical shaft hanger such as the one shown in **Figure 6** can also be used. However, a few points to note are as follows:

1. For optimal performance it is recommended that the shaft be supported for the support length listed on the appropriate Linear Shaft Motor data sheet.
2. While a single shaft support will provide better security and easier alignment, a lower cost option is to space two smaller shaft supports for the specified support length. If using two shaft supports at each end of the shaft, confirm that the shaft supports are spaced according to the specified support length as outlined in the data sheet. See **Figure 7**.
3. There should be the capability to adjust the position of the shaft to align it with the central bore of the forcer.
4. Because of the simple support structure of the motor, on longer systems the shaft will have a tendency to sag in the middle due to gravity (**Figure 8**). This can be overcome, to some extent, by inducing an upward bow into the shaft. Two common methods of doing this include; using shims to angle the end clamps



Figure 8

(**Example 1**) or providing screw adjustment to angle the end clamps (**Example 2**). Verify that the shaft does not exceed the maximum bending as shown in the Data Sheet for your Linear Shaft Motor.




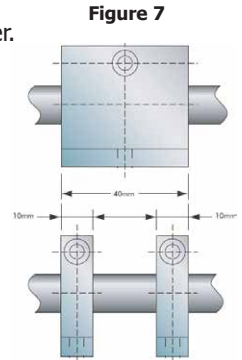


Figure 7

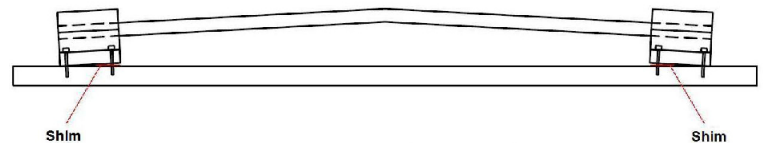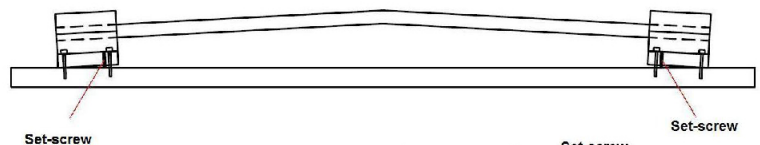


### Example #1

Use shim between the base and the shaft support to cause upward bending.

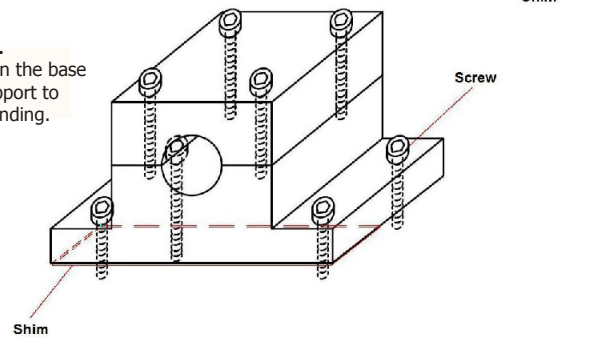

### Example #2

Use a set screw to lift one end of the shaft support to cause upward bending of the shaft.

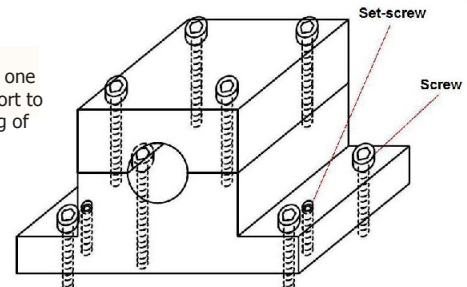

Sold & Serviced By:

**ELECTROMATE**

Toll-Free Phone (877) SERV098  
 Phone Fax (877) SERV099  
 www.electromate.com  
 sales@electromate.com

## End Sensors

End Sensors are also called limit (end of travel) switches and are primarily safety features.

End sensors may be useful when debugging a system or when the system is initializing, during its commissioning, and when unforeseen errors occur during normal operation. A common error (that may result in motor damage) is to leave the motor applying force against an end stop. If the limit signals are used to disable the amplifier, or to allow motion only in the direction away from the end stop, then this type of damage can be avoided. Limit switches are also helpful when the commanded positions are larger than the travel available. They can also be used as part of the homing sequence if required. There is normally one switch at either end of travel. Many quality linear encoders include limit switches.

In the event that the system starts losing counts (if the encoder stops producing them correctly or the controller counts them incorrectly) the physical position of the motor will change for the same count values. The limit switches can be used to ensure that if the motor passes a defined maximum physical position it can be disabled or even stopped, thus minimizing damage potential.

To protect from over-travel, it is highly recommended safety bumpers be installed. Bumpers on each end of the shaft can prevent damage to the system when unforeseen over-travel occurs.

## Home Sensor

If an incremental encoder is used it is not possible for the controller to know the absolute position of the motor when the system is initially powered up. In order to establish a known position, it is necessary to perform a search for a home or index mark; this is often referred to as the homing sequence. For linear encoders with only one index mark it is only necessary to search for the index mark from the encoder. However, many linear encoders have index marks at regular intervals along the length of travel. In this case it is advisable to use a home sensor for the homing sequence.

## Cable Carrier

It is recommended that when the Linear Shaft Motor is used with a moving forcer, a cable carrier be used. The cable carrier will help guide and prevent damage to the motor cable, encoder cable, and any ancillary cables or hoses attached to the forcer.

The forcer provides some strain relief for the cable, but when the forcer is moving it should not be relied upon as the only means of cable strain relief. Cable carriers also provide a means to relieve strain from the motor and encoder cables.

For short stroke systems, it may not be necessary to use a cable carrier. In order to achieve the rated flex-life of the motor and encoder cables, special attention should be given to the cable suppliers' recommended cable bend radius.



**The cable that exits the forcer is not a high-flex type; therefore it must terminate before entering the cable carrier.**

It is strongly suggested that a high-flex cable be mounted with a connector to your Linear Shaft Motor before it enters the cable carrier. This allows maintainability of the high-flex cable without having to removing the forcer. To assist with this, every Linear Shaft Motor is shipped with a connector which you can install. A good shield connection on all cabling is required for proper operation. Cables should be made in a twisted pair configuration, shielded, and grounded properly to the machine base, servo amplifier, and motor in order to reduce RFI.

Note the forcer is electrically earth grounded through the forcer case, for CE type forcers the earth ground is also available through the motor cable.

## Other System Components

Each component in the moving portion of a system will increase mass, thus increasing the amount of energy needed to run it and the amount of heat generated. Systems must have the highest stiffness, with lowest possible mass, to increase resonant frequencies above the required servo bandwidth. All moving parts should also be of the lowest possible mass which will allow higher accelerations and velocities. Hollowed and ribbed components or honeycomb structures, along with special materials, will assist in reducing power requirements and system temperature. Obtaining the highest stiffness with the lowest mass requires that the linear motor be treated as an integral element to a motion system and not an add-on part.

## Environmental Considerations

Temperature considerations are critical when using the Linear Shaft Motor. For this reason ventilation is extremely important. Be sure to allow clearance for ventilation and access for cleaning, repair, service, and inspections. Be sure the area for ventilation is not obstructed. Obstructions limit the free passage of air. Linear Shaft Motors get warm and heat must be dissipated to prevent damage. The coil temperature rise of the ambient of any linear motor is linearly proportional to the amount of force produced. The design of the Linear Shaft Motor allows for the maximum amount of heat dissipation of any linear motor.

A temperature sensor OTL (Over Temperature Limit), which will cut power to the motor should it get too hot due to over load, can be added in series with the main power to the driver. The maximum coil temperature limit is typically 135°C. The standard temperature difference between the coil and the forcer surface is shown in **Table 3**.

## Vertical Applications

If the Linear Shaft Motor is to be operated in a vertical orientation, it is recommended a counter-balance be used. If the load is not counter-balanced, the Linear Shaft Motor must always work against gravity, even when it is not moving. This should be taken into consideration when sizing the Linear Shaft Motor. The counter-balance should be designed to balance the gravitational force acting on the system, which is the weight of the forcer and the payload. If a system is properly counter-balanced, even when no power is applied to the forcer, it should remain stationary. Typical counterbalance techniques include a pneumatic cylinder, springs, or a counterweight.

If a counter-balance mechanism is not possible, a brake should be used to prevent the load from dropping in the event of a power interruption.

## Clean Room

Stages prepared for Class 10, 100 and 10,000 clean rooms can be built using standard Linear Shaft Motors. The customer must consider the bearing and other moving parts selected to confirm they are materials suitable for the specified environment. It is recommended that air bearings be used in stages for clean rooms. Linear Shaft Motors can be provided as clean room prepped if requested. The customer must perform the final cleaning. When using the Linear Shaft Motor in a clean room, Nippon Pulse recommends using a moving-shaft design (forcer stationary) to eliminate cable debris.

## Single Drive System

This is a basic drive system. The X and Y shafts can be used to create an X-Y stage.

## Multi-Axis Systems

The unique functionality of the Linear Shaft Motor allows for various multi-axis configurations. These range from a single axis with two or more motors on the same shaft and bearing system, to X-Y-Z gantry systems. These can be mixed and matched to achieve the desired load thrust and the complexity of the application. Typical systems can be configured in the following formats:

### Multiple Forcer

Multiple forcers on the same axis share the same bearing rail and shaft and can be synchronized, or act independently. This is a unique feature of linear motor systems and is impossible in a ball-screw system. This capability allows for greater flexibility in automated assembly applications, or test machines and provides a cost effective and space efficient solution.

### Tandem Drive System

To multiple force in a linear system, multiple forcers can be used on the same axis while sharing the same bearing, rail, shaft, and servo driver. Locate the Dual forcer information on the data sheet and refer to Page 33 of this installation guide to learn more about using a tandem drive system.

Running the Linear Shaft Motor allows for greater flexibility in automated assembly applications, or test machines and provides a cost effective method of increasing force. Tandem drive motors must be mechanically connected together so they act as a single coil.

### Parallel Drive System


The Linear Shaft Motor can be used in parallel (two or more sliders and two shafts connected to the same load), to achieve large thrusts for moving heavy objects. This is a unique feature of the Linear Shaft Motor and due to its non-critical air gap, it is very simple to implement. The Parallel Linear Shaft Motors will be synchronized when using one servo driver and one encoder. This allows the best method for providing force evenly across the load. Like a tandem drive system, a parallel drive system must be mechanically connected together so the motors are able to work as a single coil.

Standard temp. difference between the coil winding and the forcer surface

Type	Standard Temp. Difference (°C)
S040	10
S080	10
S120	15
S160 L160	15
S200	20
S250 L250	20
S320 L320	25
S350	25
S427 L427	40
S435	30
S500	40
S605	40
S1000	40

If large masses are added, values can as much as double

**Table 3**

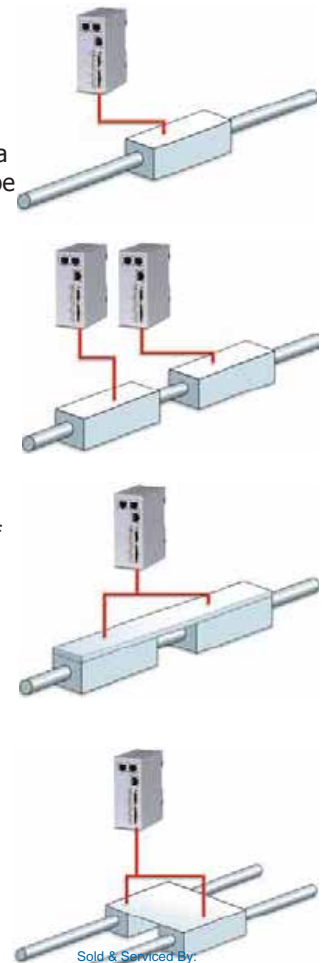

Sold & Serviced By: **ELECTROMATE**

Toll Free Phone (877) SERV098  
**NIPPONPULSE.COM** 1-877-575-0999

www.electromate.com  
 sales@electromate.com

# Installation

## Unpacking

- Check packaging for signs of damage.
- Remove packaging. Do not discard. In the event items need to be returned to Nippon Pulse, it is recommended that the original packaging be used.
- Ensure the packing slip correctly reflects your order and the items delivered.
- Check equipment for signs of damage. Never use the equipment if it appears damaged in any way.
- Read and understand this Installation Guide before installing and using the equipment.

## Precautions

- Since the shaft has a strong magnetic force (5000 ~ 7000G), it is recommended that you use non-magnetic material for the system structure when possible.
- If magnetic material is required, please arrange it at such a distance that it will not be affected by the magnetic attraction of the shaft.
- The magnetic force may cause bending in longer shafts. Take special care when the shaft is longer than 500mm.
- The Linear Shaft Motor assembly has no directivity, but the forcer coil does have an operating directivity when related to the shaft. The lead wires should be carefully arranged with this aspect in mind to keep the leads from being tangled.
- Physical contact between the shaft and the forcer should be avoided. Although contact between the shaft and forcer does not cause any catastrophic problems in operation, their contact does cause added intermittent friction, thereby making the setup and adjustment of the system troublesome.
- During continuous operation, the forcer will heat up. Heat radiation and insulation should be considered. Proper ventilation needs to be provided to remove the heat generated in the forcer.



**Please locate the Data Sheet for your Linear Shaft Motor before continuing.**

Installation should conform to the National Electrical Code as well as local codes and practices. When other devices are coupled to the motor, be sure to install protective devices to prevent accidents. Machinery that is accessible to personnel should provide protection in the form of guardrails, screening, warning signs, etc.

## Mechanical Basic

The installation of your Linear Shaft Motor is very simple. Installation should be possible after reviewing these few key points.

### Shaft



**When using hand tools around the shaft keep in mind, the magnetic field emanating from the shaft is very strong; always use extreme caution.**

Since the shaft contains strong magnets, its proximity to ferrous parts, or parts sensitive to magnetic fields, should be carefully considered.


### Alignment

It is a good practice for the shaft to be mounted so it maintains concentricity with the central bore of the forcer. When the forcer and shaft are aligned correctly there is a nominal radial air gap of between 0.5 to 5.0mm depending on the series of Linear Shaft Motor you are using. Where practical, the air gap should be consistently maintained along the entire length of travel. On longer strokes the shaft may not stay concentric along the entire length of travel. As long as the shaft does not touch the central bore of the forcer the system will run correctly.

This 'large' air gap is non-critical, but the forcer should not rub against the shaft. While contact between the shaft and forcer does not cause any problems in operation, their contact causes added intermittent friction, thereby making the setup and adjustment of the system troublesome.



Due to the simply supported nature of the shaft, on longer systems the shaft will have a tendency to sag in the middle due to gravity. This can be overcome, to some extent, by inducing an upward bow into the shaft. **(Figure 9)** Two common methods of doing this include using shims at angle the end clamps or providing screw adjustment to angle the end clamps. Verify that the shaft does not exceed the maximum bending as shown in the Data Sheets for your Linear Shaft Motor.

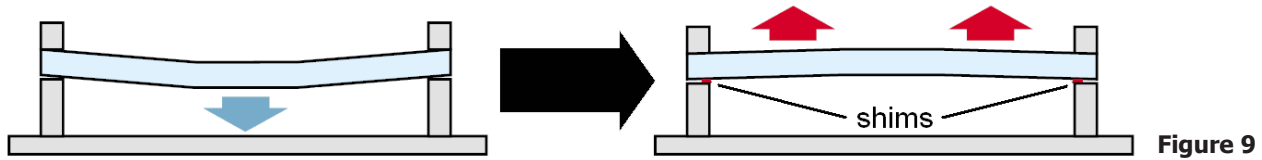

When using two motors in parallel, confirm both shafts and forcers are installed the same direction and they are parallel to each other.




**NOTE: The shaft is not a load-bearing component. Do not use it as a bearing surface.**

The shaft is not intended to withstand radial loading. An accompanying linear bearing should always be used.

### Forcer

It is good practice for the forcer to be electrically earth grounded through the forcer case. For CE type forcers the earth ground is available through the motor cable.

The end of the Linear Shaft Motor forcer where the lead wire exits should be toward the North end of the shaft marked with a yellow dot **(Figure 10)**. This is most critical when designing systems with tandem and parallel Linear Shaft Motors driven with one servo driver. The linear encoder should also be installed to count up in this direction of travel. If it does not, the A and B encoder signals should be exchanged.

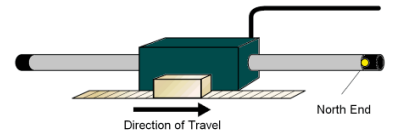


**Figure 10**

**If you need more explanation the procedures outlined in the “Advanced” section can serve as a general guideline to your Linear Shaft Motor installation and alignment.**

### Mechanical Advanced

The procedures outlined in the advanced section can serve as a general guideline to your Linear Shaft Motor installation and alignment. This is not, and is not intended to be, a step-by-step installation guide. Individual application requirements will vary depending on the design of your system. These guidelines should provide a general starting point for basic designs. The guidelines assume the system has been mounted in a horizontal plane. Systems that have been mounted vertically, sideways, or upside down, will require a slightly modified procedure.

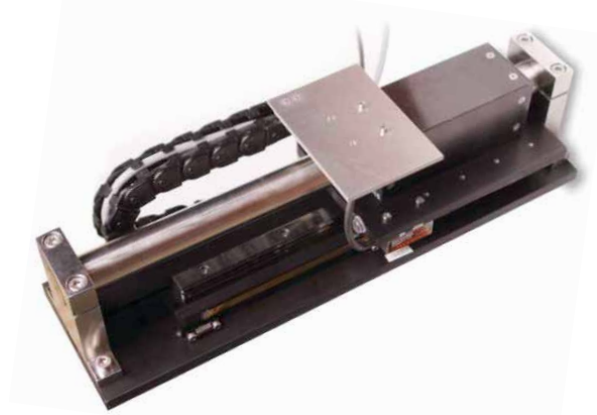


**Note:** Before carrying out these procedures, ensure there are non-ferrous (cardboard, wood, aluminum, etc.) packing pieces available to insert between the shaft and bearing rail. These packing pieces must be non-ferrous due to the magnetic nature of the shaft. The use of these packing pieces is essential, as the shaft is attracted to the bearing rail; the force with which they will ‘snap’ together is great. This situation may cause personal injury, and is likely to cause irreparable damage to the shaft or other structures. It is recommended the protective wrapping material be left on the shaft during installation. Unpack the magnet shaft and place it on a clean, non-magnetic surface away from other magnet devices and any other ferrous material.

## Shaft Support

It is recommended at least one shaft support, the width of the recommended support length on the Linear Shaft Motor data sheet, be used. If using two shaft supports at each end of the shaft, confirm that the shaft supports are spaced according to the specified support length as outlined in the data sheet. **(Figure 11)**

The shaft support system should allow for adjustability, so the shaft may be aligned with the central bore of the forcer.

Because of the simple support structure of the motor, on longer systems the shaft will have a tendency to sag in the middle due to gravity. The shaft support system should allow for the ability to adjust for the bow. Common methods of doing this include the use of shims or providing screw adjustment to angle the end clamps. This is discussed in more detail in the "Shaft Alignment" section.

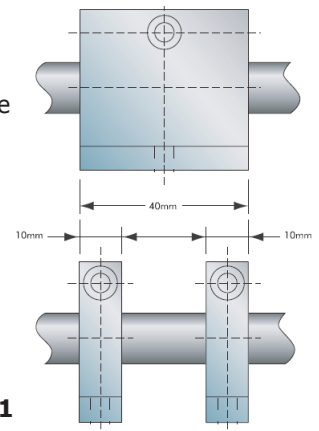


**Figure 11**

## Forcer/Shaft Installation

### Single Drive System


The end of the Linear Shaft Motor forcer with the lead wire exiting should be toward the direction of the marked end of the shaft. See **Figure 12**. The linear encoder should also be installed to count up in this direction of travel. If it does not, the A and B encoder signals should be exchanged.

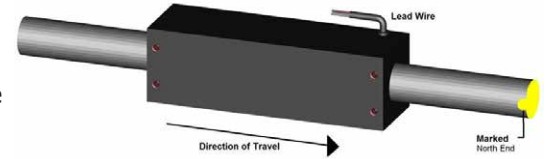

**Figure 12**

### Tandem Forcers


Locate the Tandem forcer information on the data sheet. Please note the forcer spacing and if the second forcer needs to be flipped. If the second forcer has to be flipped, it will need to be installed on the shaft in a direction reversed from the first forcer **(Figure 13)**. The U and V leads from the second forcer will also need to be swapped. The forcer with the lead wire and serial number away from the marked end of the shaft will be considered the second forcer.

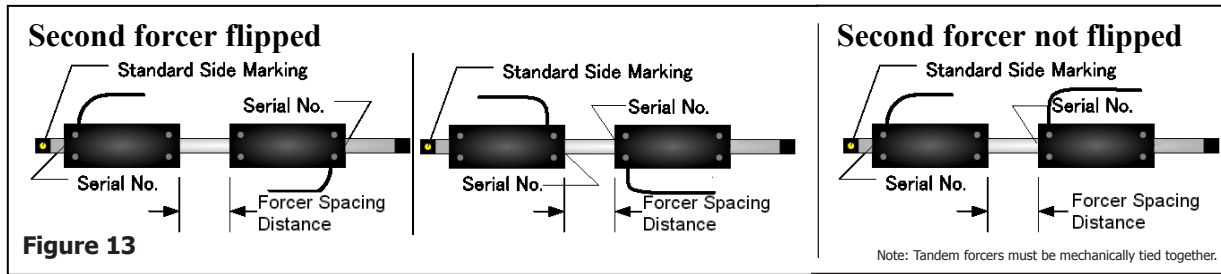

### Parallel Forcers


The Linear Shaft Motor can be set up in a parallel configuration with relative ease. It can be run in a parallel system using only one encoder, one drive, and one amplifier. When used in a parallel system, the Linear Shaft Motor will greatly increase force in any application. Motors used in parallel must be mechanically connected together.

Users of the Linear Shaft Motor in parallel must keep in mind some simple design considerations. The motors must be aligned in the same direction, meaning the yellow marks are on the same end of the system. Linear Shaft Motors must be physically coupled with a mechanism, which when applied, allows the axis to realize only one-degree-of-freedom of movement.

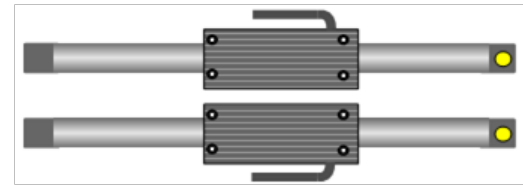

**Figure 14**

Both forcers must be oriented the same direction on their shafts. Nippon Pulse recommends the Serial Numbered end of the forcer be pointing toward the end of the shaft which is marked with yellow paint. If the orientation of the coils is different, it is possible to have a totally inoperable system, a runaway system, or significant loss of thrust. The standard for parallel drive system is for mirrored cable exit locations **(Figure 14)**. Like tandem forcers, Linear Shaft Motors in a parallel configuration must be mechanically tied together **(Figure 15)**.

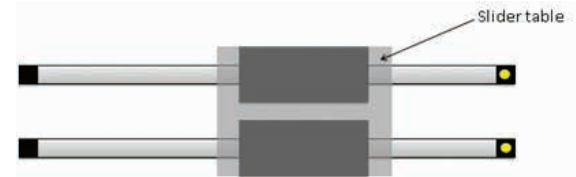

**Figure 15**

1 - This procedure can serve as a general guideline to your Linear Shaft Motor installation and alignment. This is not, and is not intended to be, a step-by-step installation guide since your system components will be very dependent on your design and may be very different from what is described here; however, our hope is that these guidelines will be helpful. The guidelines assume that the system has been mounted in a horizontal plane. Systems that have been mounted vertically, sideways, or upside down, will require a slightly modified procedure.

## Offset Motors

Multiple motors can also be aligned in an off-set configuration but must follow the specifications in **Tables 4/5** and **Figures 14/15**.

Model	$\Delta x$ (mm)
S040	0.25
S080	0.42
S120	0.67
S160	0.83
S200	1.00
S250	1.25
S320	1.67
S350	1.67
S427	2.50
S435	2.50
S500	2.50
S605	3.33

Table 4

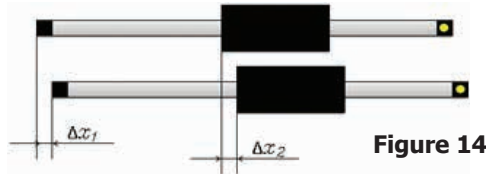


Figure 14



Figure 15

Model	P (mm)
S040	18
S080	30
S120	48
S160	60
S200	72
S250	90
S320	120
S350	120
S427	180
S435	180
S500	180
S605	240

Table 5

## Short Strokes

When installing the Linear Shaft Motor it is necessary to adjust the position of the shaft in relation to the central bore of the forcer.

An example of a procedure that has been used is detailed to the right. After both supports have been adjusted, remove the packing pieces and move the forcer, by hand, along the whole length of travel, visually checking the alignment of the shaft in relation to the central bore of the forcer.

On systems over 1m, there may be some deviation from concentricity, but as long as the shaft does not touch the central bore of the forcer, over the whole length of travel, the system will run correctly. When the shaft touches the central bore of the forcer there may be an increase in resistance to the movement of the forcer.


### Sample short stroke forcer/shaft alignment<sup>2</sup>:

1. First, ensure the packing pieces are inserted between the shaft and bearing rail. These pieces do not need to be a tight fit but should be spaced no further than 500mm apart.
2. Temporarily tighten one of the supports; loosely tightening the base bolts and fully tightening the shaft clamp bolt.
3. Slide the forcer to approximately 50mm from this support; removing and replacing the packing pieces as required.
4. Adjust the position of the support so that the shaft is aligned concentrically with the central bore of the forcer. The correct position can be determined by eye alone.
5. Tighten the base bolts, ensuring the position of the support does not change while doing so.
6. Repeat the procedure for the other shaft support.

## Long Strokes

Because of the simple support structure of the motor, on longer systems the shaft will have a tendency to sag in the middle due to gravity. This can be overcome, to some extent, by inducing an upward bow into the shaft. Two common methods of doing this include; using shims (**Example #1**) to angle the end clamps or providing screw adjustment (**Example #2**) to angle the end clamps. Verify that the shaft does not exceed the maximum bending as shown in the Data Sheets for your Linear Shaft Motor.

Both of these alignment methods of the shaft requires the 'simultaneous' adjustment of both of the shaft supports. Below is an example of an adjustment using shims<sup>3</sup>.

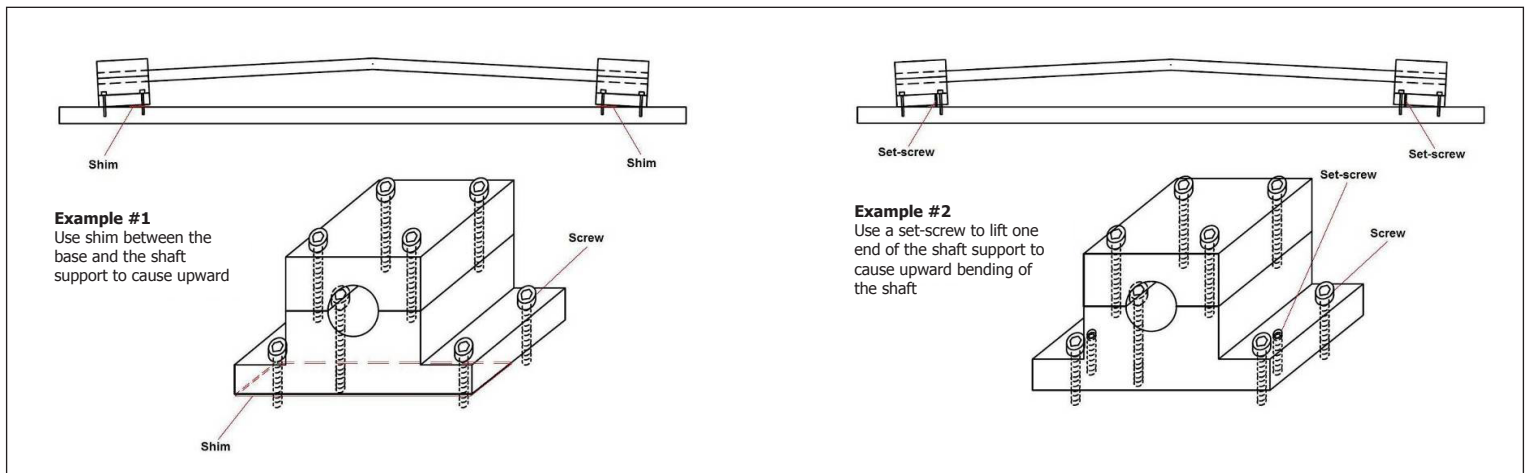

2 - This procedure can serve as a general guideline to your Linear Shaft Motor installation and alignment. This is not, and is not intended to be, a step-by-step installation guide since your system components will be very dependent on your design and may be very different from what is described here; however our hope is that these guidelines will be helpful. The guidelines assume that the system has been mounted in a horizontal plane. Systems that have been mounted vertically, sideways, or upside down, will require a slightly modified procedure.

3 - This procedure can serve as a general guideline to your Linear Shaft Motor installation and alignment. This is not, and is not intended to be, a step-by-step installation guide since your system components will be very dependent on your design and may be very different from what is described here; however our hope is that these guidelines will be helpful. The guidelines assume that the system has been mounted in a horizontal plane. Systems that have been mounted vertically, sideways, or upside down, will require a slightly modified procedure.

## Sample long stroke forcer/shaft alignment

**Stage 1:** When installing the shaft supports and Linear Shaft Motor, start by using a temporary shim. The size of the final shim will vary depending on the length of system, and therefore how much bow needs to be induced into the shaft to overcome the natural sag due to gravity. The shim size will normally be between 0.3mm and 1.0mm (a 0.8mm shim is a good starting point).


Insert a shim below both inner bolts, on each of the supports, between the support and the bottom plate. Please see the illustration on the previous page with example #1 for clarification. Tighten the bolts, on each support, enough to hold the shims in place and force the support against the bottom plate. Tighten the top bolts both to hold the shaft rigidly in the supports.

**Stage 2:** Position the whole shaft support.

1. First, ensure packing pieces are inserted between the shaft and bearing rail. These pieces do not need to be a tight fit but should be spaced no greater than 500mm apart.
2. Temporarily tighten one of the supports; loosely tightening the base bolts and fully tightening the shaft clamp bolt.
3. Slide the forcer to approximately 50mm from this support; removing and replacing the packing pieces as required.
4. Adjust the position of the support so that the shaft is aligned concentrically with the central bore of the forcer. The correct position can be determined by eye alone.
5. Tighten the base bolts, ensuring that the position of the support does not change while doing so.
6. Repeat the procedure for the other shaft support.

**Stage 3:** After both supports have been adjusted, move the forcer to the middle of travel, and remove the packing pieces (The forcer is moved to the middle of travel, to stop the shaft from 'snapping' down onto the bearing rail, in the event of an error being made during the shaft support adjustment). Move the forcer, by hand, along the whole length of travel, visually checking the position of the shaft in relation to the central bore of the forcer. The shaft will not stay concentric along the whole length of travel, but as long as the shaft does not touch the central bore of the forcer the system will run correctly. The shaft will look similar to the one shown in **Figure 18**.

**If the shaft touches the central bore of the forcer, it will be evident by an increase in resistance to the movement of the forcer. If this occurs, the shaft will need to be realigned. Minor adjustments can be made by repositioning of the whole support; larger adjustments will require different size shims to be used in stage 1 of the adjustment. Rubbing in the center will require larger shims, while rubbing at 1/3 from ends will require smaller shims. Always remember, before undoing any of the shaft support bolts, packing pieces should be inserted between the shaft and the bearing rail.**

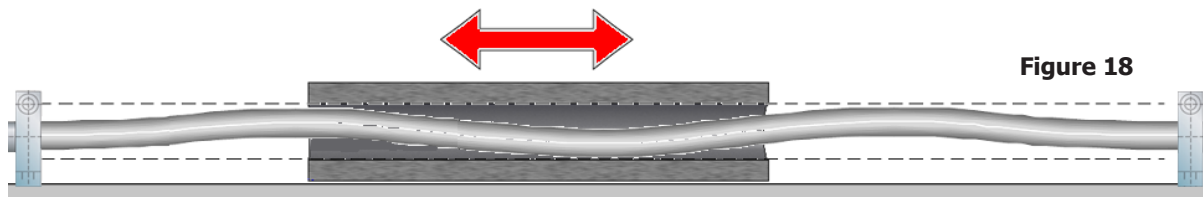

## Encoder Installation

Encoders should be installed according to the encoder manufacturer's installation information. Attention should be given to the proximity of the encoder to the shaft, due to the shaft's strong magnetic field. This is particularly important when using magnetic type encoders.

The direction of count of a two-channel (Quadrature decoded) incremental encoder is defined such that a signal denoted as channel A should lead channel B when the motor is moving in the forward direction. It is sometimes impossible to mount the encoder systems so that the counts will conform to this convention. Under these circumstances, it is necessary to reverse the direction of count as seen by the controller. There are two possible methods of reversing the direction of the count from an incremental encoder, both described below.

- If a channel is inverted (i.e. A wired to A- and vice versa) then the signal from channel A will then lag behind channel B. This will cause the controller to reverse the count as perceived from the encoder.
- If the signals from channel A and channel B are swapped completely with one another (i.e. A+ wired to B+, A- wired to B-, and vice versa), this will result in channel B leading channel A, and reverses the count.

4 - This procedure can serve as a general guideline to your Linear Shaft Motor installation and alignment. This is not, and is not intended to be, a step-by-step installation guide since your system components will be very dependent on your design and may be very different from what is described here; however, our hope is that these guidelines will be helpful. The guidelines assume that the system has been mounted in a horizontal plane. Systems that have been mounted vertically, sideways, or upside down, will require a slightly modified procedure.



### **Magnetic encoders**

If the rod and strip come into contact, or are in very close proximity with one another, then the magnetic profile in the strip will be permanently damaged. The magnetic encoder must be shielded from the motor's shaft or must be at least one N-N magnetic pole pitch from the shaft.

### **Cable Carrier**

When the Linear Shaft Motor is used with a moving forcer, it is recommended a cable carrier is used. The cable carrier will help guide and prevent damage to the motor cable, encoder cable, and any accompanying cables or hoses attached to the forcer.

For short stroke systems it may not be necessary to use a cable carrier, but the use of strain relief is recommended.

The cable that exits the forcer is not a high-flex type; therefore, it must terminate before entering the cable carrier. Cable undergoing dynamic movement should be protected and have a method of strain relief, ideally protected within a cable carrier. It is important to lay any cables, or conduit, neatly within the cable carrier to prevent damage to them, and to minimize the friction of the system due to the cable carrier binding. All static cables should be routed in such a way that they are protected from being damaged by parts of the machine or secondary moving parts.



### **Operation Considerations**

The motor must always be operated within the specified operating parameter limits. Exceeding those limits will permanently damage the motor. The following steps must be completed to ensure safe and proper operation.

Verify that all electrical wiring and cables are properly connected. Refer to the manual provided with the driver for this information.

1. Adjust the servo driver current to match the motor's current specification. See the data sheet.
2. Refer to the motor specifications for operating parameters. Adjust the control parameters to the motor data specifications as necessary.
3. Adjust the control for the proper P.I.D. loop tuning. Begin at a low gain setting and increase the gain as necessary.
4. Strain relieve the wires prior to operating.



The cable that exits the forcer is not a high-flex type; therefore it must terminate before entering the cable carrier.

Cable undergoing dynamic movement should be protected and have a method of strain relief, ideally cable should be protected within a cable carrier. It is important to lay any cables, or conduit, neatly within the cable carrier to prevent damage to them, and to minimize the friction of the system due to the cable carrier binding. All static cables should be routed in such a way that they are protected from being damaged by parts of the machine or secondary moving parts.

Using the supplied connector provided with the Linear Shaft Motor, connect cables before entering the cable carrier. This connector attaches to the high-flex cable in the cable carrier. This allows maintainability of the high-flex cable without have to removing the forcer. Required for proper operation, is a good shield connection on all cabling. Cables should be tied together in a twisted pair configuration, shielded, and grounded properly to the machine base, servo amplifier, and motor in order to reduce RFI.

Note the forcer is electrically earth-grounded through the forcer case, for CE type forcers the earth ground is also available through the motor cable.

### **Mounting Orientation**

There is no restriction on the angle or orientation at which the system can be mounted. If the system is to be mounted in a vertical orientation, it is recommended a counter-balance be used. If the load is not counter-balanced, the motor must always work against gravity, even when it is not moving. This should be taken into consideration when sizing the motor. The counter-balance should be designed to balance the gravitational force acting on the system, which is the weight of the forcer and the payload. If a system is properly counter-balanced, when no power is applied to the forcer it should remain stationary.

## Electrical Installation




**Note:** The lead wire supplied with the Linear Shaft Motor is not intended for use in a cable carrier. It is suggested you use the supplied connectors for connection to a suitable cable for continuous operation.

All connections to the motor are made through the flying leads exiting on the side of the motor. High voltages can be present. Ensure all power is removed from the motor before connecting or disconnecting the motor.

### Power and Control Connections

All the power and control connections are made through the Linear Shaft Motor's forcer assembly. For an example of an integrated configuration using the Linear Shaft Motor and amplifier / controllers, refer to **Figure 19**.

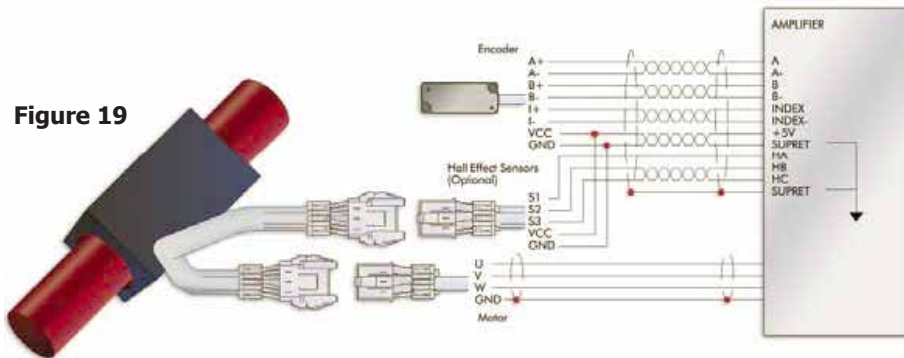

**Figure 19**


The data sheet for your Linear Shaft Motor identifies the color, function, and length of the wire in the forcer assembly. Connect the three wire (U, V and W) flying leads exiting on the side of the motor to the Servo amplifier. For correct operation, the flying leads on the end of your motor cable should be connected as detailed in your servo amplifier instructions. These wiring connections may be indicated on your servo drive connector as; U, V, and W; or R, S and T; or M1, M2, and M3, or A, B and C; or simply 1, 2 and 3.

### Hall effects



If your Linear Shaft Motor has the Hall effect option, connect S1, S2, S3, GND, and VCC connection for the Hall effects to the respected input terminals of the driver. Suitable cable should be selected for use between the Linear Shaft Motor and the driver. Consideration should be given to shielding and bending radius cable when used in a cable carrier.

The Linear Shaft Motor uses EW500 Hall Sensor. The circuit is shown in **Figure 20**.

As shown in **Figure 21**: S1 – U, S2 – V, S3 – W

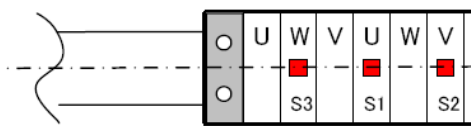

**Figure 20**

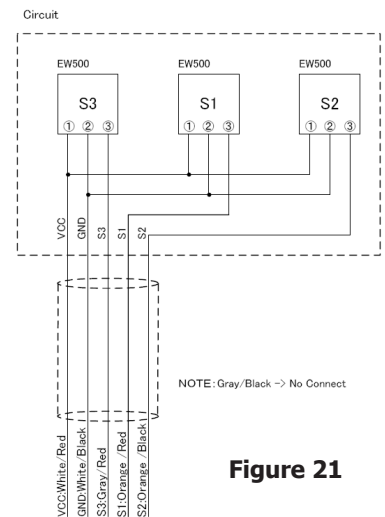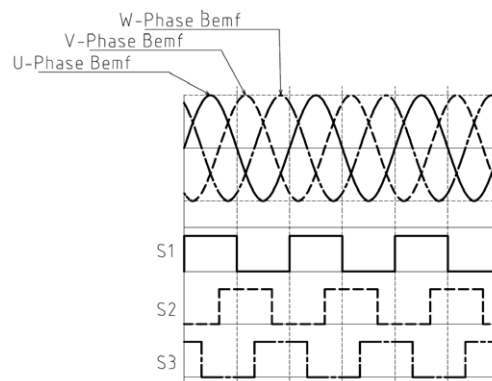


**Figure 21**

## Tandem Forcers

If your system makes use of Tandem forcers, locate the tandem forcer information on the data sheet (**Table 4**). Please note the forcer spacing and if the second forcer is to be flipped. If the second forcer is to be flipped, it will need to be installed on the shaft reversed from the first forcer. The U and V leads from the second forcer also need to be swapped.

### Wiring Tandem Forcers

When the second forcer is not flipped, wire the 2 forcers as follows: Both forcers will need to be installed on the shaft in the same direction. Wire the two forcers to the Driver as



When the second forcer is flipped, wire the 2 forcers as follows: The second forcer will need to be installed on the shaft reversed from the first forcer.

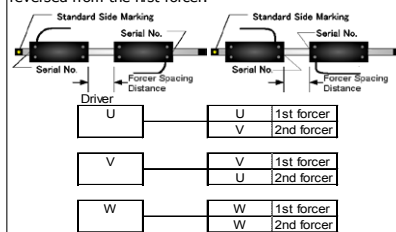


Table 4

## Encoder and other Sensors

Connect the encoder and other sensors -- OTL (Over Temperature Limit), Limit Switches, and Air Sensors-- to the driver. Please refer to the instruction manual of the driver and device being connected to confirm correct connection.

## Grounding

The motor-ground must be connected at both the servo amplifier's earth-ground terminal and the body of the forcer. When using a CE type motor, the motor-ground is available through a ground screw. Always keep the connection between motor and the earth-point as short as possible. For best results, use a heavy gauge, multi-strand earth strap.

## Electromagnetic Compatibility (EMC)

The ultimate responsibility for ensuring the Electromagnetic Compatibility of a system lies with the OEM.

## Motor

All motor windings are contained within the aluminum housing of the forcer. This housing provides very effective screening from the noise imitted by the high switching currents associated with a pulse width modulated amplifier, and is also very effective at preventing external sources of noise from affecting the electronics contained in the termination pocket.

## Hall Effect Devices

Digital Hall effect devices have built in noise immunity that comes from using digital electronics.

## General Precautions

Although the motor's EMC performance is very good, it is still advisable to take precautions to minimize the risk of any Electromagnetic Interference (EMI) in your application. These precautions include:

- Keep all cable routing as short and direct as possible
- Avoid routing signal cables alongside power cables or close to "noisy" components like mechanical relays.
- Where shielded cables are provided, ensure that the shield termination is as short and direct as possible. Do not use "pig tails" to terminate shields.

## Servo Driver

The following information can serve as a general guideline to your servo driver installation and alignment. This is not, and was not intended to be, a step by step installation guide since your system components will be very dependent on your design and may be very different from what is described here; however our hope is that these guidelines should be helpful.

### Basic PID(F) Servo Controller Setup

PID(F) controllers use the error between the desired position of the motor and its current position to control the force that the motor will produce. PID refers to proportional, integral and derivative terms applied to this error (referred to as the following error) that are used in this type of control system. Many of these controllers will also have feed-forward terms (F) to help reduce the response times of the system. In order for the controller to move the system to the desired position it is necessary to set values to these terms. The process of selecting the value to which these parameters should be set is called tuning. In order to tune a system it is necessary to understand the effect of each of the terms. Refer to your servo tuning guide for detailed information.

### Proportional gain

The proportional gain in a system causes the motor to produce a force directly proportional to the following error. The further away from the desired position the motor, the greater the following error and the greater the amount of correcting force produced. As this value is increased the position error is reduced. It is possible to use too large a value of proportional gain, as the system can become unstable. This parameter also provides stiffness when in position.

### Derivative/Velocity feedback gain

One method of stabilizing a system requiring a high proportional gain is to introduce a velocity feedback factor into the loop. This parameter reduces the force that is available to the motor as the speed of the motor increases. Although this allows higher gains to be used, there is still a limit to the maximum value, as the system will still become unstable if very large values of velocity feedback are used.

### Integral gain

When the above two terms have been set there may still be an unacceptable following error in the system. This integral term is combined with the following error in a continuously incrementing accumulation to produce a force to drive the motor. Because of the time dependency of this term, it tends to have a much slower response rate when compared to the above two terms. For most systems, a quick response is required, and so a high value for this gain is tried. Unfortunately, even at fairly low values this term can cause the system to become unstable. For linear systems this term is generally very small, or set to zero.

### Feed-forward gains

There are several different types of feed-forward gains that are available, depending on the controller type. Velocity, acceleration, deceleration and friction feed-forward compensation are a few of the common ones. During a move, feed-forward terms allow the controller to produce a force based upon the commanded move rather than on the following error. An example would be to consider the acceleration feed-forward term. Using Newton's law of motion,  $F=MA$ , it is possible to assume that if an acceleration is required, then a certain current needs to flow in the motor windings (force is directly proportional to current). An acceleration feed-forward term would produce a command signal that could be expected to achieve this acceleration. This does, however, mean that the feed-forward terms are open-loop in nature. Just as with all the other gains, if any feed-forward terms are too large the system will be unstable. In general, the feed-forward terms are used to minimize following errors and improve system response time. Unfortunately, there is no universal method of tuning, or predetermined gain values, that can be used on all servo controllers commercially available. Each servo controller has specific control algorithms and scaling.



# Maintenance and Service

When correctly installed, the Linear Shaft Motor system requires little maintenance. The Linear Shaft Motor systems contain no parts that undergo frictional contact. When incorporating a Linear Shaft Motor system, care should be taken to allow access for routine maintenance of the bearing and encoder systems and any other additional equipment. The Linear Shaft Motor itself is entirely maintenance free. It does not have any parts that can wear out.

Nippon Pulse recommends you periodically perform minimal inspections.

Periodically:

- Check that the forcer can move freely over the entire stroke
- Clean any accumulated debris from the shaft surface (ferrous material in particular can be attracted to the shaft)
- Check the bending of the shaft
- Check all parts are tight and secure
- Check all flexing cables for signs of wear and/or damage

The forcer contains the stator coils; these are potted into the aluminum housing with an epoxy resin. The aluminum housing and the coils are therefore, in effect, a single piece and there is no maintenance needed. If, however, wear has been noted on the shaft, then the central bore (internal diameter of the coils) should be inspected for wear, or excessive ingress of foreign matter. The shaft will need to be removed from the bore of the forcer to do this.

The shaft is NOT a bearing surface, and should NOT be oiled or greased. When correctly set up there should be no maintenance requirements for the shaft. However, on long systems where the possibility of the shaft rubbing on the central bore of the forcer is high, regular checks should be made for correct alignment.

The only contact and source of friction is in the external linear bearing. The external linear bearing must be lubricated from time-to-time according to the slide manufacturer's specifications. Please consult the bearing manufacturer for recommendations on lubrication types and lubrication intervals.

If a roller bearing or an air bearing system is used to guide the load, there may not be any maintenance at all.

## Service

The Linear Shaft Motor is not designed to be serviced in the field. In the rare event of a malfunction, please contact Nippon Pulse for return authorization.

4 Corporate Dr.  
Radford, VA 24141, USA  
Phone: 1-540-633-1677  
E-mail: [info@nipponpulse.com](mailto:info@nipponpulse.com)  
Web: [www.nipponpulse.com](http://www.nipponpulse.com)

# Troubleshooting Guide

This section covers symptoms, probable causes and solutions related to the Linear Shaft Motor. It lists the most common symptoms of irregular operation, and the possible causes and solutions for these faults. Most problems encountered during installation can be traced to a few basic mechanical alignment problems, or incorrect/noisy wiring. A logical and methodical approach to trouble-shooting is essential to isolating and resolving these problems. Common problems include:

- Mechanical alignment of the shaft
- Incorrect tuning of the servo controller and/or drive
- Motor power and Hall effect devices incorrectly wired
- Encoder feedback failure
- Motor over-temperature
- Motor over-current
- Improper setting of current in drive



**The magnetic attraction between the magnet shaft and other magnetic or ferrous materials is extremely high. Keep fingers and other body parts away from these objects to avoid injury.**



**Before performing the tests described in this section, be aware that lethal voltages may exist on the motor connections. A qualified service technician or electrician should perform these tests.**

Symptom	Probable cause	Corrective Action
Linear Shaft Motor does not move freely by hand when power is not applied to the system	Forcer rubbing against shaft	Realign forcer so its bore is concentric with the forcer per the instructions the Installation Section (page 18)
Encoder counts when motor is not moving	Encoder shield not connected	Connect encoder shield
	Amplifier/motor noise	Check shields and earth grounds (See Installation Section page 32) Route encoder cables away from motor cable at controller
Encoder feedback failure or intermittent feedback	Encoder not set up correctly	Adjust encoder per encoder manual
	Encoder scale dirty	Clean scale
	Encoder strip scratched (optical)	Replace encoder strip
	Encoder strip damaged (magnetic)	
Encoder read head failed	Replace Encoder Sensor	
Linear Shaft Motor runs unevenly	Incorrect number of encoder counts per pole pitch for commutation	Recalculate counts per pole pitch (See Engineering Notes page 23)
	Servo gains set incorrectly	Re-tune system
	Current offsets in drive amplifier	Contact drive supplier
	Shaft damaged due to excessive heat	Replace shaft (contact Nippon Pulse)
	Earth ground/shields not connected correctly	Check connections (See Section Installation page 31, 32)
	Incorrect pole pitch set up or phase offset between position sensor and forcer back EMF	Check drive or controller set up

Linear Shaft Motor stalls on power up	Hall effects not connected correctly	Check Hall effects connections (See Section Installation page 31)
	Motor power not connected correctly	Check motor connections
Linear Shaft Motor runs away (Positive Feedback)	Polarity of control signal and encoder count direction are opposite	Ensure a positive force or velocity command from the servo controller yields an increase in the reported encoder position (See Section Installation page 26)
Amplifier fails to enable	Faulty Wiring	Check and correct wiring
	Limit switches active	Move motor away from limits, or disable limits at controller
Linear Shaft Motor drifting	Exceeding encoder frequency specifications of amplifier	Reduce linear motor speed
	Electrical noise affecting read head	Check for grounding loops
The shaft is discolored	Motor exceeded rated temperature	Check continuous current setting
		Measure motor phase resistances
Linear Shaft Motor fails to phase align on power-up	Motor/encoder/Halls not wired correctly	Check connections (See Chapter Installation page 22)
	Insufficient travel available to complete phase sequencing	Clear obstruction
		Replace shaft with longer shaft (contact Nippon Pulse)
Insufficient phase search current	Check amplifier setting	
Forcer locks into certain positions on the shaft	Hall effect signal missing	Check connections
	Motor phase not connected	
Linear Shaft Motor feels coggy	Ferrous materials used in stage	Replace ferrous parts with non-ferrous materials.
	Phase wires shorted out	Unshort phase wires
Shaft pitted or scarred	Forcer rubbing on shaft	Realign forcer so its bore is concentric with the forcer per the instructions in Installation Section
RMS over-current fault	Move regimen too strenuous for payload being carried, and the motor's capabilities	Reduce commanded accelerations and or velocity
	Incorrect drive settings for motor	Reduce payload
Following error	System can not follow commanded move velocity and/or acceleration.	Correct drive settings
	Encoder signal failure, or intermittent encoder signal	Reduce commanded speed and/or acceleration
	Following Error Window set too tight	Check encoder signal with drive disabled
	System not tuned properly	Increase following error window
System is not repeatable	Servo system is not tuned properly for application	Adjust tuning parameters per your servo control's instructions
	Settling time is not sufficient to meet settling window requirements	Adjust tuning parameters
System vibrates when servo loop closed	Servo controller gains set too high, or incorrectly	Increase allowable settling time
		Reduce gains and retune system

Linear Shaft Motor moves the wrong direction	Polarity of control signal and encoder count direction are opposite	Ensure a positive force or velocity command from the servo controller yields an increase in the reported encoder position (See Section Installation page 26)
	Control's direction sense is not set correctly for your application	Switch direction sense
Linear Shaft Motor does not move and produces no force	Drive not powered	Check all connections to make sure they are tight and secure, and the power is turned on.
	Linear Shaft Motor phase is not connected to drive	Check phase connections to the drive
	Over-temperature sensor setup but not connected	Check settings and connection of over-temperature sensor and the drive
	Linear Shaft Motor is over-temperature	Allow forcer to cool (see symptom below)
Linear Shaft Motor does not move but does produce force	One or more of the motor phase connections are missing or connected improperly	Check phase connections to the drive make sure they are tight and secure.
	One or more of the position sensor connections are missing or connected improperly	Check position sensor connections to the drive make sure they are tight and secure
	The Linear Shaft Motor is mechanically blocked	Check to see that the Linear Shaft Motor is free to move
Linear Shaft Motor gets too hot	The Linear Shaft Motor is being driven beyond its designed load carrying capacity	Turn off the machine and call Nippon Pulse to double check the proper sizing
Linear Shaft Motor moves but the commanded position is not what it is supposed to be	There is improper reading of position from the encoder by the driver	Align the encoder's linear scale properly so that it is exactly parallel to the rail guide, linear bearing, or air bearing being used

# FAQ

## Q. What is a Linear Shaft Motor?

A. Linear Shaft Motors are direct drive linear servomotors that consist of a shaft with permanent magnets and a forcer of cylindrically wound coils.

## Q. What routine maintenance is required for Linear Shaft Motors?

A. The Linear Shaft Motor itself is entirely maintenance-free. Because of its simple structure, the Linear Shaft Motor does not have any parts that can wear out. However, Nippon Pulse recommends you perform periodic inspections on all systems, including the bearings and supports. See the Maintenance and Service section of the Installation and User's Guide for details about the recommended inspections.

## Q. What is the reliability of the Linear Shaft Motor?

A. The Linear Shaft Motor is a non-contact device. As such, it does not have any parts that can wear out. If the system is designed properly and the operating parameter limits are not exceeded, the Linear Shaft Motor should last indefinitely.

## Q. What advantages does the Linear Shaft Motor offer over traditional linear motion systems?

A. The Linear Shaft Motor is the first linear servomotor designed for the ultra high-precision market and, as a result, has several advantages over traditional linear systems. The Linear Shaft Motor is compact and lightweight, has no cogging issues, is up to 50 percent more energy-efficient than traditional linear motors, and features a non-critical air gap, which reduces machining costs.

## Q. Are there 3D CAD models of the Linear Shaft Motor available?

A. Yes. There are 3D models of the Linear Shaft Motor available on the Nippon Pulse web site ([www.nipponpulse.com](http://www.nipponpulse.com)). The models are available in practically every CAD format on the market.

## Q. Can the shaft of the Linear Shaft Motor transmit a rotary force?

A. Yes, this is possible. To determine which Linear Shaft Motor is best suited for your application, contact an applications engineer to review your specifications.

## Q. Do magnets ever lose their magnetism over time?

A. The Linear Shaft Motors use rare-earth magnets, which are the strongest magnets available and produce magnetic fields that are significantly stronger than any other type of magnets. However, when operating at high ambient temperatures (>80°C), these magnets can lose strength. Lower temperatures have no effect on the magnets.

## Q. How accurate are Linear Shaft Motors?

A. The Linear Shaft Motor is a high-performance, accurate motor. There is no need to convert rotary motion to linear motion, which is a major source of positioning error among rotary-to-linear systems. While the Linear Shaft Motor does not have inherent resolution, position accuracy is ultimately determined by the linear encoder feedback accuracy and the core stiffness of the motor. Testing has shown that, with encoder resolutions less than 10nm, the Linear Shaft Motor will, at worst, enable a position accuracy of  $\pm 1.2$  pulses of encoder resolution. This position accuracy is not affected by the expansion and contraction of the shaft.

## Q. How fast can the Linear Shaft Motor go?

A. The maximum speed is a two-step calculation. First, max acceleration is calculated by ( $\text{acceleration} = \text{accl force} / \text{mass}$ ). Second, the maximum speed is calculated by ( $\text{velocity} = \text{acceleration} * \text{time}$ ). Outside of this, the Linear Shaft Motor itself does not have inherent speed limitations.

There are several factors that can limit the maximum speed of a Linear Shaft Motor system. The control must provide sufficient bus voltage to support the speed requirements. The encoder must be able to respond to that speed, and its output frequency must be within the controller's capability. Finally, the speed rating of the stage's bearing system must not be exceeded.

## Q. What is cogging?

A. Cogging is a resistive torque or force caused by the interaction of a magnetic field with a ferrous (magnetic, iron-containing) material, even when there is no current present. Cogging causes jerky, uneven motion in servo systems. Because our Linear Shaft Motor contains no ferrous material, it does not experience cogging effects.

## Q. What happens if the system loses power or velocity feedback?

A. If a power loss occurs, the system loses all stiffness. So, if the payload is moving, it will continue to move until it hits a stop or until friction brings it to a stop. If the feedback loop is lost, it may lead to a runaway situation. This condition can be avoided with the use of soft and hard stops as well as braking systems.

## Q. Are linear motors difficult to integrate into a machine?

A. One of the key design aspirations of the Linear Shaft Motor is simplicity. That simplicity extends to the integration process. As all systems are different, it is generally difficult to make specific statements about machine integration that hold true. A Nippon Pulse applications engineer would be happy to assist you with integration questions relevant to your individual project.

**Q. What is RMS Current?**

A. RMS stands for "Root Mean Square." It is the effective average current. It is most commonly used when referring to AC current.

$$I_{RMS} = \sqrt{\frac{(I_{accel}^2 \cdot T_{accel}) + (I_{@vel}^2 \cdot T_{@vel}) + (I_{decel}^2 \cdot T_{decel}) + (I_{settle}^2 \cdot T_{settle}) + \dots}{(T_{accel} + T_{@vel} + T_{decel} + T_{settle} + \dots)}}$$

**Q. What is motor power duty cycle for a linear motor?**

A. Duty cycle for a linear motor is different than for other types of systems. While it is defined as (time on) / (time on + time off) per cycle, in servo systems the motor can be on even when not in motion. Thus, for a servo motor, the duty cycle is based upon the time the motor is actually working (when current is applied) and NOT the percentage of time the motor is moving. It is possible for motor power duty to be 100 percent while the motor is not moving, or for the motor's motion duty to be nearly 100 percent with very low motor power duty.

**Q. Do standard rotary motor electronics work with linear motors?**

A. Yes they do. In most cases, the only differences between the two is the terms used in the software and manuals. For example, torque will become force; RPM will become velocity. A Nippon Pulse applications engineer would be happy to assist you in understanding the corresponding terms in your case.

**Q. Can a Linear Shaft Motor be mounted vertically?**

A. Yes, a linear motor provides the same performance when mounted vertically or horizontally. However, it is recommended that a vertically mounted Linear Shaft Motor be counterbalanced to reduce RMS and counteract the impact of gravity on the motion system.

**Q. Can more than one forcer be used with a single shaft?**

A. Yes, more than one forcer can be used in conjunction with a single shaft as long as the forcers do not physically interfere with each other. Two forcers may also be tied together and driven with one drive to double the output force.

**Q. Are versions of the Linear Shaft Motor available for use in waterproof, vacuum or clean room environments?**

A. Yes, the Linear Shaft Motor can be built for a variety of operating environments. To determine which Linear Shaft Motor is suitable for your application, contact an applications engineer to review your specifications.

**Q. What are the advantages of the Linear Shaft Motor over a lead screw?**

A. The advantages of the Linear Shaft Motor include higher velocities [>240 in/sec (>6 m/s)], non-wear moving part, free movement when power is off, no backlash because there are no mechanical linkages, easier alignments, and easier manufacturing.

**Q. What is the MTBF (Mean Time Between Failure) for the Linear Shaft Motor?**

A. The Linear Shaft Motor components operate in a passive manner when properly designed into your system. As such, there is no MTBF on the motor.

Any installation that causes any component of the motor to be active (example: flexing of supplied lead wires, using shaft or forcer as load-bearing member, etc.) is beyond the intended design of the Linear Shaft Motor. This will void the warranty and is done at your own risk.

With the proper settings, the Linear Shaft Motor will not wear out.

**Q. In a tandem or parallel drive-application, do both motors need Halls?**

A. In the case where both forcers are connected to the same drive, no; only one motor needs Hall effects. In an application where two forcers are connected to the same drive, the same phase of each forcer must be above a like magnetic pole in order to run. As such, only one set of Halls is needed by the servo drive.

In the case of each forcer being connected to separate servo drives that require Halls, yes; you will need Halls on both motors.

**Q. In certain tandem forcer applications, why does one motor need to be physically flipped?**

A. The physical flipping of one of the two forcers in a tandem configuration is sometimes used to reduce the overall footprint while maintaining the magnetic alignment of the two forcers.

Sold & Serviced By:



Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
www.electromate.com  
sales@electromate.com

# Data Sheets

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	S040D	S040T	S040Q	S040X
Continuous Force <sup>1</sup>	0.29N (0.07lbs)	0.45N (0.10lbs)	0.58N (0.13lbs)	0.94 (0.22lbs)
Continuous Current <sup>1</sup>	0.3Arms			0.6Arms
Acceleration Force <sup>2</sup>	1.2N (0.27lbs)	1.8N (0.40lbs)	2.3N (0.52lbs)	3.8N (0.86lbs)
Acceleration Current <sup>2</sup>	1.1Arms			2.2Arms
Force Constant ( $K_f$ )	1.0N/amp (0.23lbs/amp)	1.6N/amp (0.37lbs/amp)	2.1N/amp (0.47lbs/amp)	1.7N/amp (0.39lbs/amp)
Back EMF ( $K_b$ )	0.4V/m/s (0.01V/in/s)	0.5V/m/s (0.01V/in/s)	0.7V/m/s (0.02V/in/s)	0.6V/m/s (0.02V/in/s)
Resistance 25°C <sup>3</sup>	11.2Ω	16.8Ω	22.4Ω	11.2Ω
Inductance <sup>3</sup>	0.5mH	0.7mH	1.0mH	0.5mH
Electric Time Constant	0.045ms	0.042ms	0.044ms	0.045ms
Fundamental Motor Constant ( $K_m$ )	0.31N√W	0.39N√W	0.44N√W	0.50N√W
Magnetic Pitch (North-North)	18mm (0.71in)			

Is this the proper Linear Shaft Motor for your application? Use our **SMART sizing program** to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, contact Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S040D	S040T	S040Q	S040X
Max Phase Temperature <sup>4</sup>	135°C (275°F)			
Thermal Resistance (Coil) ( $K_q$ )	125.3°C/W (258°F/W)	83.5°C/W (183°F/W)	62.6°C/W (145°F/W)	31.3°C/W (72.5°F/W)

<sup>4</sup>The standard temperature difference between the coil and the forcer surface is 10°C.

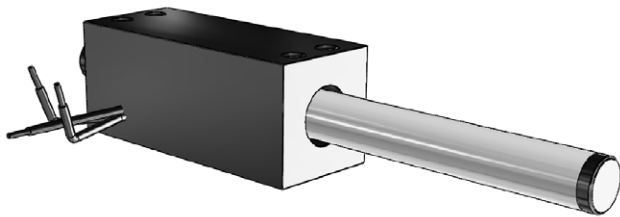

## Bus Voltage

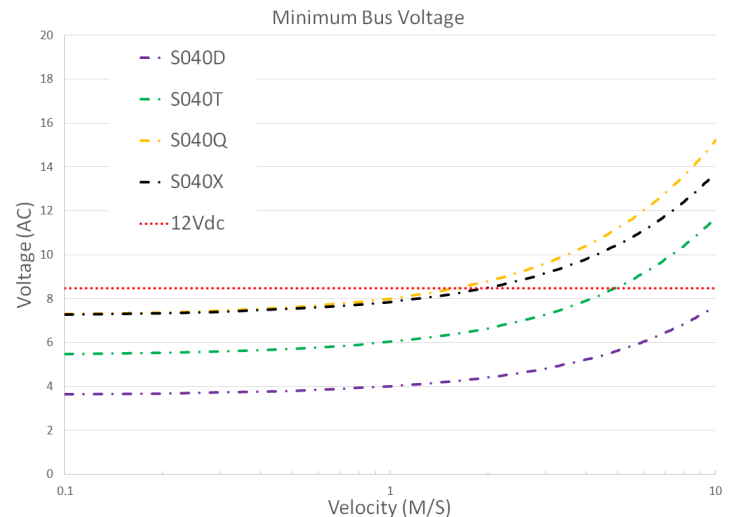

## Part Numbering System

S — Shaft Size 040 — Forcer Size (A) X — Parallel Option XX — Usable Stroke (S) XXXst — Options XX

D: Double (2) windings      Blank: Standard      20, 30, 40      Blank: Standard  
T: Triple (3) windings      PL: Parallel      Motors      FO: Forcer Only  
Q: Quadruple (4) windings

Sold & Serviced By:  
**ELECTROMATE**

Toll-Free Phone (877) SERV098  
 COM Fax (877) SERV099  
[www.elect-omate.com](http://www.elect-omate.com)  
 sales@electomate.com


Forcer Specs	S040D	S040T	S040Q	S040X
Forcer Length (A)	25mm (0.98in)	34mm (1.34in)	43mm (1.69in)	79mm (3.1in)
Forcer Width	10mm (0.39in)			
Forcer Screw Pitch (P)	21.5mm (0.85in)	30.5mm (1.20in)	39.5mm (1.56in)	75.5mm (2.97in)
Forcer Weight	9g (0.02lb)	11g (0.02lb)	14g (0.03lb)	35g (1.23oz)
Gap	0.50mm (0.02in)			

Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

*Unless otherwise specified, dimensions are in mm*

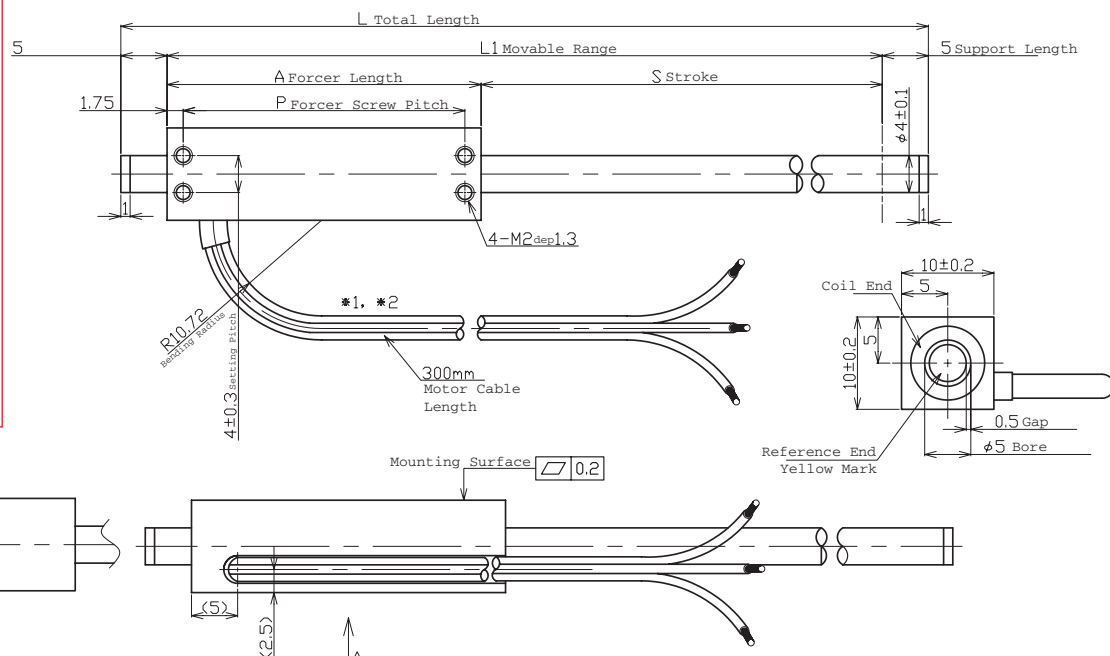

Note: Cable length 300mm.  
The bending radius of the motor cable should be 10.72 mm (wire diameter 1.34 \* 8) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Shaft Length (L)

Stroke	S040D	S040T	S040Q	S040X
20	55mm (2.2in)	64mm (2.5in)	73mm (2.9in)	109mm (4.3in)
30	65mm (2.6in)	74mm (2.9in)	83mm (3.3in)	119mm (4.7in)
40	75mm (3.0in)	84mm (3.3in)	93mm (3.7in)	129mm (5.1in)

Shaft Diameter - 4mm ±0.1  
Additional stroke lengths are available (up to 250mm for S040D, and up to 200mm for S040T, S040Q, S040X). Contact Nippon Pulse for more information.

### Shaft Mass

Stroke	S040D	S040T	S040Q	S040X
20	5.5g (0.19oz)	6.4g (0.23oz)	7.3g (0.26oz)	10.9g (0.38oz)
30	6.5g (0.23oz)	7.4g (0.26oz)	8.3g (0.29oz)	11.9g (0.42oz)
40	7.5g (0.26oz)	8.4g (0.3oz)	9.3g (0.33oz)	12.9g (0.46oz)

### Forcer Spacing Distance

Spec	S040T	S040Q
Forcer Spacing Distance	2mm	
Pole (N/S) Distance	9mm	
Forcer Length	34mm	43mm
Flip Forcers	No	Yes

Tandem S040D forcers are possible, but are equivalent to one (1) S040Q forcer and thus are not listed.

### Support and Bending

Stroke	Support Length (L2)	Max. Bending
All	5mm	0mm

### Connector (Motor Cable)

Receptacle Housing	XMR-03V
Plug Housing	XMP-03V
Retainer	XMS-03V
Pin Contact	SXM-001T-P0.6
Socket Contact	SXA-001T-P0.6


To be installed by the user.

### Lead Wire

Wire Type	UL 1430
Wire AWG	28
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 10.72mm as suggested by the wire manufacturer.

### Tandem Forcer



Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
**ELECTROMATE**  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)



Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

	S080D		S080T		S080Q		
Electrical Specs	S080D	S080D 1S	S080T	S080T 1S	S080Q	S080Q 2S	S080Q 1S
Continuous Force <sup>1</sup>	1.8N (0.4lbs)		2.7N (0.61lbs)		3.5N (0.79lbs)		
Continuous Current <sup>1</sup>	0.84Arms	1.7Arms	0.84Arms	2.5Arms	0.84Arms	1.7Arms	3.4Arms
Acceleration Force <sup>2</sup>	7.2N (1.6lbs)		11N (2.4lbs)		14N (3.1lbs)		
Acceleration Current <sup>2</sup>	3.4Arms	6.7Arms	3.4Arms	10Arms	3.4Arms	6.7Arms	13Arms
Force Constant (K <sub>f</sub> )	2.1N/Arms (0.48lbs/amp)	1.1N/Arms (0.25lbs/amp)	3.2N/Arms (0.72lbs/amp)	1.1N/Arms (0.25lbs/amp)	4.2N/Arms (0.94lbs/amp)	2.1N/Arms (0.47lbs/amp)	1.0N/Arms (0.22lbs/amp)
Back EMF (K <sub>e</sub> )	0.71V/m/s (0.02V/in/s)	0.36V/m/s (0.01V/in/s)	1.1V/m/s (0.03V/in/s)	0.36V/m/s (0.01V/in/s)	1.4V/m/s (0.04V/in/s)	0.70V/m/s (0.02V/in/s)	0.35V/m/s (0.01V/in/s)
Resistance 25°C, <sup>3</sup>	4.7Ω	1.2Ω	6.8Ω	0.76Ω	9.0Ω	2.3Ω	0.56Ω
Inductance <sup>3</sup>	0.7mH	0.18mH	1.0mH	0.11mH	1.3mH	0.33mH	0.081mH
Electric Time Constant	0.149ms		0.147ms		0.144ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	0.98N√W		1.23N√W		1.39N√W		
Magnetic Pitch (North-North)	30mm (1.18in)						

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S080D	S080T	S080Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>q</sub> )	33.2°C/W (92°F/W)	22.9°C/W (73°F/W)	17.3°C/W (63°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 10°C.

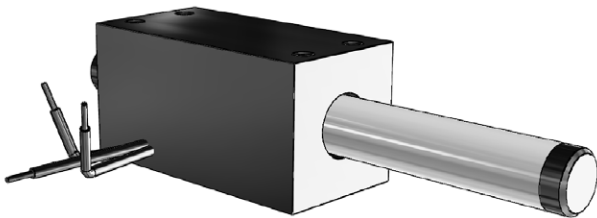

### Bus Voltage

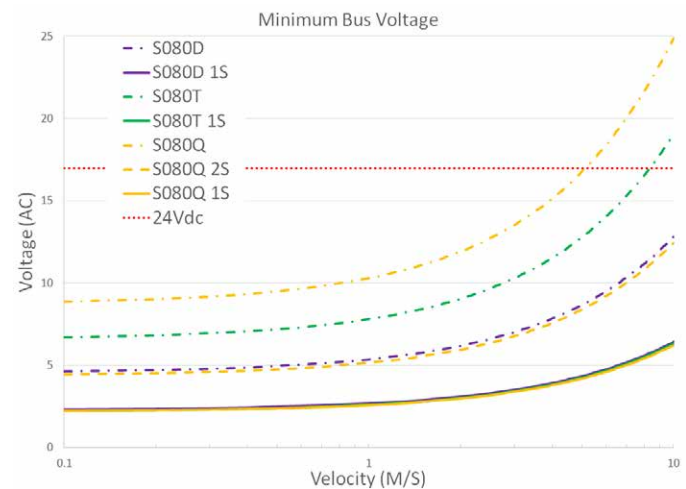

### Part Numbering System

S	—	Shaft Size 080	—	Forcer Size (A) <u>X</u>	—	Parallel Option <u>XX</u>	—	Usable Stroke (S) <u>XXXst</u>	—	Options <u>XX</u>	—	Options <u>XX</u>
				D: Double (2) windings T: Triple (3) windings Q: Quadruple (4) windings		Blank: Single Motor PL: Parallel Motors		25-300mm		Blank: Standard WP: Water Resistant HA: Digital Hall Effect CE: CE type motor FG: Frame Ground		Blank: Standard FO: Forcer Only SO: Shaft Only


Forcer Specs	S080D	S080T	S080Q
Forcer Length (A)	40mm (1.57in)	55mm (2.17in)	70mm (2.76in)
Forcer Width	20mm (0.79in)		
Forcer Screw Pitch (P)	34mm (1.34in)	49mm (1.93in)	64mm (2.52in)
Forcer Weight	0.05kg (0.11lbs)	0.06kg (0.13lbs)	0.08kg (0.18lbs)
Gap	0.50mm (0.02lbs)		

Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

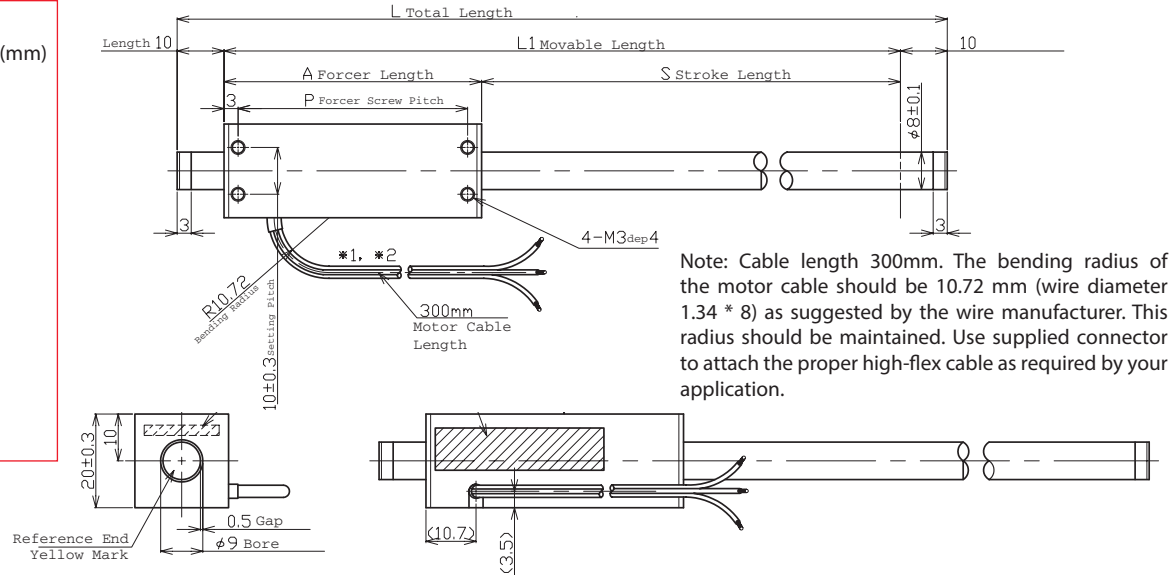

Note: Cable length 300mm. The bending radius of the motor cable should be 10.72 mm (wire diameter 1.34 \* 8) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Hall Effect Specs

**Forcer Length (A)**

**Forcer Screw Pitch (P)** 0.39

**Forcer Screw Pitch** 10

1.10  
28

0.79  
20

#### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red
No Connection	Gray/Black

The bending radius of the sensor cable should be R10.72 mm (wire diameter 1.38 \* 8) as suggested by the wire manufacturer. This radius should be maintained.

### FG Type Motor Cable

The diagram shows the FG Type Motor Cable with the following dimensions and labels:

- 20±0.3**: Cable width.
- 10**: Distance from the left end to the start of the cable.
- Serial number**: Mark on the cable.
- Rating plate**: Mark on the cable.
- Mounting surface**: Surface for mounting.
- 0.2**: Surface finish.
- 20±0.3**: Cable width.
- 10**: Distance from the left end to the start of the cable.
- Standard side (Yellow paint mark)**: Mark on the cable.
- 0.5(Gap)**: Gap between the cable and the motor.
- φ9**: Bore diameter of the motor.
- (10.7)**: Distance from the motor end to the cable.
- (3.5)**: Distance from the motor end to the cable.
- Frame ground**: Ground connection point.
- Signage of Frame ground**: Mark on the cable.

Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

## Shaft Length (L)

Stroke	S080D	S080T	S080Q
25	85mm (3.3in)	100mm (3.9in)	115mm (4.5in)
50	110mm (4.3in)	125mm (4.9in)	140mm (5.5in)
100	160mm (6.3in)	175mm (6.9in)	190mm (7.5in)
150	210mm (8.3in)	225mm (8.9in)	240mm (9.4in)
200	260mm (10.2in)	275mm (10.8in)	290mm (11.4in)

Shaft Diameter (D) - 8mm ±0.1

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)x2)

Additional stroke lengths are available (up to 230mm for S080D and up to 215mm for S080T). Contact Nippon Pulse for more information.

## Shaft Mass

Stroke	S080D	S080T	S080Q
25	0.02kg (0.05lb)	0.03kg (0.06lb)	0.03kg (0.07lb)
50	0.03kg (0.07lb)	0.04kg (0.08lb)	0.04kg (0.09lb)
100	0.05kg (0.11lb)	0.05kg (0.12lb)	0.06kg (0.13lb)
150	0.07kg (0.15lb)	0.07kg (0.16lb)	0.08kg (0.17lb)
200	0.08kg (0.19lb)	0.09kg (0.2lb)	0.1kg (0.21lb)

## Forcer Spacing Distance

Spec	S080T	S080Q
Forcer Spacing Distance	5mm	
Pole (N/S) Distance	15mm	
Forcer Length	55mm	70mm
Flip Forcers	No	Yes

Tandem S080D forcers are possible, but are equivalent to one (1) S080Q forcer and thus are not listed above.

## Tandem Forcer



Forcer Spacing Distance

## Support and Bending

Stroke	Support Length (L2)	Max. Bending
All	10mm	0.05mm

## Connector (Motor Cable)

Receptacle Housing	XMR-03V
Plug Housing	XMP-03V
Retainer	XMS-03V
Pin Contact	SXM-001T-P0.6
Socket Contact	SXA-001T-P0.6

To be installed by the user.

## Standard Lead Wire

Wire Type	UL 1430
Wire AWG	28
U Phase	Red
V Phase	White
W Phase	Black


300mm lead wire bare leads. The bending radius of the motor cable should be 10.72 mm as suggested by the wire manufacturer.

## CE Type Lead Wire Option

Ground Wire	<b>CE</b>
Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse  **ELECTROMATE** to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:

**ELECTROMATE**  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

	S120D		S120T		S120Q		
Electrical Specs	S120D	S120D 1S	S120T	S120T 1S	S120Q	S120Q 2S	S120Q 1S
Continuous Force <sup>1</sup>	4.5N (1.01lbs)		6.6N (1.48lbs)		8.9N (2.0lbs)		
Continuous Current <sup>1</sup>	0.4Arms	0.8Arms	0.4Arms	1.2Arms	0.4Arms	0.8Arms	1.6Arms
Acceleration Force <sup>2</sup>	18N (4.0lbs)		27N (6.07lbs)		36N (8.1lbs)		
Acceleration Current <sup>2</sup>	1.6Arms	3.2Arms	1.6Arms	4.8Arms	1.6Arms	3.2Arms	6.4Arms
Force Constant (K <sub>f</sub> )	11N/Arms (2.5lbs/amp)	5.6N/Arms (1.27lbs/amp)	17N/Arms (3.72lbs/amp)	5.5N/Arms (1.20lbs/amp)	22N/Arms (5.0lbs/amp)	11N/Arms (2.5lbs/amp)	5.6N/Arms (1.27lbs/amp)
Back EMF (K <sub>b</sub> )	3.7V/m/s (0.09V/in/s)	1.9V/m/s (0.05V/in/s)	5.5V/m/s (0.14V/in/s)	1.8V/m/s (0.045V/in/s)	7.4V/m/s (0.19V/in/s)	3.7V/m/s (0.095V/in/s)	1.9V/m/s (0.049V/in/s)
Resistance 25°C <sup>3</sup>	37Ω	9.3Ω	54Ω	6Ω	73Ω	18Ω	4.6Ω
Inductance <sup>3</sup>	12mH	3mH	18mH	2mH	24mH	6mH	1.5mH
Electric Time Constant	0.32ms				0.33ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	1.85N√W		2.25N√W		2.60N√W		
Magnetic Pitch (North-North)	48mm (1.89in)						

Is this the proper Linear Shaft Motor for your application? Use our **SMART sizing program** to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S120D	S120T	S120Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>q</sub> )	18.6°C/W (65°F/W)	12.7°C/W (55°F/W)	9.4°C/W (49°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 10°C.

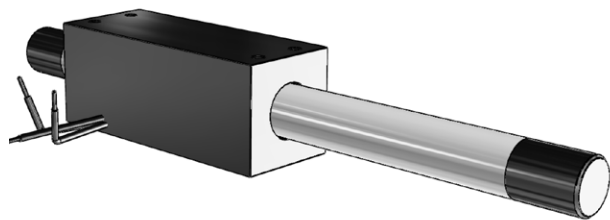

### Bus Voltage

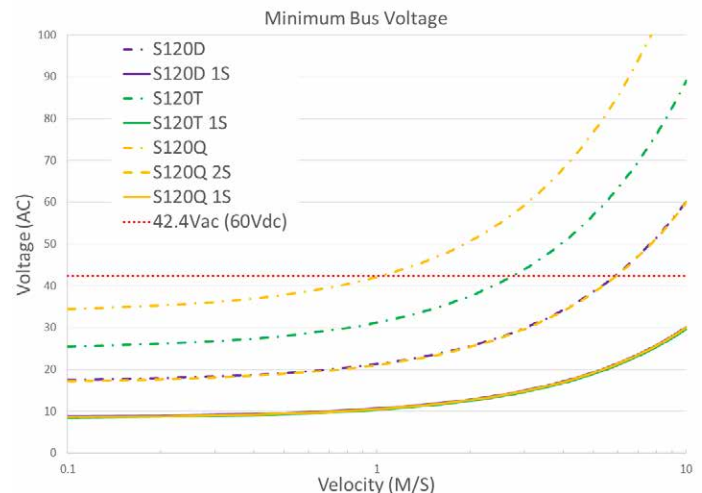


### Part Numbering System

S — Shaft Size 120 — Forcer Size (A) X — Parallel Option XX — Usable Stroke (S) XXXXst — Options XX — Options XX

D: Double (2) windings    Blank: Single Motor    50-1500mm    Blank: Standard    Blank: Standard  
T: Triple (3) windings    PL: Parallel Motors       WP: Water Resistant    FO: Forcer Only  
Q: Quadruple (4) windings             HA: Digital Hall Effect    SO: Shaft Only  
CE: CE type motor    FG: Frame Ground

Forcer Specs	S120D	S120T	S120Q
Forcer Length (A)	64mm (2.52in)	88mm (3.46in)	112mm (4.41in)
Forcer Width	25mm (0.98in)		
Forcer Screw Pitch (P)	56mm (2.20in)	80mm (3.15in)	104mm (4.09in)
Forcer Weight	0.09kg (0.20lbs)	0.12kg (0.26lbs)	0.16kg (0.35lbs)
Gap	0.50mm (0.02in)		

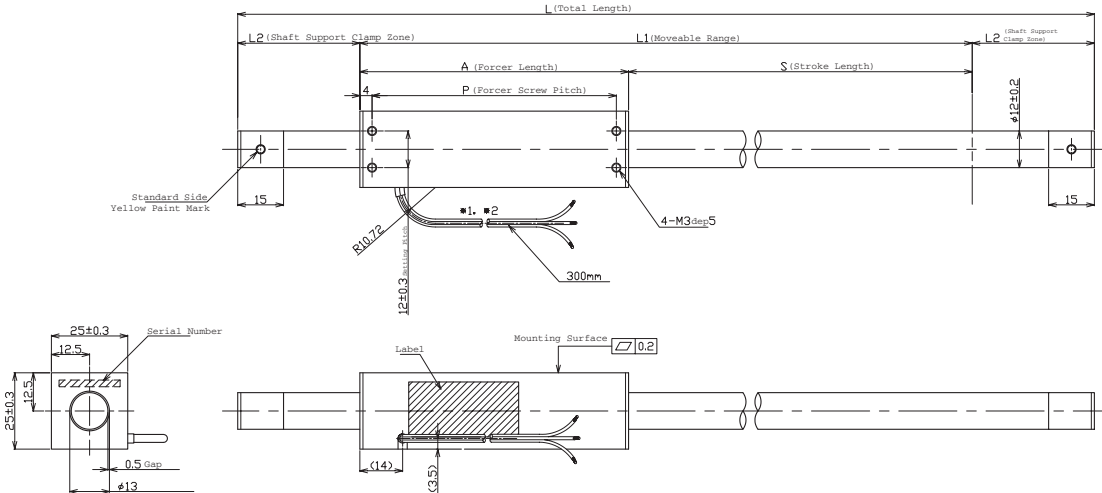

Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

Note: Cable length 300mm. The bending radius of the motor cable should be 10.72 mm (wire diameter 1.34 \* 8) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Hall Effect Specs

Note: The bending radius of the motor cable should be R10.72mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red
No Connection	Gray/Black

The bending radius of the sensor cable should be R27.6 mm (wire diameter 1.38 \* 8) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high-flex cable as required by your application.

### FG Type Motor Cable

Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

## Shaft Length (L)

Stroke	S120D	S120T	S120Q
50	164mm (6.5in)	188mm (7.4in)	212mm (8.3in)
100	214mm (8.4in)	238mm (9.4in)	262mm (10.3in)
150	264mm (10.4in)	288mm (11.3in)	312mm (12.3in)
200	314mm (12.4in)	338mm (13.3in)	362mm (14.3in)
250	364mm (14.3in)	388mm (15.3in)	412mm (16.2in)
300	414mm (16.3in)	438mm (17.2in)	462mm (18.2in)
350	464mm (18.3in)	488mm (19.2in)	512mm (20.2in)
400	544mm (21.4in)	568mm (22.4in)	592mm (23.3in)
450	594mm (23.4in)	618mm (24.3in)	642mm (25.3in)
500	644mm (25.4in)	668mm (26.3in)	692mm (27.2in)
550	694mm (27.3in)	718mm (28.3in)	742mm (29.2in)
600	744mm (29.3in)	768mm (30.2in)	792mm (31.2in)
650	794mm (31.3in)	818mm (32.2in)	842mm (33.1in)
700	844mm (33.2in)	868mm (34.2in)	892mm (35.1in)
750	894mm (35.2in)	918mm (36.1in)	942mm (37.1in)
800	944mm (37.2in)	968mm (38.1in)	992mm (39.1in)
850	1034mm (40.7in)	1058mm (41.7in)	1082mm (42.6in)
900	1084mm (42.7in)	1108mm (43.6in)	1132mm (44.6in)
950	1134mm (44.6in)	1158mm (45.6in)	1182mm (46.5in)
1000	1184mm (46.6in)	1208mm (47.6in)	1232mm (48.5in)
1050	1234mm (48.6in)	1258mm (49.5in)	1282mm (50.5in)

Additional stroke lengths are available (up to 1540mm for S120D, up to 1510mm for S120T, and up to 1490mm for S120Q). Contact Nippon Pulse for more information.

## Shaft Mass

Stroke	S120D	S120T	S120Q
50	0.1kg (0.2lb)	0.1kg (0.3lb)	0.1kg (0.3lb)
100	0.1kg (0.3lb)	0.2kg (0.4lb)	0.2kg (0.4lb)
150	0.2kg (0.4lb)	0.2kg (0.5lb)	0.2kg (0.5lb)
200	0.2kg (0.5lb)	0.2kg (0.5lb)	0.3kg (0.6lb)
250	0.3kg (0.6lb)	0.3kg (0.6lb)	0.3kg (0.7lb)
300	0.3kg (0.7lb)	0.3kg (0.7lb)	0.3kg (0.8lb)
350	0.3kg (0.8lb)	0.4kg (0.8lb)	0.4kg (0.8lb)
400	0.4kg (0.9lb)	0.4kg (0.9lb)	0.4kg (1lb)
450	0.4kg (1lb)	0.5kg (1lb)	0.5kg (1lb)
500	0.5kg (1lb)	0.5kg (1.1lb)	0.5kg (1.1lb)
550	0.5kg (1.1lb)	0.5kg (1.2lb)	0.6kg (1.2lb)
600	0.6kg (1.2lb)	0.6kg (1.3lb)	0.6kg (1.3lb)
650	0.6kg (1.3lb)	0.6kg (1.3lb)	0.6kg (1.4lb)
700	0.6kg (1.4lb)	0.7kg (1.4lb)	0.7kg (1.5lb)
750	0.7kg (1.5lb)	0.7kg (1.5lb)	0.7kg (1.6lb)
800	0.7kg (1.6lb)	0.7kg (1.6lb)	0.7kg (1.7lb)
850	0.8kg (1.7lb)	0.8kg (1.7lb)	0.8kg (1.8lb)
900	0.8kg (1.8lb)	0.8kg (1.8lb)	0.8kg (1.9lb)
950	0.8kg (1.9lb)	0.9kg (1.9lb)	0.9kg (1.9lb)
1000	0.9kg (1.9lb)	0.9kg (2lb)	0.9kg (2lb)
1050	0.9kg (2lb)	0.9kg (2.1lb)	1kg (2.1lb)

## Forcer Spacing Distance

Spec	S120T	S120Q
Forcer Spacing Distance	8mm	
Pole (N/S) Distance	24mm	
Forcer Length	88mm	112mm
Flip Forcers	No	Yes

Tandem S120D forcers are possible, but are equivalent to one (1) S120Q forcer and thus are not listed above.

## Connector (Motor Cable)

Receptacle Housing	XMR-03V
Plug Housing	XMP-03V
Retainer	XMS-03V
Pin Contact	SXM-001T-P0.6
Socket Contact	SXA-001T-P0.6

To be installed by the user.

## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~350	25mm	0.00mm
351~800	40mm	0.30mm
801~max.	60mm	0.50mm

Shaft Diameter (D) - 12mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)x2)

## Tandem Forcer



## Standard Lead Wire

Wire Type	UL 1430
Wire AWG	28
U Phase	Red
V Phase	White
W Phase	Black


300mm lead wire bare leads. The bending radius of the motor cable should be 10.72 mm as suggested by the wire manufacturer.

## CE Type Lead Wire Option

Ground Wire	CE
Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse  **ELECTROMATE** to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
 **ELECTROMATE**  
 Toll Free Phone (877) SERV098  
 Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	S160D		S160T		S160Q		
	S160D	S160D 1S	S160T	S160T 1S	S160Q	S160Q 2S	S160Q 1S
Continuous Force <sup>1</sup>	10N (2.25lbs)		15N (3.37lbs)		20N (4.5lbs)		
Continuous Current <sup>1</sup>	0.62Arms	1.2Arms	0.62Arms	1.9Arms	0.62Arms	1.2Arms	2.5Arms
Acceleration Force <sup>2</sup>	40N (9.0lbs)		60N (13.5lbs)		81N (17.78lbs)		
Acceleration Current <sup>2</sup>	2.5Arms	5Arms	2.5Arms	7.4Arms	2.5Arms	5Arms	9.9Arms
Force Constant (K <sub>f</sub> )	16N/Arms (3.71lbs/amp)	8.1N/Arms (1.88lbs/amp)	24N/Arms (5.43lbs/amp)	8.1N/Arms (1.83lbs/amp)	33N/Arms (7.31lbs/amp)	16N/Arms (3.54lbs/amp)	8.1N/Arms (1.79lbs/amp)
Back EMF (K <sub>e</sub> )	5.4V/m/s (0.14V/in/s)	2.7V/m/s (0.07V/in/s)	8.1V/m/s (0.2V/in/s)	2.7V/m/s (0.067V/in/s)	11V/m/s (0.28V/in/s)	5.4V/m/s (0.14V/in/s)	2.7V/m/s (0.069V/in/s)
Resistance 25°C <sup>3</sup>	21Ω	5.3Ω	33Ω	3.7Ω	43Ω	11Ω	2.7Ω
Inductance <sup>3</sup>	8.2mH	2.1mH	12mH	1.3mH	16mH	4mH	1mH
Electric Time Constant	0.39ms		0.36ms		0.37ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	3.52N√W		4.21N√W		4.92N√W		
Magnetic Pitch (North-North)	60mm (2.36in)						

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S160D	S160T	S160Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>q</sub> )	13.6°C/W (56°F/W)	8.7°C/W (48°F/W)	6.7°C/W (44°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 15°C.

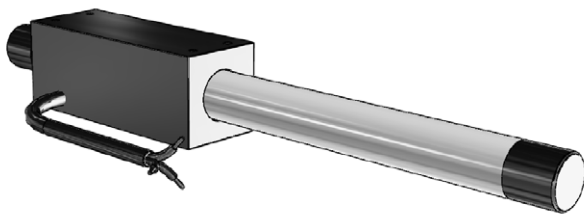

### Bus Voltage

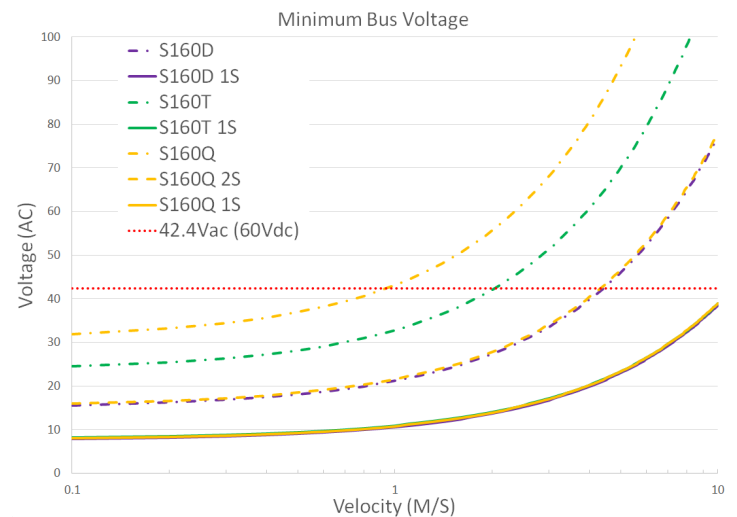


### Part Numbering System

S — Shaft Size 160 — Forcer Size (A) X — Parallel Option XX — Usable Stroke (S) XXXXst — Options XX — Options XX

D: Double (2) windings    Blank: Single Motor    100-1800mm    Blank: Standard    Blank: Standard  
T: Triple (3) windings    PL: Parallel Motors       WP: Water Resistant    FO: Forcer Only  
Q: Quadruple (4) windings             HA: Digital Hall Effect    SO: Shaft Only  
CE: CE type motor  
FG: Frame Ground

Forcer Specs	S160D	S160T	S160Q
Forcer Length (A)	80mm (3.15in)	110mm (4.33in)	140mm (5.51in)
Forcer Width	30mm ±0.3 (1.18in)		
Forcer Screw Pitch (P)	70mm (2.76in)	100mm (3.94in)	130mm (5.12in)
Forcer Weight	0.15kg (0.33lbs)	0.20kg (0.44lbs)	0.30kg (0.66lbs)
Gap	0.50mm (0.02in)		

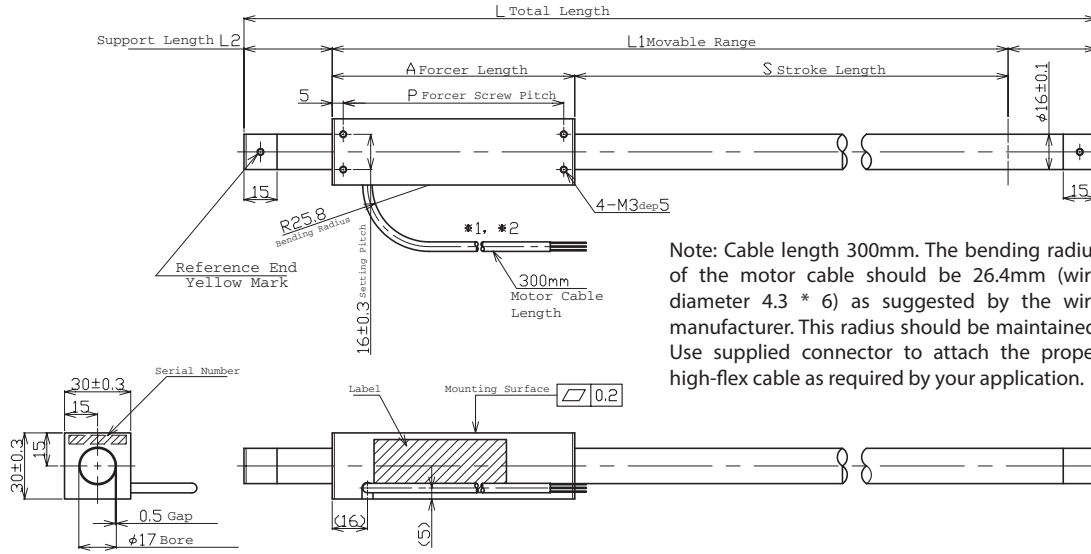

Note: Cable length 300mm. The bending radius of the motor cable should be 26.4mm (wire diameter 4.3 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.


Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

### Hall Effect Specs

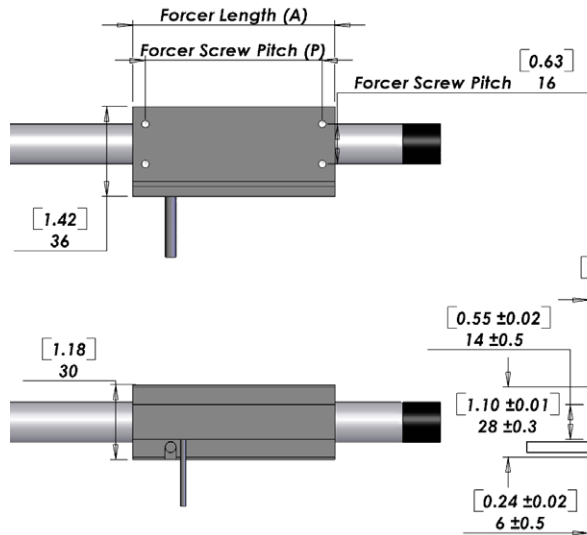


Note: The bending radius of the motor cable should be R 26.4mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Sensor Cable Specs


Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R 27.6mm (wire diameter 4.4 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high flex cable as required by your application.

### FG Type Motor Cable

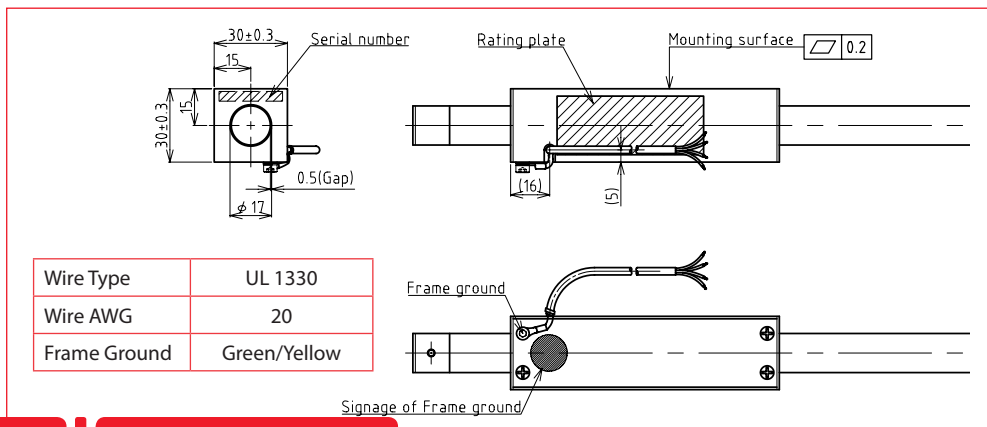

Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

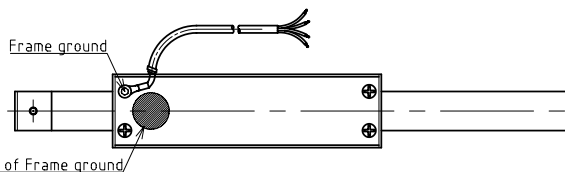



## Shaft Length (L)

Stroke	S160D	S160T	S160Q
100	230mm (9.1in)	260mm (10.2in)	290mm (11.4in)
150	280mm (11.0in)	310mm (12.2in)	340mm (13.4in)
200	330mm (13.0in)	360mm (14.2in)	390mm (15.4in)
250	380mm (15.0in)	410mm (16.1in)	440mm (17.3in)
300	430mm (16.9in)	460mm (18.1in)	490mm (19.3in)
350	480mm (18.9in)	510mm (20.1in)	540mm (21.3in)
400	560mm (22.1in)	590mm (23.2in)	620mm (24.4in)
450	610mm (24.0in)	640mm (25.2in)	670mm (26.4in)
500	660mm (26.0in)	690mm (27.2in)	720mm (28.4in)
550	710mm (28.0in)	740mm (29.1in)	770mm (30.3in)
600	760mm (29.9in)	790mm (31.1in)	820mm (32.3in)
650	810mm (31.9in)	840mm (33.1in)	870mm (34.3in)
700	860mm (33.9in)	890mm (35.0in)	920mm (36.2in)
750	910mm (35.8in)	940mm (37.0in)	970mm (38.2in)
800	960mm (37.8in)	990mm (39.0in)	1020mm (40.2in)
850	1050mm (41.3in)	1080mm (42.5in)	1110mm (43.7in)
900	1100mm (43.3in)	1130mm (44.5in)	1160mm (45.7in)
950	1150mm (45.3in)	1180mm (46.5in)	1210mm (47.6in)
1000	1200mm (47.2in)	1230mm (48.4in)	1260mm (49.6in)
1050	1250mm (49.2in)	1280mm (50.4in)	1310mm (51.6in)

Shaft Diameter (D) - 16mm ±0.1

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)×2)

Additional stroke lengths are available. For longer strokes, see the datasheet for L160 Linear Shaft Motor. Contact Nippon Pulse for more information.

## Shaft Mass

Stroke	S160D	S160T	S160Q
100	0.28kg (0.63lb)	0.33kg (0.72lb)	0.37kg (0.81lb)
150	0.35kg (0.78lb)	0.4kg (0.87lb)	0.44kg (1lb)
200	0.42kg (0.94lb)	0.47kg (1lb)	0.51kg (1.1lb)
250	0.49kg (1.1lb)	0.54kg (1.2lb)	0.58kg (1.3lb)
300	0.56kg (1.2lb)	0.61kg (1.3lb)	0.65kg (1.4lb)
350	0.64kg (1.4lb)	0.68kg (1.5lb)	0.72kg (1.6lb)
400	0.72kg (1.6lb)	0.77kg (1.7lb)	0.81kg (1.8lb)
450	0.79kg (1.8lb)	0.84kg (1.8lb)	0.88kg (1.9lb)
500	0.86kg (1.9lb)	0.91kg (2lb)	0.95kg (2.1lb)
550	0.93kg (2.1lb)	1kg (2.2lb)	1kg (2.2lb)
600	1kg (2.2lb)	1kg (2.3lb)	1.1kg (2.4lb)
650	1.1kg (2.4lb)	1.1kg (2.5lb)	1.2kg (2.6lb)
700	1.1kg (2.5lb)	1.2kg (2.6lb)	1.2kg (2.7lb)
750	1.2kg (2.7lb)	1.3kg (2.8lb)	1.3kg (2.9lb)
800	1.3kg (2.8lb)	1.3kg (2.9lb)	1.4kg (3lb)
850	1.4kg (3lb)	1.4kg (3.1lb)	1.5kg (3.2lb)
900	1.5kg (3.2lb)	1.5kg (3.3lb)	1.5kg (3.4lb)
950	1.5kg (3.4lb)	1.6kg (3.4lb)	1.6kg (3.5lb)
1000	1.6kg (3.5lb)	1.6kg (3.6lb)	1.7kg (3.7lb)
1050	1.7kg (3.7lb)	1.7kg (3.8lb)	1.7kg (3.9lb)

## Connector (Motor Cable)

Receptacle Housing	XMR-03V
Plug Housing	XMP-03V
Retainer	XMS-03V
Pin Contact	SXM-001T-P0.6
Socket Contact	SXA-001T-P0.6

To be installed by the user.

## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~350	25mm	0.00mm
351~500	40mm	0.30mm
501~800	40mm	0.50mm
801~max	60mm	0.50mm

## Forcer Spacing Distance

Spec	S160T	S160Q
Forcer Spacing Distance	10mm	
Pole (N/S) Distance	30mm	
Forcer Length	110mm	140mm
Flip Forcers	No	Yes

Tandem S160D forcers are possible, but are equivalent to one (1) S160Q forcer and thus are not listed above.

## Standard Lead Wire

Wire Type	UL 2464FA
Wire AWG	25
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 26.4mm as suggested by the wire manufacturer.

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

## CE Type Lead Wire Option


Ground Wire	CE
Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).

## Tandem Forcer



Forcer Spacing Distance

For assistance in selecting the best motor for your application, contact Nippon Pulse  **ELECTROMATE**

to speak with an applications engineer. 1-540-633-1677

Your Partner In Motion Control [www.nipponpulse.com](http://www.nipponpulse.com)

**NIPPONPULSE.COM** 

Sold & Serviced By:  
Toll Free Phone (977) SERV098  
Fax (41) SERV099  
www.electromate.com  
sales@electromate.com



## Shaft Length (mm)


Stroke	L160D	L160T	L160Q
100	230	260	290
150	280	310	340
200	330	360	390
250	380	410	440
300	430	460	490
350	480	510	540
400	560	590	620
450	610	640	670
500	660	690	720
550	710	740	770
600	760	790	820
650	810	840	870
700	860	890	920
750	910	940	970
800	960	990	1020
850	1050	1080	1110
900	1100	1130	1160
950	1150	1180	1210
1000	1200	1230	1260
1050	1250	1280	1310
1100	1300	1330	1360
1150	1350	1380	1410
1200	1400	1430	1460
1250	1450	1480	1510
1300	1500	1530	1560
1350	1550	1580	1610
1400	1600	1630	1660
1450	1650	1680	1710
1500	1700	1730	1760
1550	1750	1780	1810
1600	1800	1830	1860
1650	1850	1880	1910
1700	1900	1930	1960
1750	1950	1980	2010
1800	2000	2030	2060

## Shaft Mass (kg)

Stroke	L160D	L160T	L160Q
100	0.28	0.33	0.37
150	0.35	0.4	0.44
200	0.42	0.47	0.51
250	0.49	0.54	0.58
300	0.56	0.61	0.65
350	0.64	0.68	0.72
400	0.72	0.77	0.81
450	0.79	0.84	0.88
500	0.86	0.91	0.95
550	0.93	1	1
600	1	1	1.1
650	1.1	1.1	1.2
700	1.1	1.2	1.2
750	1.2	1.3	1.3
800	1.3	1.3	1.4
850	1.4	1.4	1.5
900	1.5	1.5	1.5
950	1.5	1.6	1.6
1000	1.6	1.6	1.7
1050	1.7	1.7	1.7
1100	1.7	1.8	1.8
1150	1.8	1.9	1.9
1200	1.9	1.9	2
1250	2	2	2
1300	2	2.1	2.1
1350	2.1	2.2	2.2
1400	2.2	2.2	2.3
1450	2.3	2.3	2.3
1500	2.3	2.4	2.4
1550	2.4	2.4	2.5
1600	2.5	2.5	2.6
1650	2.6	2.6	2.6
1700	2.6	2.7	2.7
1750	2.7	2.7	2.8

Shaft Diameter (D) - 16mm ±0.1  
Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)×2)

## Hall Effect Specs

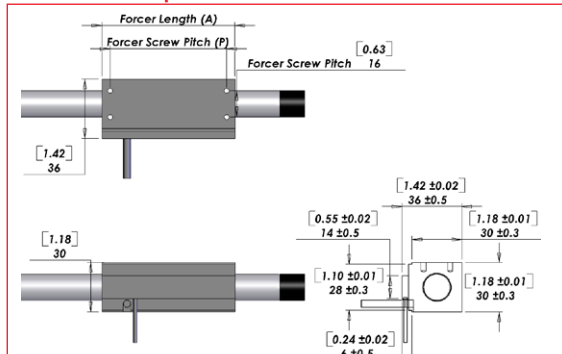

The bending radius of the motor cable should be R27.6mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high flex cable as required by your application.

## Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R 26.4mm (wire diameter 4.4 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high flex cable as required by your application.

## Part Numbering System

Shaft Size (D)	Forcer Size (A)	Parallel Option	Usable Stroke	Options	Options	# of Forcers
L 160	X D: Double (2) windings T: Triple (3) windings Q: Quadruple (4) windings	XX Blank: Single Motor PL: Parallel Motors	XXXXst 100-1800mm	XX Blank: Standard WP: Water Resistant HA: Digital Hall Effect CE: CE type motor	XX Blank: Standard FO: Forcer Only SO: Shaft Only	XX Two or more

# L160

## Linear Shaft Motor

### Lead Wire

Wire Type	UL 2464FA
Wire AWG	25
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads  
The bending radius of the motor cable should be 25.8mm as suggested by the wire manufacturer.

### Connector (Motor Cable)

Receptacle Housing	XMR-03V
Plug Housing	XMP-03V
Retainer	XMS-03V
Pin Contact	SXM-001T-P0.6
Socket Contact	SXA-001T-P0.6

To be installed by the user

### CE Type Motor Cable

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer.

Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

Ground Wire	CE
Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

## Support and Bending

Stroke	Support Length	Max. bending
0~350	25mm	0.00mm
351~500	40mm	0.30mm
501~800	40mm	0.50mm
801~max	60mm	0.50mm

## Tandem Forcer



## Forcer Spacing Distance

Spec	L160T	L160Q
Forcer Spacing Distance	10mm	10mm
Pole (N/S) Distance	30mm	30mm
Forcer Length	110mm	140mm
Flip Forcers	No	Yes

Tandem L160D forcers are possible, but are equivalent to one (1) L160Q forcer and thus are not listed above.

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	S200D		S200T		S200Q		
	S200D	S200D 1S	S200T	S200T 1S	S200Q	S200Q 2S	S200Q 1S
Continuous Force <sup>1</sup>	18N (4.05lbs)		28N (6.29lbs)		38N (8.54lbs)		
Continuous Current <sup>1</sup>	0.59Arms	1.2Arms	0.59 Arms	1.8Arms	0.59Arms	1.2Amps	2.4Amps
Acceleration Force <sup>2</sup>	72N (16.2lbs)		112N (25.2lbs)		152N (34.2lbs)		
Acceleration Current <sup>2</sup>	2.4Arms	4.7Arms	2.4Arms	7.1Arms	2.4Arms	4.7Arms	9.4Arms
Force Constant (K <sub>f</sub> )	31N/Arms (6.86lbs/amp)	15N/Arms (3.32lbs/amp)	47N/Arms (10.67lbs/amp)	16N/Arms (3.63lbs/amp)	64N/Arms (14.48lbs/amp)	32N/Arms (7.24lbs/amp)	16N/Arms (3.62lbs/amp)
Back EMF (K <sub>e</sub> )	10V/m/s (0.26V/in/s)	5.1V/m/s (0.13V/in/s)	16V/m/s (0.4V/in/s)	5.3V/m/s (0.13V/in/s)	21V/m/s (0.55V/in/s)	11V/m/s (0.29V/in/s)	5.4V/m/s (0.14V/in/s)
Resistance 25°C <sup>3</sup>	29Ω	7.2Ω	43Ω	4.8Ω	56Ω	14Ω	3.5Ω
Inductance <sup>3</sup>	19mH	4.8mH	29mH	3.2mH	39mH	10mH	2.4mH
Electric Time Constant	0.67ms				0.70ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	5.70N√W		7.24N√W		8.61N√W		
Magnetic Pitch (North-North)	72mm (2.83in)						

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, contact Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S200D	S200T	S200Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>c</sub> )	11°C/W (52°F/W)	7.3°C/W (45°F/W)	5.6°C/W (42°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 20°C.

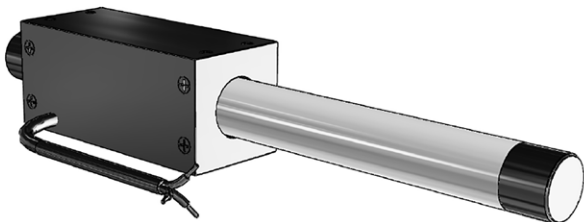

### Bus Voltage

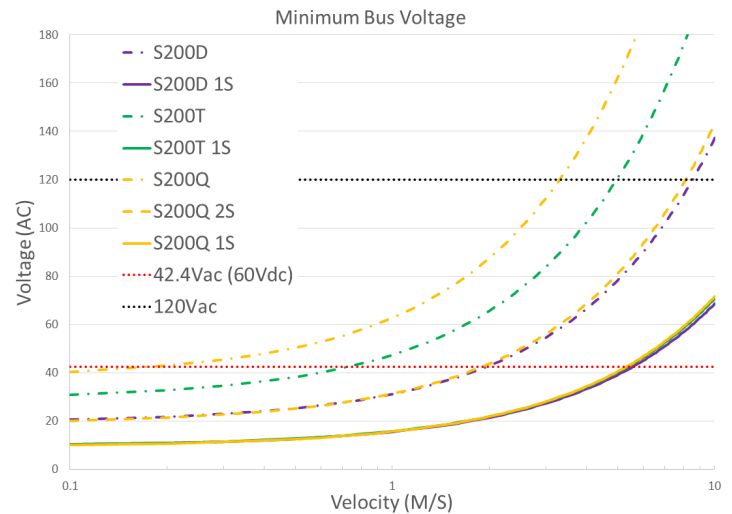


### Part Numbering System

S — Shaft Size 200 — Forcer Size (A) X — Parallel Option XX — Usable Stroke (S) XXXXst — Options XX — Options XX

D: Double (2) windings    Blank: Single Motor    100-2000mm    Blank: Standard    Blank: Standard  
T: Triple (3) windings    PL: Parallel Motors             WP: Water Resistant    FO: Forcer Only  
Q: Quadruple (4) windings                               HA: Digital Hall Effect    SO: Shaft Only  
CE: CE type motor    FG: Frame Ground

Forcer Specs	S200D	S200T	S200Q
Forcer Length (A)	94mm (3.7in)	130mm (5.12in)	166mm (6.54in)
Forcer Width	40mm (1.57in)		
Forcer Screw Pitch (P)	84mm (3.31in)	120mm (4.72in)	156mm (6.14in)
Forcer Weight	0.30kg (0.66lbs)	0.50kg (1.1lbs)	0.70kg (1.54lbs)
Gap	0.75mm (0.03in)		

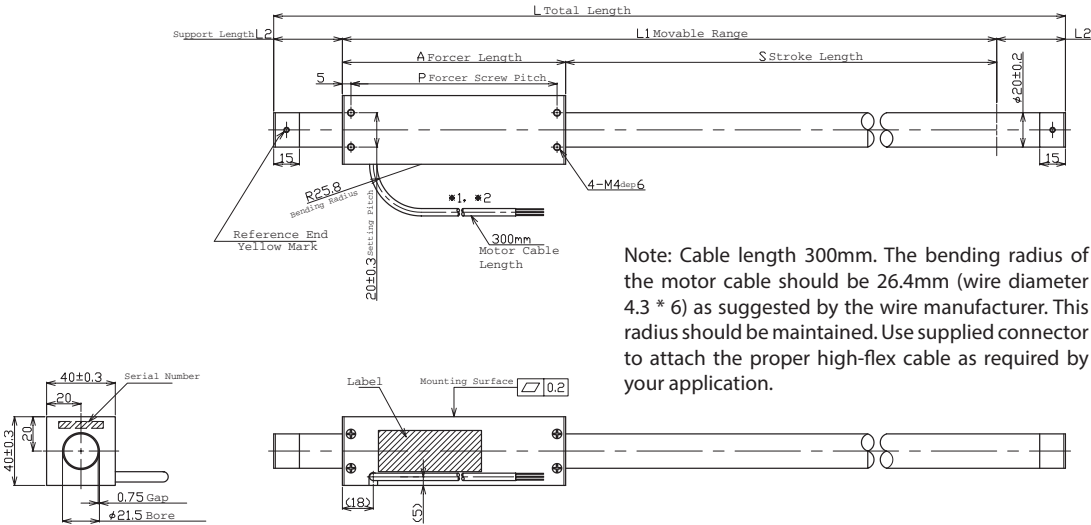

Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

*Unless otherwise specified, dimensions are in mm*

### Hall Effect Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 4.4 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high-flex cable as required by your application.

### FG Type Motor Cable

Wire Type	UL 2464FA
Wire AWG	25
U Phase	Red
V Phase	White
W Phase	Black

Ground Wire	CE
Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 26.4mm as suggested by the wire manufacturer.

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1990).

## Shaft Length (L)

Stroke	S200D	S200T	S200Q
100	244mm (9.6in)	280mm (11in)	316 (12.4in)
150	294mm (11.6in)	330mm (13in)	366mm (14.4in)
200	344mm (13.5in)	380 (15in)	416mm (16.4in)
250	394mm (15.5in)	430mm (16.9in)	466mm (18.3in)
300	444mm (17.5in)	480mm (18.9in)	516mm (20.3in)
350	524mm (20.6in)	560mm (22in)	596mm (23.5in)
400	574mm (22.6in)	610mm (24in)	646mm (25.4in)
450	624mm (24.6in)	660mm (26in)	696mm (27.4in)
500	674mm (26.5in)	710mm (28in)	746mm (29.4in)
550	724mm (28.5in)	760mm (29.9in)	796mm (31.3in)
600	774mm (30.5in)	810mm (31.9in)	846mm (33.3in)
650	824mm (32.4in)	860mm (33.9in)	896mm (35.3in)
700	874mm (34.4in)	910mm (35.8in)	946mm (37.2in)
750	964mm (38in)	1000mm (39.4in)	1036mm (40.8in)
800	1014mm (39.9in)	1050mm (41.3in)	1086mm (42.8in)
850	1064mm (41.9in)	1100mm (43.3in)	1136mm (44.7in)
900	1114mm (43.9in)	1150mm (45.3in)	1186mm (46.7in)
950	1164mm (45.8in)	1200mm (47.2in)	1236mm (48.7in)
1000	1214mm (47.8in)	1250mm (49.2in)	1286mm (50.6in)
1050	1264mm (49.8in)	1300mm (51.2in)	1336mm (52.6in)
1100	1314mm (51.7in)	1350mm (53.1in)	1386mm (54.6in)
1150	1364mm (53.7in)	1400mm (55.1in)	1436mm (56.5in)
1200	1414mm (55.7in)	1450mm (57.1in)	1486mm (58.5in)
1250	1464mm (57.6in)	1500mm (59.1in)	1536mm (60.5in)
1300	1514mm (59.6 in)	1550mm (61in)	1586mm (62.4in)
1350	1564mm (61.6in)	1600mm (63in)	1636mm (64.4in)
1400	1614mm (63.5in)	1650mm (65in)	1686mm (66.4in)
1450	1664mm (65.5in)	1700mm (66.9in)	1736mm (68.3in)
1500	1714mm (67.5in)	1750mm (68.9in)	1786mm (70.3in)
1550	1764mm (69.4in)	1800mm (70.9in)	1836mm (72.3in)

## Shaft Mass

Stroke	S200D	S200T	S200Q
100	0.5kg (1lb)	0.6kg (1.2lb)	0.6kg (1.4lb)
150	0.6kg (1.3lb)	0.7kg (1.5lb)	0.7kg (1.6lb)
200	0.7kg (1.5lb)	0.8kg (1.7lb)	0.9kg (1.9lb)
250	0.8kg (1.8lb)	0.9kg (1.9lb)	1kg (2.1lb)
300	0.9kg (2lb)	1kg (2.2lb)	1.1kg (2.4lb)
350	1.1kg (2.3lb)	1.1kg (2.5lb)	1.2kg (2.7lb)
400	1.2kg (2.6lb)	1.2kg (2.7lb)	1.3kg (2.9lb)
450	1.3kg (2.8lb)	1.4kg (3lb)	1.4kg (3.2lb)
500	1.4kg (3lb)	1.5kg (3.2lb)	1.5kg (3.4lb)
550	1.5kg (3.3lb)	1.6kg (3.5lb)	1.6kg (3.6lb)
600	1.6kg (3.5lb)	1.7kg (3.7lb)	1.8kg (3.9lb)
650	1.7kg (3.8lb)	1.8kg (3.9lb)	1.9kg (4.1lb)
700	1.8kg (4lb)	1.9kg (4.2lb)	2kg (4.4lb)
750	2kg (4.3lb)	2kg (4.5lb)	2.1kg (4.7lb)
800	2.1kg (4.6lb)	2.2kg (4.8lb)	2.2kg (4.9lb)
850	2.2kg (4.8lb)	2.3kg (5lb)	2.3kg (5.2lb)
900	2.3kg (5.1lb)	2.4kg (5.2lb)	2.5kg (5.4lb)
950	2.4kg (5.3lb)	2.5kg (5.5lb)	2.6kg (5.7lb)
1000	2.5kg (5.6lb)	2.6kg (5.7lb)	2.7kg (5.9lb)
1050	2.6kg (5.8lb)	2.7kg (6lb)	2.8kg (6.1lb)
1100	2.7kg (6lb)	2.8kg (6.2lb)	2.9kg (6.4lb)
1150	2.8kg (6.3lb)	2.9kg (6.5lb)	3kg (6.6lb)
1200	3kg (6.5lb)	3kg (6.7lb)	3.1kg (6.9lb)
1250	3.1kg (6.8lb)	3.1kg (6.9lb)	3.2kg (7.1lb)
1300	3.2kg (7lb)	3.3kg (7.2lb)	3.3kg (7.4lb)
1350	3.3kg (7.3lb)	3.4kg (7.4lb)	3.4kg (7.6lb)
1400	3.4kg (7.5lb)	3.5kg (7.7lb)	3.6kg (7.8lb)
1450	3.5kg (7.7lb)	3.6kg (7.9lb)	3.7kg (8.1lb)
1500	3.6kg (8lb)	3.7kg (8.2lb)	3.8kg (8.3lb)
1550	3.7kg (8.2lb)	3.8kg (8.4lb)	3.9kg (8.6lb)

Additional stroke lengths are available (up to 2470mm for S200D, up to 2435mm for S200T, and up to 2390mm for S200Q). Contact Nippon Pulse for more information.

## Forcer Spacing Distance

Spec	S200T	S200Q
Forcer Spacing Distance	14mm	
Pole (N/S) Distance	36mm	
Forcer Length	130mm	166mm
Flip Forcers	No	Yes

Tandem S200D forcers are possible, but are equivalent to one (1) S200Q forcer and thus are not listed above.

## Tandem Forcer



Forcer Spacing Distance

## Connector (Motor Cable)

Receptacle Housing	XMR-03V
Plug Housing	XMP-03V
Retainer	XMS-03V
Pin Contact	SXM-001T-P0.6
Socket Contact	SXA-001T-P0.6

To be installed by the user.

## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~300	25mm	0.00mm
301~700	40mm	0.30mm
701~1000	60mm	0.70mm
1001~max	60mm	0.90mm

Shaft Diameter (D) - 20mm ±0.2


Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)x2)

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
**ELECTROMATE**  
 Toll Free Phone (877) SERV098  
 Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

## THM Option

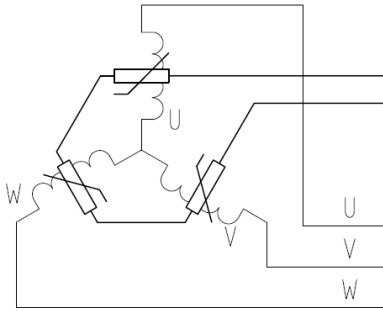


Circuit Diagram

4. Thermistor  
PTCSL20T071DBE(Vishay)

## Thermocouple

Thermal sensor  
Thermocouple K type (marked each phase name)  
Attached to the surface of inside of coil  
Length 3000mm

For assistance in selecting the best motor for your application, contact Nippon Pulse  **ELECTROMATE**  
to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
 **ELECTROMATE**  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	S250D		S250T		S250Q		
	S250D	S250D 1S	S250T	S250T 1S	S250Q	S250Q 2S	S250Q 1S
Continuous Force <sup>1</sup>	40N (9.0lbs)		60N (13.5lbs)	58N (13.0lbs)	75N (16.9lbs)		
Continuous Current <sup>1</sup>	1.3Arms	2.6Arms	1.3Arms	3.8Arms	1.3Arms	2.6Arms	5.1Arms
Acceleration Force <sup>2</sup>	160N (36.0lbs)		240N (54.0lbs)	232N (52.2lbs)	300N (67.4lbs)		
Acceleration Current <sup>2</sup>	5.1Arms	10Arms	5.1Arms	15.2Arms	5.1Arms	10Arms	20Arms
Force Constant (K <sub>f</sub> )	31N/Arms (6.86lbs/amp)	16N/Arms (3.54lbs/amp)	47N/Arms (10.67lbs/amp)	15N/Arms (3.37lbs/amp)	59N/Arms (13.3lbs/amp)	29N/Arms (6.54lbs/amp)	15N/Arms (3.38lbs/amp)
Back EMF (K <sub>e</sub> )	10.4V/m/s	5.2V/m/s	16V/m/s	5.1V/m/s	20V/m/s	10V/m/s	4.9V/m/s
Resistance 25°C <sup>3</sup>	7.8Ω	2Ω	12Ω	1.3Ω	15Ω	3.8Ω	0.94Ω
Inductance <sup>3</sup>	9.8mH	2.5mH	15mH	1.6mH	19mH	4.8mH	1.2mH
Electric Time Constant	1.26ms		1.25ms		1.27ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	11.19N√W		13.53N√W		15.13N√W		
Magnetic Pitch (North-North)	90mm (3.54lbs)						

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision. This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S250D	S250T	S250Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>c</sub> )	8.6°C/W (47.5°F/W)	5.6°C/W (42.1°F/W)	4.5°C/W (40.1°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 20°C.

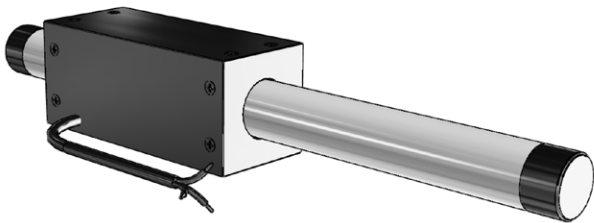

### Bus Voltage

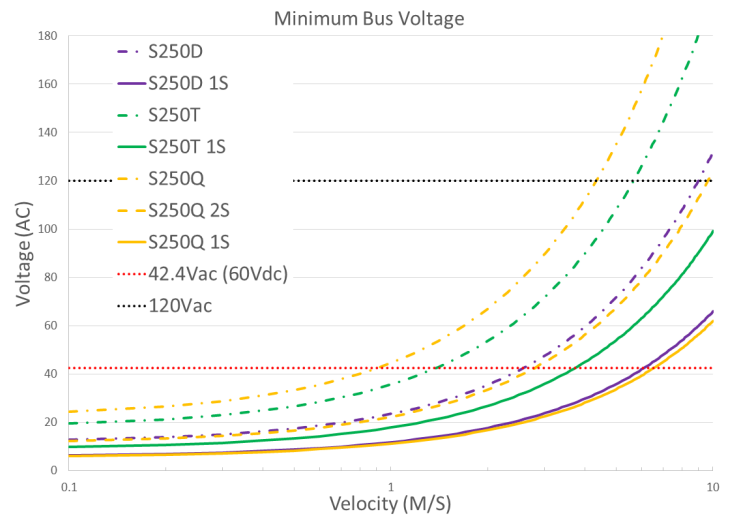

### Part Numbering System

S — Shaft Size 250

— Forcer Size (A) X

— Parallel Option XX

— Usable Stroke (S) XXXXst

— Options XX

— Options XX

D: Double (2) windings  
T: Triple (3) windings  
Q: Quadruple (4) windings  
X: Octuple (8) windings

Blank: Single Motor  
PL: Parallel Motors

100-2000mm

Blank: Standard  
WP: Water Resistant  
HA: Digital Hall Effect  
CE: CE type motor  
FG: Frame Ground

Blank: Standard  
FO: Forcer Only  
SO: Shaft Only




Forcer Specs	S250D	S250T	S250Q
Forcer Length (A)	120mm (4.72in)	165mm (6.5in)	210mm (8.27in)
Forcer Width	50mm (1.97in)		
Forcer Screw Pitch (P)	105mm (4.13in)	150mm (5.91in)	195mm (7.68in)
Forcer Weight	0.80kg (1.76lbs)	1.1kg (2.43lbs)	1.5kg (3.31lbs)
Gap	0.75mm (0.03in)		

Tolerances are as follows:



Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

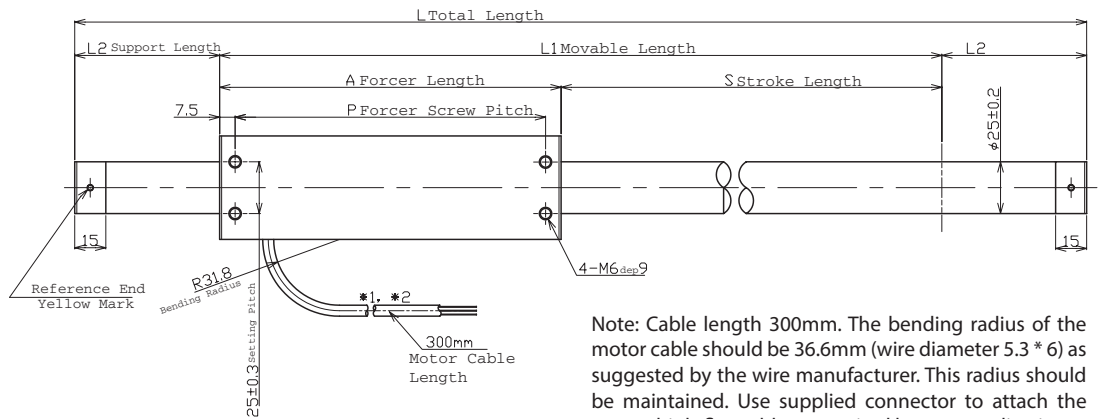

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 5.3 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

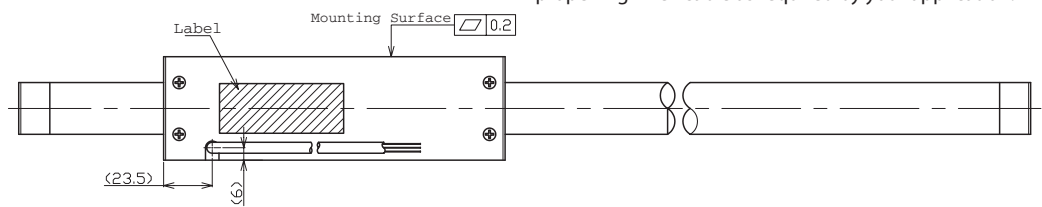

### Support and Bending

Stroke D/T/Q	Stroke X	Support Length (L2)	Max. Bending
0~700	0~500	50mm	0.00mm
701~1000	501~800	70mm	0.30mm
1001~1500	801~1300	70mm	0.70mm
1501~max	1301~max	100mm	0.70mm

Shaft Diameter (D) - 25mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)x2)

Stroke lengths available up to 2550mm. Contact Nippon Pulse for more information.

### Forcer Spacing Distance

Spec	S250T
Forcer Spacing Distance	15mm
Pole (N/S) Distance	45mm
Forcer Length	165mm
Flip Forcers	No


Tandem S250D forcers are possible, but are equivalent to one (1) S250Q forcer and thus are not listed. Tandem S250Q forcers are possible, but are equal to one (1) S250X forcer. (See S250X datasheet.)

### Tandem Forcer



Forcer Spacing Distance

### Hall Effect Specs

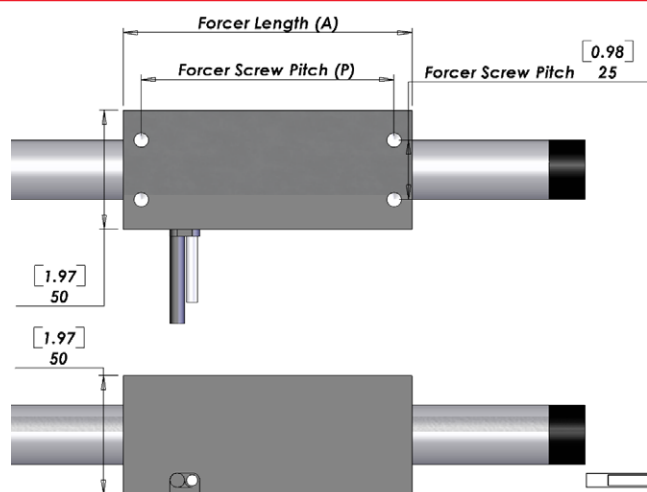

Note 1: The bending radius of the motor cable should be R36.6mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high-flex cable as required by your application.

## Shaft Length (L)


Stroke	S250D	S250T	S250Q
100	320mm (12.6in)	365mm (14.4in)	410mm (16.1in)
150	370mm (14.6in)	415mm (16.3in)	460mm (18.1in)
200	420mm (16.5in)	465mm (18.3in)	510mm (20.1in)
250	470mm (18.5in)	515mm (20.3in)	560mm (22in)
300	520mm (20.5in)	565mm (22.2in)	610mm (24in)
350	570mm (22.4in)	615mm (24.2in)	660mm (26in)
400	620mm (24.4in)	665mm (26.2in)	710mm (28in)
450	670mm (26.4in)	715mm (28.1in)	760mm (29.9in)
500	720mm (28.3in)	765mm (30.1in)	810mm (31.9in)
550	770mm (30.3in)	815mm (32.1in)	860mm (33.9in)
600	820mm (32.3in)	865mm (34.1in)	910mm (35.8in)
650	870mm (34.3in)	915mm (36in)	960mm (37.8in)
700	920mm (36.2in)	965mm (38in)	1010mm (39.8in)
750	1010mm (39.8in)	1055mm (41.5in)	1100mm (43.3in)
800	1060mm (41.7in)	1105mm (43.5in)	1150mm (45.3in)
850	1110mm (43.7in)	1155mm (45.5in)	1200mm (47.2in)
900	1160mm (45.7in)	1205mm (47.4in)	1250mm (49.2in)
950	1210mm (47.6in)	1255mm (49.4in)	1300mm (51.2in)
1000	1260mm (49.6in)	1305mm (51.4in)	1350mm (53.1in)
1050	1310mm (51.6in)	1355mm (53.3in)	1400mm (55.1in)
1100	1360mm (53.5in)	1405mm (55.3in)	1450mm (57.1in)
1150	1410mm (55.5in)	1455mm (57.3in)	1500mm (59.1in)
1200	1460mm (57.5in)	1505mm (59.3in)	1550mm (61in)
1250	1510mm (59.4in)	1555mm (61.2in)	1600mm (63in)
1300	1560mm (61.4in)	1605mm (63.2in)	1650mm (65in)
1350	1610mm (63.4in)	1655mm (65.2in)	1700mm (66.9in)
1400	1660mm (65.4in)	1705mm (67.1in)	1750mm (68.9in)
1450	1710mm (67.3in)	1755mm (69.1in)	1800mm (70.9in)
1500	1760mm (69.3in)	1805mm (71.1in)	1850mm (72.8in)
1550	1870mm (73.6in)	1915mm (73.6in)	1960mm (77.2in)

## Shaft Mass

Stroke	S250D	S250T	S250Q
100	0.9kg (2lb)	1.1kg (2.3lb)	1.2kg (2.7lb)
150	1.1kg (2.4lb)	1.2kg (2.7lb)	1.4kg (3.1lb)
200	1.2kg (2.7lb)	1.4kg (3.1lb)	1.6kg (3.4lb)
250	1.4kg (3.1lb)	1.6kg (3.5lb)	1.7kg (3.8lb)
300	1.6kg (3.5lb)	1.7kg (3.8lb)	1.9kg (4.2lb)
350	1.8kg (3.9lb)	1.9kg (4.2lb)	2.1kg (4.6lb)
400	1.9kg (4.3lb)	2.1kg (4.6lb)	2.2kg (4.9lb)
450	2.1kg (4.6lb)	2.3kg (5lb)	2.4kg (5.3lb)
500	2.3kg (5lb)	2.4kg (5.4lb)	2.6kg (5.7lb)
550	2.4kg (5.4lb)	2.6kg (5.7lb)	2.8kg (6.1lb)
600	2.6kg (5.8lb)	2.8kg (6.1lb)	2.9kg (6.5lb)
650	2.8kg (6.2lb)	2.9kg (6.5lb)	3.1kg (6.8lb)
700	3kg (6.5lb)	3.1kg (6.9lb)	3.3kg (7.2lb)
750	3.2kg (7lb)	3.4kg (7.4lb)	3.5kg (7.7lb)
800	3.4kg (7.4lb)	3.5kg (7.8lb)	3.7kg (8.1lb)
850	3.5kg (7.8lb)	3.7kg (8.1lb)	3.8kg (8.5lb)
900	3.7kg (8.2lb)	3.9kg (8.5lb)	4kg (8.9lb)
950	3.9kg (8.6lb)	4kg (8.9lb)	4.2kg (9.2lb)
1000	4.1kg (8.9lb)	4.2kg (9.3lb)	4.4kg (9.6lb)
1050	4.2kg (9.3lb)	4.4kg (9.7lb)	4.5kg (10lb)
1100	4.4kg (9.7lb)	4.6kg (10lb)	4.7kg (10.4lb)
1150	4.6kg (10.1lb)	4.7kg (10.4lb)	4.9kg (10.8lb)
1200	4.7kg (10.5lb)	4.9kg (10.8lb)	5.1kg (11.1lb)
1250	4.9kg (10.8lb)	5.1kg (11.2lb)	5.2kg (11.5lb)
1300	5.1kg (11.2lb)	5.2kg (11.6lb)	5.4kg (11.9lb)
1350	5.3kg (11.6lb)	5.4kg (11.9lb)	5.6kg (12.3lb)
1400	5.4kg (12lb)	5.6kg (12.3lb)	5.7kg (12.7lb)
1450	5.6kg (12.3lb)	5.8kg (12.7lb)	5.9kg (13lb)
1500	5.8kg (12.7lb)	5.9kg (13.1lb)	6.1kg (13.4lb)
1550	6kg (13.3lb)	6.2kg (13.6lb)	6.3kg (14lb)

Additional stroke lengths are available (up to 2615mm for S250D, 2570mm for S250T, and 2525mm for S250Q). Contact Nippon Pulse for more information.

## FG Type Motor Cable

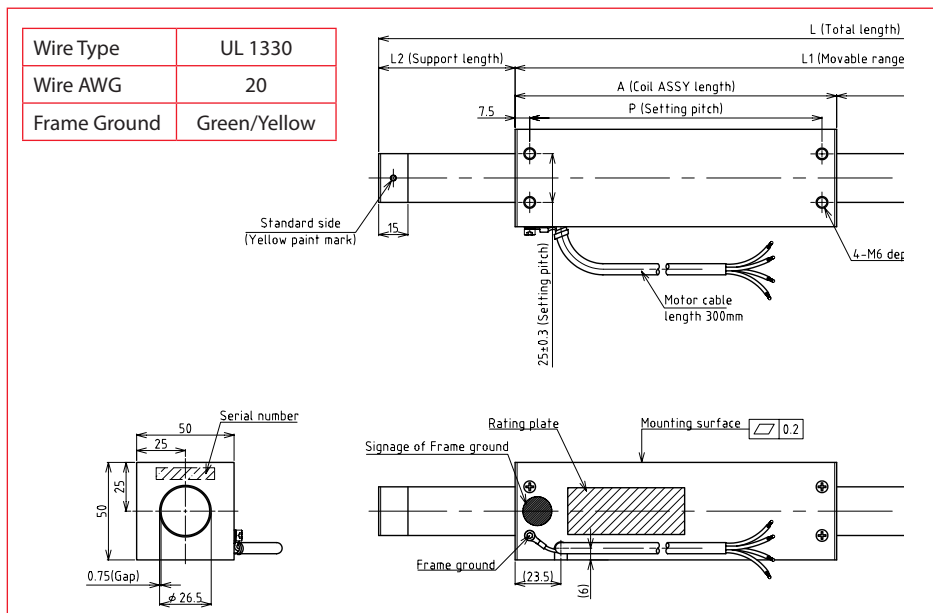

## Connector (Motor Cable)

Receptacle Housing	HLR-03V
Plug Housing	HLP-03V
Retainer	HLS-03V
Pin Contact	SSM-21T-P1.4
Socket Contact	SSF-21T-P1.4

To be installed by the user.

## Thermocouple

Thermal sensor  
Thermocouple K type (marked each phase name)  
Attached to the surface of inside of coil  
Length 3000mm

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	L250D		L250T		L250Q		
	L250D	L250D-1S	L250T	L250T-1S	L250Q	L250Q-1S	L250Q-2S
Continuous Force <sup>1</sup>	34N (7.6lbs)		52N (11.7lbs)		69N (15.5lbs)		
Continuous Current <sup>1</sup>	1.3Arms	2.6Arms	1.3Arms	3.9Arms	1.3Arms	5.2Arms	2.6Arms
Acceleration Force <sup>2</sup>	138N (31.0lbs)		207N (46.5lbs)		276N (62lbs)		
Acceleration Current <sup>2</sup>	5.2Arms	10.4Arms	5.2Arms	15.6Arms	5.2Arms	20.8Arms	10.4Arms
Force Constant (K <sub>f</sub> )	27N/amp	13N/amp	40N/amp	13N/amp	53N/amp	13N/amp	27N/amp
Back EMF (K <sub>e</sub> )	9V/m/s	4V/m/s	13V/m/s	4V/m/s	18V/m/s	4.4V/m/s	8.8V/m/s
Resistance 25°C <sup>3</sup>	8.4Ω	2.1Ω	13Ω	1.4Ω	17Ω	1Ω	4.2Ω
Inductance <sup>3</sup>	9.2mH	2.3mH	14mH	1.5mH	18mH	1.2mH	4.6mH
Electric Time Constant	1.11ms		1.11ms		1.11ms		
Fundamental Motor Constant (K <sub>m</sub> )	9.17N√W		11.23N√W		12.97N√W		
Magnetic Pitch (North-North)	90mm		90mm		90mm		

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, contact Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	L250D		L250T		L250Q		
	L250D	L250D-1S	L250T	L250T-1S	L250Q	L250Q-1S	L250Q-2S
Max Phase Temperature <sup>4</sup>	135°C (275°F)						
Thermal Resistance (Coil) (K <sub>v</sub> )	7.8°C/W (46°F/W)		5.2°C/W (41.4°F/W)		3.9°C/W (39°F/W)		

<sup>4</sup>The standard temperature difference between the coil and the forcer surface is 20°C.

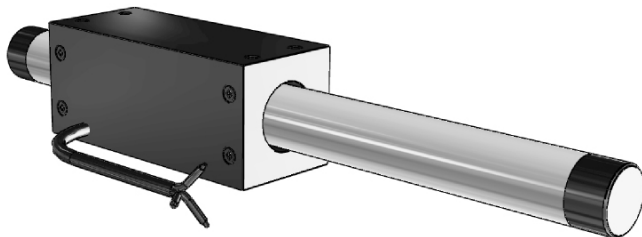

### Bus Voltage

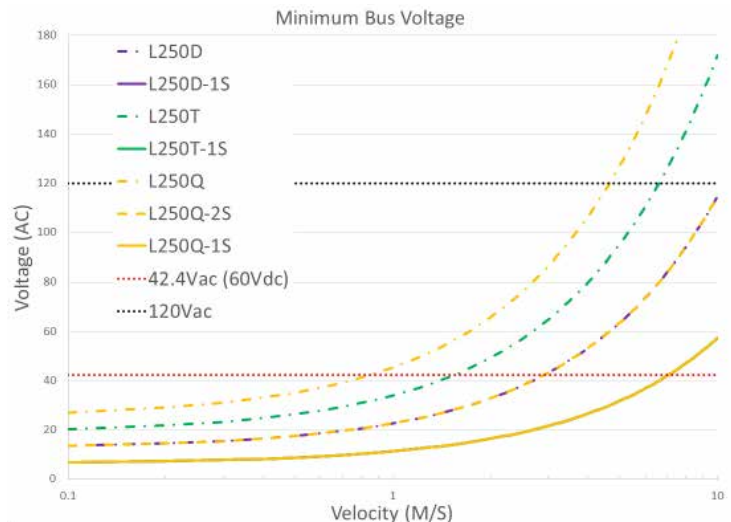

### Part Numbering System

L — Shaft Size 250  
 — Forcer Size (A) X  
     D: Double (2) windings  
     T: Triple (3) windings  
     Q: Quadruple (4) windings  
 — Alt. Winding XX  
     Blank: Standard  
     \_S: Alternate Winding  
 — Parallel Option XX  
     Blank: Single Motor  
     PL: Parallel Motors  
 — Usable Stroke (S) XXXXst  
     100-2000mm  
 — Options XX  
     Blank: Standard  
     WP: Water Resistant  
     HA: Digital Hall Effect  
     CE: CE Type Motor  
     FG: Frame Ground  
 — Options XX  
     Blank: Standard  
     FO: Forcer Only  
     SQ: Shaft Only


	L250D		L250T		L250Q		
Forcer Specs	L250D	L250D-1S	L250T	L250T-1S	L250Q	L250Q-1S	L250Q-2S
Forcer Length (A)	120mm (4.72in)		165mm (6.5in)		210mm (8.27in)		
Forcer Width	50mm (1.97in)		50mm (1.97in)		50mm (1.97in)		
Forcer Screw Pitch (P)	105mm (4.1in)		150mm (5.9in)		195mm (7.7in)		
Forcer Weight	0.77kg (1.7lbs)		1.1kg (2.4lbs)		1.5kg (3.3lbs)		
Gap	2.0mm (0.08in)		2.0mm (0.08in)		2.0mm (0.08in)		

Tolerances are as follows:



Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch


Unless otherwise specified, dimensions are in mm

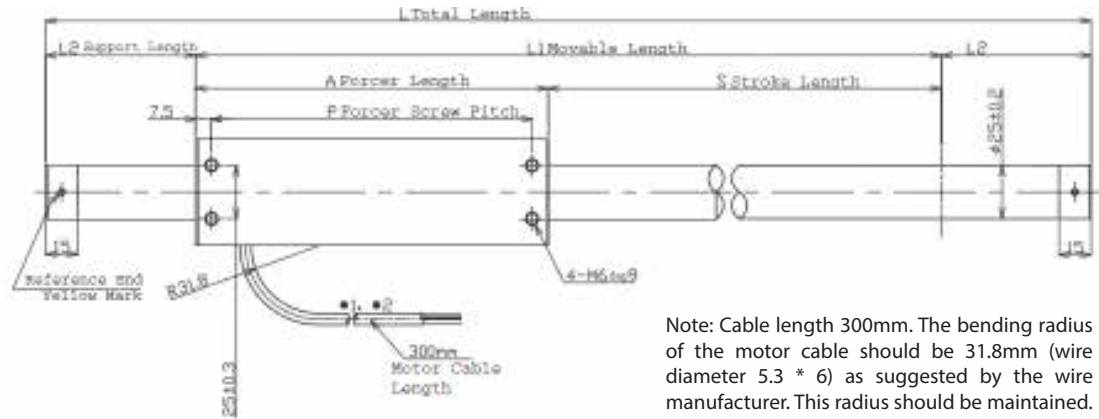

Note: Cable length 300mm. The bending radius of the motor cable should be 31.8mm (wire diameter 5.3 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

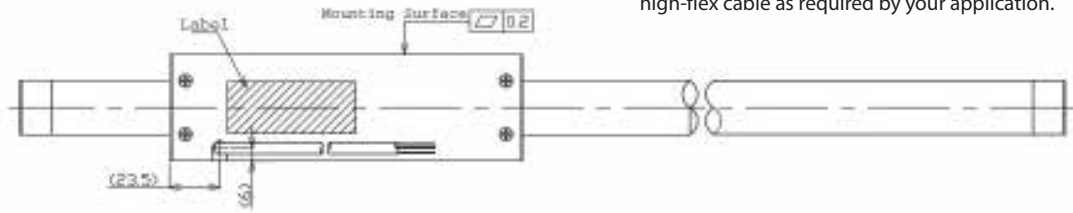

### Hall Effect Specs

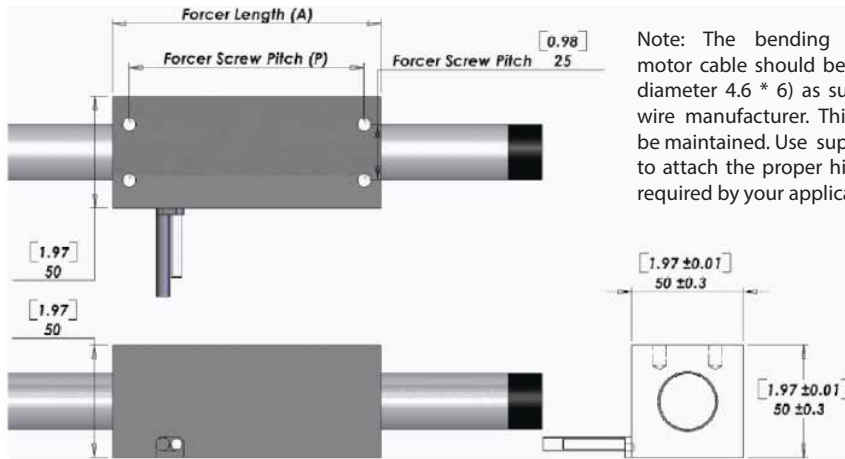

Note: The bending radius of the motor cable should be R31.8mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high flex cable as required by your application.

### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high flex cable as required by your application.

## FG Type Motor Cable

Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

Wire Type	UL 2464FA	300mm lead wire bare leads. The bending radius of the motor cable should be 31.8mm as suggested by the wire manufacturer.
Wire AWG	20	
U Phase	Red	
V Phase	White	
W Phase	Black	


Ground Wire		300mm lead wire bare leads. The bending radius of the motor cable should be 18.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).
Wire Type	UL 1330	
Wire AWG	24	
U Phase	Red	
V Phase	White	
W Phase	Black	

## Forcer Spacing Distance


Spec	L250T	L250Q
Forcer Spacing Distance	15mm	
Pole (N/S) Distance	45mm	
Forcer Length	165mm	210mm
Flip Forcers	No	Yes

Tandem L250D forcers are possible, but are equivalent to one (1) L250Q forcer and thus are not listed above.

## Tandem Forcer



## THM Option

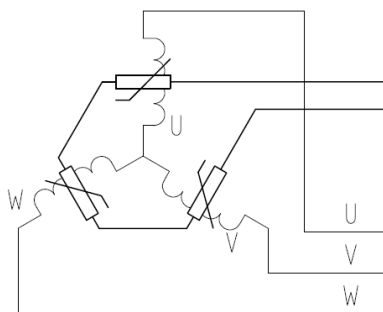

Circuit Diagram

4. Thermistor  
PTCSL20T071DBE(Vishay)

## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~700	50mm	0.00mm
701~1000	70mm	0.30mm
1001~1500	70mm	0.70mm
1501~max	100mm	0.70mm

Shaft Diameter (D) - 20.5mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length(A)+(Support Length (L2)x2)

## Connector (Motor Cable)

Receptacle Housing	HLR-03V
Plug Housing	HLP-03V
Retainer	HLS-03V
Pin Contact	SSM-21T-P1.4
Socket Contact	SSF-21T-P1.4

To be installed by the user.

## Thermocouple

Thermal sensor  
Thermocouple K type (marked each phase name)  
Attached to the surface of inside of coil  
Length 3000mm

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

www.nipponpulse.com

Your Partner In Motion Control

Sold & Serviced By:

ELECTROMATE

Toll Free Phone (977) SERV098  
Call Fax (977) SERV099  
www.elect-omate.com  
sales@electomate.com

NIPPONPULSE.COM 53

## Shaft Length (L)

Stroke	L250D	L250T	L250Q
100	320mm (12.6in)	365mm (14.4in)	410mm (16.1in)
150	370mm (14.6in)	415mm (16.3in)	460mm (18.1in)
200	420mm (16.5in)	465mm (18.3in)	510mm (20.1in)
250	470mm (18.5in)	515mm (20.3in)	560mm (22in)
300	520mm (20.5in)	565mm (22.2in)	610mm (24in)
350	570mm (22.4in)	615mm (24.2in)	660mm (26in)
400	620mm (24.4in)	665mm (26.2in)	710mm (28in)
450	670mm (26.4in)	715mm (28.1in)	760mm (29.9in)
500	720mm (28.3in)	765mm (30.1in)	810mm (31.9in)
550	770mm (30.3in)	815mm (32.1in)	860mm (33.9in)
600	820mm (32.3in)	865mm (34.1in)	910mm (35.8in)
650	870mm (34.3in)	915mm (36in)	960mm (37.8in)
700	920mm (36.2in)	965mm (38in)	1010mm (39.8in)
750	1010mm (39.8in)	1055mm (41.5in)	1100mm (43.3in)
800	1060mm (41.7in)	1105mm (43.5in)	1150mm (45.3in)
850	1110mm (43.7in)	1155mm (45.5in)	1200mm (47.2in)
900	1160mm (45.7in)	1205mm (47.4in)	1250mm (49.2in)
950	1210mm (47.6in)	1255mm (49.4in)	1300mm (51.2in)
1000	1260mm (49.6in)	1305mm (51.4in)	1350mm (53.1in)
1050	1310mm (51.6in)	1355mm (53.3in)	1400mm (55.1in)
1100	1360mm (53.5in)	1405mm (55.3in)	1450mm (57.1in)
1150	1410mm (55.5in)	1455mm (57.3in)	1500mm (59.1in)
1200	1460mm (57.5in)	1505mm (59.3in)	1550mm (61in)
1250	1510mm (59.4in)	1555mm (61.2in)	1600mm (63in)
1300	1560mm (61.4in)	1605mm (63.2in)	1650mm (65in)
1350	1610mm (63.4in)	1655mm (65.2in)	1700mm (66.9in)
1400	1660mm (65.4in)	1705mm (67.1in)	1750mm (68.9in)
1450	1710mm (67.3in)	1755mm (69.1in)	1800mm (70.9in)
1500	1760mm (69.3in)	1805mm (71.1in)	1850mm (72.8in)
1550	1870mm (73.6in)	1915mm (75.4in)	1960mm (77.2in)
1600	1920mm (75.6in)	1965mm (77.4in)	2010mm (79.1in)
1650	1970mm (77.6in)	2015mm (79.3in)	2060mm (81.1in)
1700	2020mm (79.5in)	2065mm (81.3in)	2110mm (83.1in)
1750	2070mm (81.5in)	2115mm (83.3in)	2160mm (85in)
1800	2120mm (83.5in)	2165mm (85.2in)	2210mm (87in)
1850	2170mm (85.4in)	2215mm (87.2in)	2260mm (89in)
1900	2220mm (87.4in)	2265mm (89.2in)	2310mm (90.9in)
1950	2270mm (89.4in)	2315mm (91.1in)	2360mm (92.9in)
2000	2320mm (91.3in)	2365mm (93.1in)	2410mm (94.9in)

## Shaft Mass

Stroke	L250D	L250T	L250Q
100	0.9kg (2lb)	1.1kg (2.4lb)	1.2kg (2.6lb)
150	1.1kg (2.4lb)	1.2kg (2.6lb)	1.4kg (3.1lb)
200	1.2kg (2.6lb)	1.4kg (3.1lb)	1.6kg (3.5lb)
250	1.4kg (3.1lb)	1.6kg (3.5lb)	1.7kg (3.7lb)
300	1.6kg (3.5lb)	1.7kg (3.7lb)	1.9kg (4.2lb)
350	1.8kg (4lb)	1.9kg (4.2lb)	2.1kg (4.6lb)
400	1.9kg (4.2lb)	2.1kg (4.6lb)	2.2kg (4.9lb)
450	2.1kg (4.6lb)	2.3kg (5.1lb)	2.4kg (5.3lb)
500	2.3kg (5.1lb)	2.4kg (5.3lb)	2.6kg (5.7lb)
550	2.4kg (5.3lb)	2.6kg (5.7lb)	2.8kg (6.2lb)
600	2.6kg (5.7lb)	2.8kg (6.2lb)	2.9kg (6.4lb)
650	2.8kg (6.2lb)	2.9kg (6.4lb)	3.1kg (6.8lb)
700	3kg (6.6lb)	3.1kg (6.8lb)	3.3kg (7.3lb)
750	3.2kg (7.1lb)	3.4kg (7.5lb)	3.5kg (7.7lb)
800	3.4kg (7.5lb)	3.5kg (7.7lb)	3.7kg (8.2lb)
850	3.5kg (7.7lb)	3.7kg (8.2lb)	3.8kg (8.4lb)
900	3.7kg (8.2lb)	3.9kg (8.6lb)	4kg (8.8lb)
950	3.9kg (8.6lb)	4kg (8.8lb)	4.2kg (9.3lb)
1000	4.1kg (9lb)	4.2kg (9.3lb)	4.4kg (9.7lb)
1050	4.2kg (9.3lb)	4.4kg (9.7lb)	4.5kg (9.9lb)
1100	4.4kg (9.7lb)	4.6kg (10.1lb)	4.7kg (10.4lb)
1150	4.6kg (10.1lb)	4.7kg (10.4lb)	4.9kg (10.8lb)
1200	4.7kg (10.4lb)	4.9kg (10.8lb)	5.1kg (11.2lb)
1250	4.9kg (10.8lb)	5.1kg (11.2lb)	5.2kg (11.5lb)
1300	5.1kg (11.2lb)	5.2kg (11.5lb)	5.4kg (11.9lb)
1350	5.3kg (11.7lb)	5.4kg (11.9lb)	5.6kg (12.3lb)
1400	5.4kg (11.9lb)	5.6kg (12.3lb)	5.7kg (12.6lb)
1450	5.6kg (12.3lb)	5.8kg (12.8lb)	5.9kg (13lb)
1500	5.8kg (12.8lb)	5.9kg (13lb)	6.1kg (13.4lb)
1550	6kg (13.2lb)	6.2kg (13.7lb)	6.3kg (13.9lb)
1600	6.2kg (13.7lb)	6.3kg (13.9lb)	6.5kg (14.3lb)
1650	6.3kg (13.9lb)	6.5kg (14.3lb)	6.6kg (14.6lb)
1700	6.5kg (14.3lb)	6.7kg (14.8lb)	6.8kg (15lb)
1750	6.7kg (14.8lb)	6.8kg (15lb)	7kg (15.4lb)
1800	6.9kg (15.2lb)	7kg (15.4lb)	7.2kg (15.9lb)
1850	7kg (15.4lb)	7.2kg (15.9lb)	7.3kg (16.1lb)
1900	7.2kg (15.9lb)	7.4kg (16.3lb)	7.5kg (16.5lb)
1950	7.4kg (16.3lb)	7.5kg (16.5lb)	7.7kg (17lb)
2000	7.6kg (16.8lb)	7.7kg (17lb)	7.9kg (17.4lb)

Additional stroke lengths up to 2500 are available. Contact Nippon Pulse for more information.

For assistance in selecting the best motor for your application, contact Nippon Pulse to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	L250SS	L250DS	L250TS	L250QS
Continuous Force <sup>1</sup>	17N (3.8lbs)	29N (6.52lbs)	44N (9.89lbs)	55N (12.36lbs)
Continuous Current <sup>1</sup>	1.3Arms	1.1Arms	1.0Arms	
Acceleration Force <sup>2</sup>	69N (15.5lbs)	118N (26.53lbs)	176N (39.57lbs)	220N (49.46lbs)
Acceleration Current <sup>2</sup>	5.1Arms	4.3Arms	4.2Arms	3.9Arms
Force Constant (K <sub>f</sub> )	13N/amp (2.9lbs/amp)	28N/amp (6.29lbs/amp)	42N/amp (9.44lbs/amp)	57N/amp (12.81lbs/amp)
Back EMF (K <sub>e</sub> )	4.5V/m/s	9.2V/m/s	14V/m/s	19V/m/s
Resistance 25°C <sup>3</sup>	6.5Ω	13Ω	19Ω	25Ω
Inductance <sup>3</sup>	11mH	19mH	28mH	37mH
Electric Time Constant	1.75ms	1.47ms	1.48ms	1.45ms
Fundamental Motor Constant (K <sub>m</sub> )	5.28N√W	7.78N√W	9.66N√W	11.23N√W
Magnetic Pitch (North-North)	60mm (2.36in)			

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, contact Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	L250SS	L250DS	L250TS	L250QS
Max Phase Temperature <sup>4</sup>	135°C (275°F)			
Thermal Resistance (Coil) (K <sub>q</sub> )	10.0°C/W (50°F/W)	7.7°C/W (45.86°F/W)	5.3°C/W (41.54°F/W)	4.6°C/W (40.28°F/W)

<sup>4</sup>The standard temperature difference between the coil and the forcer surface is 40°C.

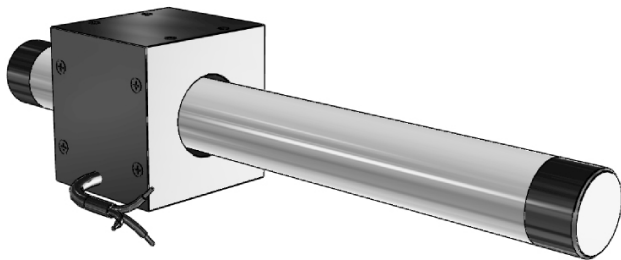

## Bus Voltage

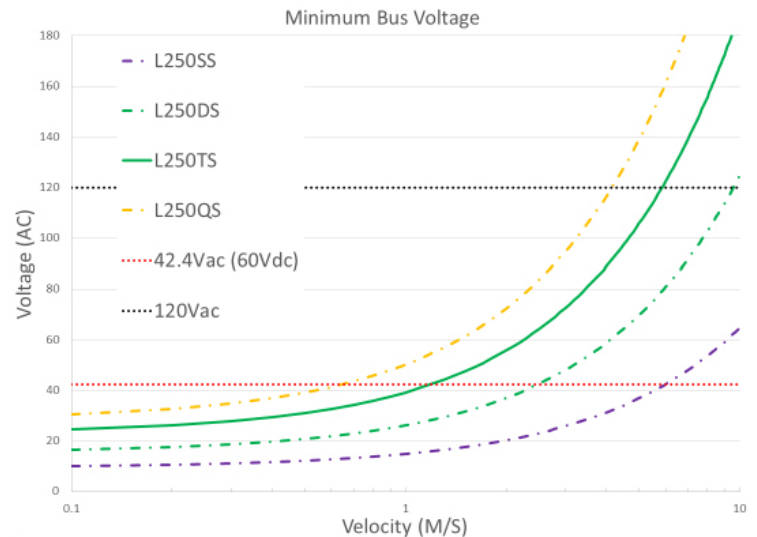

Forcer Specs	L250SS	L250DS	L250TS	L250QS
Forcer Length (A)	50mm (1.97in)	80mm (3.15in)	110mm (4.33in)	140mm (5.51in)
Forcer Width	56mm (2.2in)			
Forcer Screw Pitch (P)	40mm (1.57in)	70mm (2.8in)	100mm (3.94in)	130mm (5.12in)
Forcer Weight	0.43kg (0.95lbs)	0.72kg (1.59lbs)	1.0kg (2.20lbs)	1.4kg (3.09lbs)
Gap	2.0mm (0.08in)			




Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified,  
dimensions are in mm

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

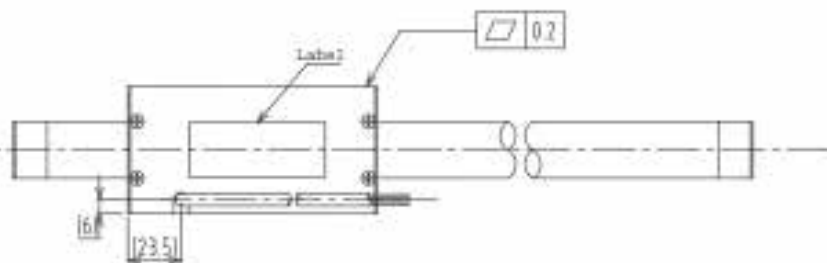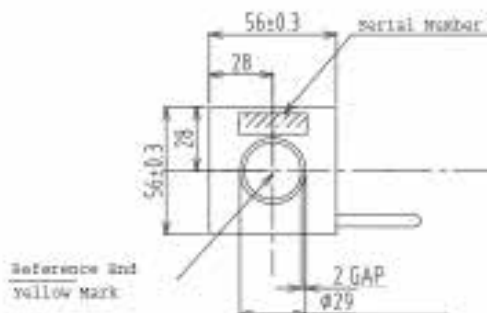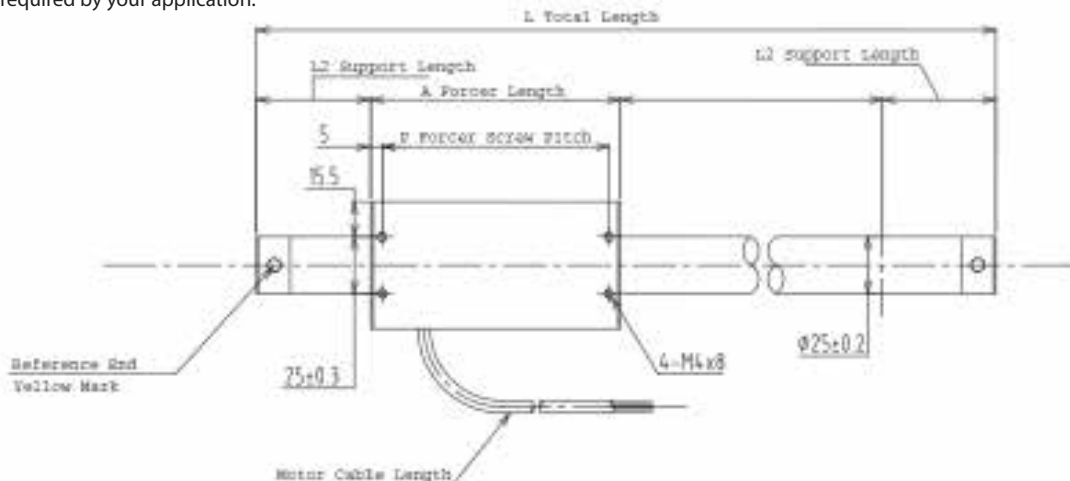

## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~850	50mm	0.00mm
900~1650	70mm	0.30mm
1700~max	100mm	0.70mm

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

[www.nipponpulse.com](http://www.nipponpulse.com)





Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	S320D		S320T		S320Q		
	S320D	S320D 1S	S320T	S320T 1S	S320Q	S320Q 2S	S320Q 1S
Continuous Force <sup>1</sup>	56N (12.59lbs)	55N (12.37lbs)	85N (19.11lbs)	80N (17.99lbs)	113N (25.40lbs)	104N (23.38lbs)	
Continuous Current <sup>1</sup>	1.2Arms	2.4Arms	1.2Arms	3.5Arms	1.2Arms	2.3Arms	4.6Arms
Acceleration Force <sup>2</sup>	226N (50.81lbs)	221N (49.69lbs)	338N (75.99lbs)	318N (71.49lbs)	451N (101.39lbs)	417N (93.75lbs)	
Acceleration Current <sup>2</sup>	5.0Arms	9.8Arms	5.0Arms	14Arms	5.0Arms	9.2Arms	18.4Arms
Force Constant (K <sub>f</sub> )	45N/Arms	23N/Arms	68N/Arms	23N/Arms	91N/Arms	45N/Arms	23N/Arms
Back EMF (K <sub>b</sub> )	15V/m/s	7.6V/m/s	23V/m/s	7.6V/m/s	30V/m/s	15V/m/s	7.6V/m/s
Resistance 25°C, <sup>3</sup>	11Ω	2.8Ω	17Ω	1.9Ω	23Ω	5.8Ω	1.4Ω
Inductance <sup>3</sup>	17mH	4.3mH	26mH	2.9mH	34.0mH	8.5mH	2.1mH
Electric Time Constant	1.55ms		1.53ms		1.48ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	13.84N√W	13.66N√W	17.62N√W	16.49N√W	20.49N√W	18.89N√W	
Magnetic Pitch (North-North)	120mm						

Is this the proper Linear Shaft Motor for your application? Use our **SMART sizing program** to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S320D	S320T	S320Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>θ</sub> )	6.7°C/W (44.1°F/W)	4.7°C/W (40.5°F/W)	3.6°C/W (38.5°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 25°C.

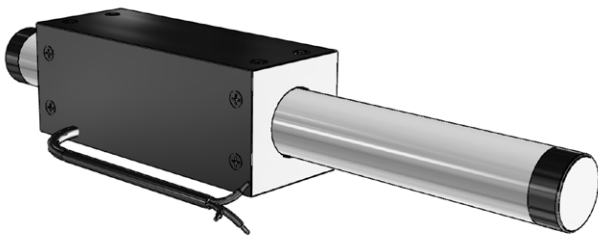


### Bus Voltage

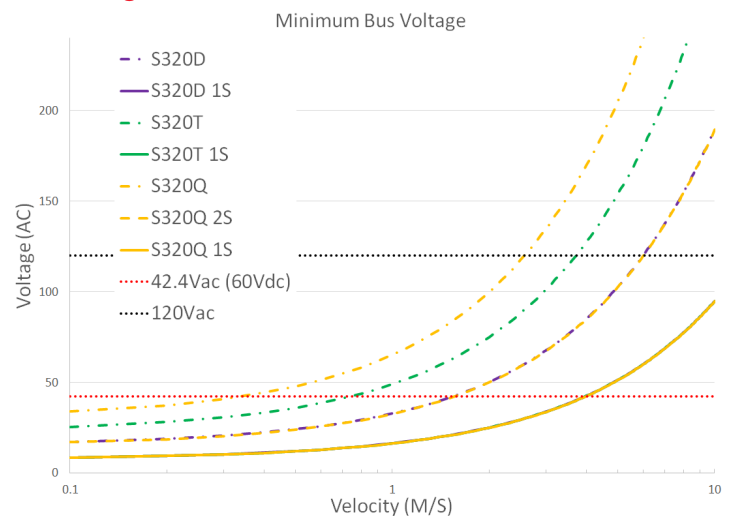

### Part Numbering System

S	—	Shaft Size	320	—	Forcer Size (A)	X	—	Parallel Option	XX	—	Usable Stroke (S)	XXXXst	—	Options	XX	—	Options	XX
		D: Double (2) windings			T: Triple (3) windings			Blank: Single Motor			100-2000mm			Blank: Standard			Blank: Standard	
		Q: Quadruple (4) windings						PL: Parallel Motors						WP: Water Resistant			FO: Forcer Only	
														HA: Digital Hall Effect			SO: Shaft Only	
														CE: CE type motor				
														FG: Frame Ground				

Forcer Specs	S320D	S320T	S320Q
Forcer Length (A)	160mm (6.3in)	220mm (8.7in)	280mm (11.0in)
Forcer Width	60mm (2.36in)		
Forcer Screw Pitch (P)	140mm (5.51in)	200mm (7.9in)	260mm (10.2in)
Forcer Weight	1.2kg (2.6lbs)	1.7kg (3.7lbs)	2.2kg (4.9lbs)
Gap	1.00mm (0.04in)		

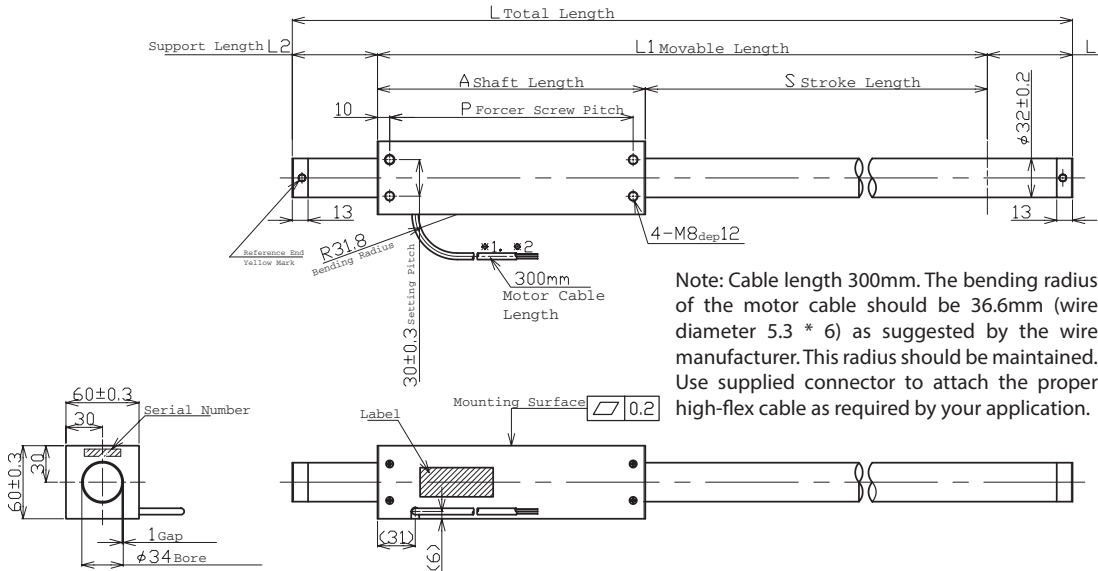

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 5.3 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.


Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

### Hall Effect Specs

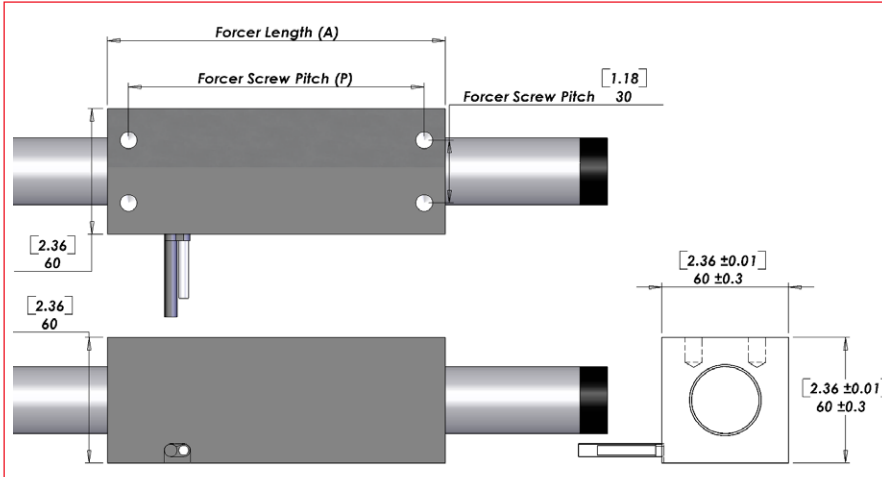


Note: The bending radius of the motor cable should be R36.6mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained.

### FG Type Motor Cable

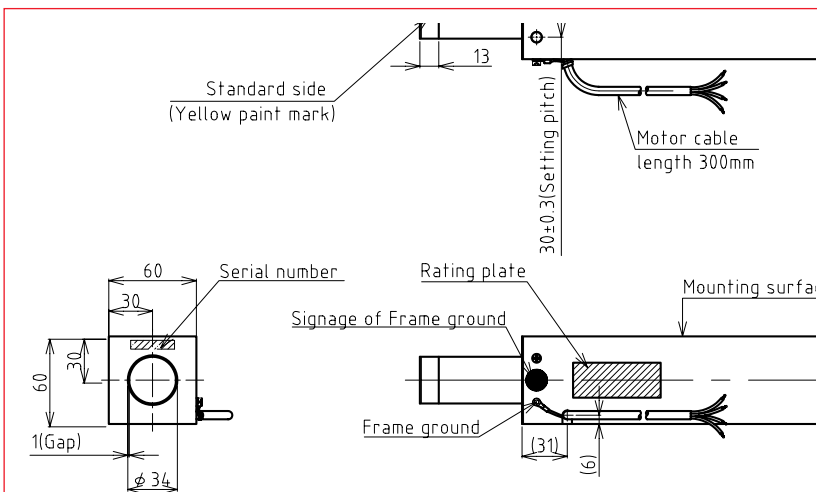

Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

### Standard Lead Wire

Wire Type	UL 2464FA
Wire AWG	20
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

Sold & Serviced By:  
  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
www.electromate.com  
sales@electromate.com

## Shaft Length (L)


Stroke	S320D	S320T	S320Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	410mm (16.1in)	470mm (18.5in)	530mm (20.9in)
200	460mm (18.1in)	520mm (20.5in)	580mm (22.8in)
250	510mm (20.1in)	570mm (22.4in)	630mm (24.8in)
300	560mm (22in)	620mm (24.4in)	680mm (26.8in)
350	610mm (24in)	670mm (26.4in)	730mm (28.7in)
400	660mm (26in)	720mm (28.3in)	780mm (30.7in)
450	710mm (28in)	770mm (30.3in)	830mm (32.7in)
500	760mm (29.9in)	820mm (32.3in)	880mm (34.6in)
550	810mm (31.9in)	870mm (34.3in)	930mm (36.6in)
600	860mm (33.9in)	920mm (36.2in)	980mm (38.6in)
650	910mm (35.8in)	970mm (38.2in)	1030mm (40.6in)
700	960mm (37.8in)	1020mm (40.2in)	1080mm (42.5in)
750	1010mm (39.8in)	1070mm (42.1in)	1130mm (44.5in)
800	1100mm (43.3in)	1160mm (45.7in)	1220mm (48in)
850	1150mm (45.3in)	1210mm (47.6in)	1270mm (50in)
900	1200mm (47.2in)	1260mm (49.6in)	1320mm (52in)
950	1250mm (49.2in)	1310mm (51.6in)	1370mm (53.9in)
1000	1300mm (51.2in)	1360mm (53.5in)	1420mm (55.9in)
1050	1350mm (53.1in)	1410mm (55.5in)	1470mm (57.9in)
1100	1400mm (55.1in)	1460mm (57.5in)	1520mm (59.8in)
1150	1450mm (57.1in)	1510mm (59.4in)	1570mm (61.8in)
1200	1500mm (59.1in)	1560mm (61.4in)	1620mm (63.8in)
1250	1550mm (61in)	1610mm (63.4in)	1670mm (65.7in)
1300	1600mm (63in)	1660mm (65.4in)	1720mm (67.7in)
1350	1650mm (65in)	1710mm (67.3in)	1770mm (69.7in)
1400	1700mm (66.9in)	1760mm (69.3in)	1820mm (71.7in)
1450	1750mm (68.9in)	1810mm (71.3in)	1870mm (73.6in)
1500	1800mm (70.9in)	1860mm (73.2in)	1920mm (75.6in)
1550	1910mm (75.2in)	1970mm (77.6in)	2030mm (79.9in)
1600	2020mm (79.5in)	2080mm (81.9in)	2140mm (84.3in)
1650	2130mm (83.9in)	2190mm (86.2in)	2250mm (88.6in)
1700	2240mm (88.2in)	2300mm (90.6in)	2360mm (92.9in)
1750	2350mm (92.5in)	2410mm (94.9in)	2470mm (97.2in)
1800	2460mm (96.9in)	2520mm (99.2in)	2580mm (101.6in)
1850	2570mm (101.2in)	2630mm (103.5in)	2690mm (105.9in)
1900	2680mm (105.5in)	2740mm (107.9in)	2800mm (110.2in)
1950	2790mm (109.8in)	2850mm (112.2in)	2910mm (114.6in)
2000	2900mm (114.2in)	2960mm (116.5in)	3020mm (118.9in)

## Shaft Mass

Stroke	S320D	S320T	S320Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	2.1kg (4.6lb)	2.4kg (5.4lb)	2.8kg (6.1lb)
200	2.4kg (5.2lb)	2.7kg (6lb)	3kg (6.7lb)
250	2.7kg (5.8lb)	3kg (6.6lb)	3.3kg (7.3lb)
300	2.9kg (6.5lb)	3.3kg (7.2lb)	3.6kg (8lb)
350	3.2kg (7.1lb)	3.6kg (7.8lb)	3.9kg (8.6lb)
400	3.5kg (7.7lb)	3.8kg (8.5lb)	4.2kg (9.2lb)
450	3.8kg (8.3lb)	4.1kg (9.1lb)	4.5kg (9.8lb)
500	4.1kg (8.9lb)	4.4kg (9.7lb)	4.7kg (10.4lb)
550	4.3kg (9.6lb)	4.7kg (10.3lb)	5kg (11.1lb)
600	4.6kg (10.2lb)	5kg (10.9lb)	5.3kg (11.7lb)
650	4.9kg (10.8lb)	5.2kg (11.6lb)	5.6kg (12.3lb)
700	5.2kg (11.4lb)	5.5kg (12.2lb)	5.9kg (12.9lb)
750	5.5kg (12.1lb)	5.8kg (12.8lb)	6.1kg (13.5lb)
800	5.8kg (12.9lb)	6.2kg (13.6lb)	6.5kg (14.4lb)
850	6.1kg (13.5lb)	6.5kg (14.3lb)	6.8kg (15lb)
900	6.4kg (14.1lb)	6.7kg (14.9lb)	7.1kg (15.6lb)
950	6.7kg (14.7lb)	7kg (15.5lb)	7.4kg (16.2lb)
1000	7kg (15.4lb)	7.3kg (16.1lb)	7.6kg (16.9lb)
1050	7.3kg (16lb)	7.6kg (16.7lb)	7.9kg (17.5lb)
1100	7.5kg (16.6lb)	7.9kg (17.4lb)	8.2kg (18.1lb)
1150	7.8kg (17.2lb)	8.2kg (18lb)	8.5kg (18.7lb)
1200	8.1kg (17.9lb)	8.4kg (18.6lb)	8.8kg (19.3lb)
1250	8.4kg (18.5lb)	8.7kg (19.2lb)	9.1kg (20lb)
1300	8.7kg (19.1lb)	9kg (19.8lb)	9.3kg (20.6lb)
1350	8.9kg (19.7lb)	9.3kg (20.5lb)	9.6kg (21.2lb)
1400	9.2kg (20.3lb)	9.6kg (21.1lb)	9.9kg (21.8lb)
1450	9.5kg (21lb)	9.8kg (21.7lb)	10.2kg (22.4lb)
1500	9.8kg (21.6lb)	10.1kg (22.3lb)	10.5kg (23.1lb)
1550	10.2kg (22.5lb)	10.5kg (23.3lb)	10.9kg (24lb)
1600	10.5kg (23.1lb)	10.8kg (23.9lb)	11.2kg (24.6lb)
1650	10.8kg (23.8lb)	11.1kg (24.5lb)	11.5kg (25.2lb)
1700	11.1kg (24.4lb)	11.4kg (25.1lb)	11.7kg (25.9lb)
1750	11.3kg (25lb)	11.7kg (25.7lb)	12kg (26.5lb)
1800	11.6kg (25.6lb)	12kg (26.4lb)	12.3kg (27.1lb)
1850	11.9kg (26.2lb)	12.2kg (27lb)	12.6kg (27.7lb)
1900	12.2kg (26.9lb)	12.5kg (27.6lb)	12.9kg (28.3lb)
1950	12.5kg (27.5lb)	12.8kg (28.2lb)	13.1kg (29lb)
2000	12.7kg (28.1lb)	13.1kg (28.8lb)	13.4kg (29.6lb)

Additional stroke lengths are available (up to 2310mm for S320D, 2250mm for S320T, and 2190mm for S320Q). Contact Nippon Pulse for more information.

## CE Option - CE Type Lead Wire

Ground Wire	
Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 18.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).

## Forcer Spacing Distance

Spec	S320T	S320Q
Forcer Spacing Distance	20mm	
Pole (N/S) Distance	60mm	
Forcer Length	220mm	280mm
Flip Forcers	No	Yes


Tandem S320D forcers are possible, but are equivalent to one (1) S320Q forcer and thus are not listed above.

## Tandem Forcer



Forcer Spacing Distance

## THM Option

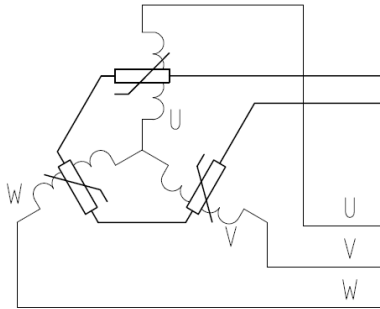

Circuit Diagram

4. Thermistor  
PTCSL20T071DBE(Vishay)

## Support and Bending

Stroke (D/T/Q)	Support Length (L2)	Max. Bending
0~750	50mm	0.00mm
751~1000	70mm	0.30mm
1001~1500	70mm	0.70mm
1501~max	100mm	0.70mm

Shaft Diameter (D) - 32mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)x2)

## Connector (Motor Cable)

Receptacle Housing	HLR-03V
Plug Housing	HLP-03V
Retainer	HLS-03V
Pin Contact	SSM-21T-P1.4
Socket Contact	SSF-21T-P1.4

To be installed by the user.

## Thermocouple

Thermal sensor  
Thermocouple K type (marked each phase name)  
Attached to the surface of inside of coil  
Length 3000mm

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse  
to speak with an applications engineer. 1-540-633-1677

Your Partner In Motion Control

Sold & Serviced By:  
**ELECTROMATE**

Toll Free Phone (877) SERV098  
Tel Fax (540) SERV099  
www.elect-mate.com  
sales@electmate.com

NIPPONPULSE.COM | 61

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	L320D		L320T		L320Q		
	L320D	L320D-1S	L320T	L320T-1S	L320Q	L320Q-1S	L320Q-2S
Continuous Force <sup>1</sup>	55N (12.4lbs)		82N (18.4lbs)		109N (24.5lbs)		
Continuous Current <sup>1</sup>	1.3Arms	2.5Arms	1.3Arms	3.8Arms	1.3Arms	5.0Arms	2.5Arms
Acceleration Force <sup>2</sup>	218N (49lbs)		327N (73.5lbs)		436N (98lbs)		
Acceleration Current <sup>2</sup>	5.0Arms	10.0Arms	5.0Arms	15.0Arms	5.0Arms	20.0Arms	10.0Arms
Force Constant (K <sub>f</sub> )	44N/amp	22N/amp	65N/amp	22N/amp	87N/amp	22N/amp	44N/amp
Back EMF (K <sub>b</sub> )	15V/m/s	7.3V/m/s	22V/m/s	7.3V/m/s	29V/m/s	7.3V/m/s	15V/m/s
Resistance 25°C <sup>3</sup>	12Ω	2.9Ω	17Ω	1.9Ω	23Ω	1.4Ω	5.8Ω
Inductance <sup>3</sup>	14mH	3.5mH	21mH	2.3mH	28mH	1.8mH	7.0mH
Electric Time Constant	1.22ms		1.22ms		1.22ms		
Fundamental Motor Constant (K <sub>m</sub> )	12.84N√W		15.72N√W		18.15N√W		
Magnetic Pitch (North-North)	120mm		120mm		120mm		

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, contact Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	L320D		L320T		L320Q		
	L320D	L320D-1S	L320T	L320T-1S	L320Q	L320Q-1S	L320Q-2S
Max Phase Temperature <sup>4</sup>	135°C (275°F)						
Thermal Resistance (Coil) (K <sub>q</sub> )	6.1°C/W (43°F/W)		4.1°C/W (39.4°F/W)		3.1°C/W (37.6°F/W)		

<sup>4</sup>The standard temperature difference between the coil and the forcer surface is 25°C.

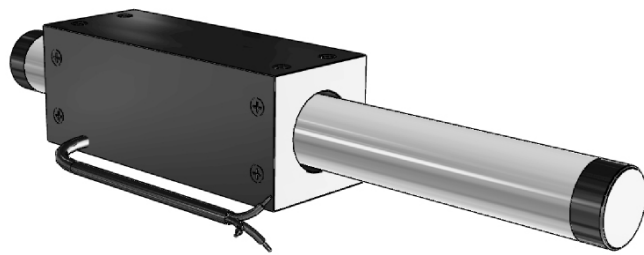

### Bus Voltage

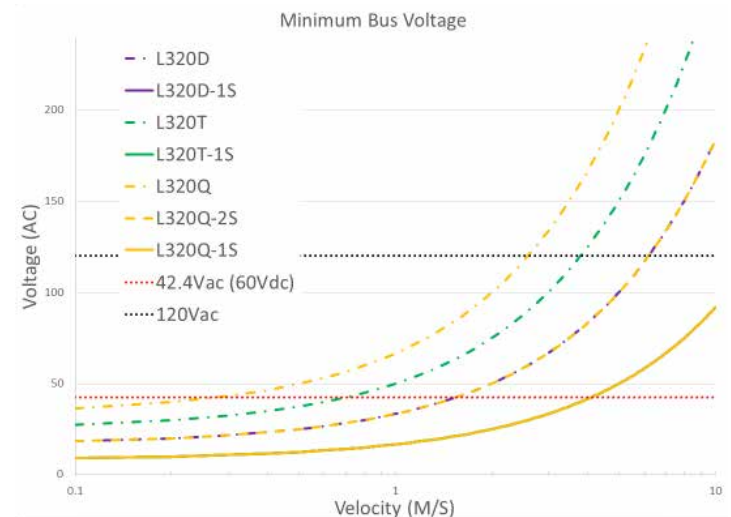

### Part Numbering System

L — Shaft Size 320 — Forcer Size (A) X — Alt. Winding XX — Parallel Option XX — Usable Stroke (S) XXXXst — Options XX — Options XX

D: Double (2) windings  
T: Triple (3) windings  
Q: Quadruple (4) windings

Blank: Standard  
\_S: Alternate Winding

Blank: Single Motor  
PL: Parallel Motors

100-2000mm

Blank: Standard  
WP: Water Resistant  
HA: Digital Hall Effect  
CE: CE Type Motor  
FG: Frame Ground

Blank: Standard  
FO: Forcer Only  
SO: Shaft Only


Sold & Serviced By:  
**ELECTROMATE**

Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

[www.nipponpulse.com](http://www.nipponpulse.com)



## FG Type Motor Cable

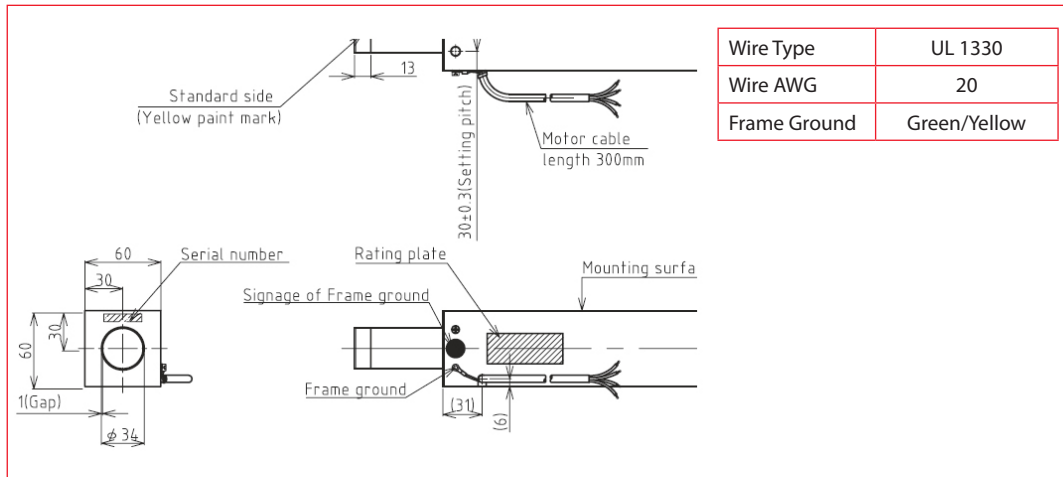

Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

## Standard Lead Wire

Wire Type	UL 2464FA
Wire AWG	20
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 31.8mm as suggested by the wire manufacturer.

## CE Option - Lead Wire

Ground Wire	CE
Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 1.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).

## Forcer Spacing Distance

Spec	L320T	L320Q
Forcer Spacing Distance	20mm	
Pole (N/S) Distance	60mm	
Forcer Length	220mm	280mm
Flip Forcers	No	Yes

Tandem L320D forcers are possible, but are equivalent to one (1) L320Q forcer and thus are not listed above.


## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~750	50mm	0.00mm
751~1000	70mm	0.30mm
1001~1500	70mm	0.70mm
1501~max	100mm	0.70mm


Shaft Diameter (D) - 32mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length(A)+(Support Length (L2)×2)

## Tandem Forcer




## THM Option

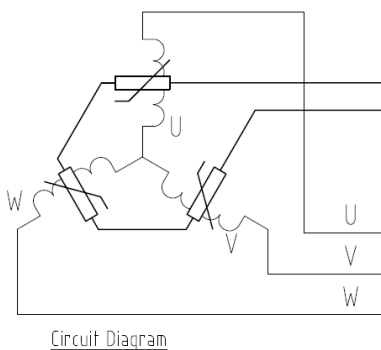

4. Thermistor

PTCSL20T071DBE(Vishay)

## Thermocouple

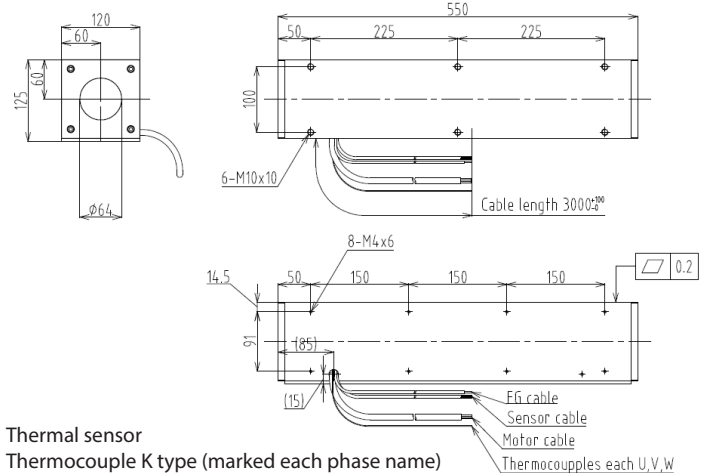

Thermal sensor

Thermocouple K type (marked each phase name)

Attached to the surface of inside of coil

Length 3000mm

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

www.nipponpulse.com



## Shaft Length (L)

Stroke	L320D	L320T	L320Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	410mm (16.1in)	470mm (18.5in)	530mm (20.9in)
200	460mm (18.1in)	520mm (20.5in)	580mm (22.8in)
250	510mm (20.1in)	570mm (22.4in)	630mm (24.8in)
300	560mm (22in)	620mm (24.4in)	680mm (26.8in)
350	610mm (24in)	670mm (26.4in)	730mm (28.7in)
400	660mm (26in)	720mm (28.3in)	780mm (30.7in)
450	710mm (28in)	770mm (30.3in)	830mm (32.7in)
500	760mm (29.9in)	820mm (32.3in)	880mm (34.6in)
550	810mm (31.9in)	870mm (34.3in)	930mm (36.6in)
600	860mm (33.9in)	920mm (36.2in)	980mm (38.6in)
650	910mm (35.8in)	970mm (38.2in)	1030mm (40.6in)
700	960mm (37.8in)	1020mm (40.2in)	1080mm (42.5in)
750	1010mm (39.8in)	1070mm (42.1in)	1130mm (44.5in)
800	1100mm (43.3in)	1160mm (45.7in)	1220mm (48in)
850	1150mm (45.3in)	1210mm (47.6in)	1270mm (50in)
900	1200mm (47.2in)	1260mm (49.6in)	1320mm (52in)
950	1250mm (49.2in)	1310mm (51.6in)	1370mm (53.9in)
1000	1300mm (51.2in)	1360mm (53.5in)	1420mm (55.9in)
1050	1350mm (53.1in)	1410mm (55.5in)	1470mm (57.9in)
1100	1400mm (55.1in)	1460mm (57.5in)	1520mm (59.8in)
1150	1450mm (57.1in)	1510mm (59.4in)	1570mm (61.8in)
1200	1500mm (59.1in)	1560mm (61.4in)	1620mm (63.8in)
1250	1550mm (61in)	1610mm (63.4in)	1670mm (65.7in)
1300	1600mm (63in)	1660mm (65.4in)	1720mm (67.7in)
1350	1650mm (65in)	1710mm (67.3in)	1770mm (69.7in)
1400	1700mm (66.9in)	1760mm (69.3in)	1820mm (71.7in)
1450	1750mm (68.9in)	1810mm (71.3in)	1870mm (73.6in)
1500	1800mm (70.9in)	1860mm (73.2in)	1920mm (75.6in)
1550	1910mm (75.2in)	1970mm (77.6in)	2030mm (79.9in)
1600	1960mm (77.2in)	2020mm (79.5in)	2080mm (81.9in)
1650	2010mm (79.1in)	2070mm (81.5in)	2130mm (83.9in)
1700	2060mm (81.1in)	2120mm (83.5in)	2180mm (85.8in)
1750	2110mm (83.1in)	2170mm (85.4in)	2230mm (87.8in)
1800	2160mm (85in)	2220mm (87.4in)	2280mm (89.8in)
1850	2210mm (87in)	2270mm (89.4in)	2330mm (91.7in)
1900	2260mm (89in)	2320mm (91.3in)	2380mm (93.7in)
1950	2310mm (90.9in)	2370mm (93.3in)	2430mm (95.7in)
2000	2360mm (92.9in)	2420mm (95.3in)	2480mm (97.6in)

## Shaft Mass

Stroke	L320D	L320T	L320Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	2.1kg (4.6lb)	2.4kg (5.3lb)	2.8kg (6.2lb)
200	2.4kg (5.3lb)	2.7kg (6lb)	3kg (6.6lb)
250	2.7kg (6lb)	3kg (6.6lb)	3.3kg (7.3lb)
300	2.9kg (6.4lb)	3.3kg (7.3lb)	3.6kg (7.9lb)
350	3.2kg (7.1lb)	3.6kg (7.9lb)	3.9kg (8.6lb)
400	3.5kg (7.7lb)	3.8kg (8.4lb)	4.2kg (9.3lb)
450	3.8kg (8.4lb)	4.1kg (9lb)	4.5kg (9.9lb)
500	4.1kg (9lb)	4.4kg (9.7lb)	4.7kg (10.4lb)
550	4.3kg (9.5lb)	4.7kg (10.4lb)	5kg (11lb)
600	4.6kg (10.1lb)	5kg (11lb)	5.3kg (11.7lb)
650	4.9kg (10.8lb)	5.2kg (11.5lb)	5.6kg (12.3lb)
700	5.2kg (11.5lb)	5.5kg (12.1lb)	5.9kg (13lb)
750	5.5kg (12.1lb)	5.8kg (12.8lb)	6.1kg (13.4lb)
800	5.8kg (12.8lb)	6.2kg (13.7lb)	6.5kg (14.3lb)
850	6.1kg (13.4lb)	6.5kg (14.3lb)	6.8kg (15lb)
900	6.4kg (14.1lb)	6.7kg (14.8lb)	7.1kg (15.7lb)
950	6.7kg (14.8lb)	7kg (15.4lb)	7.4kg (16.3lb)
1000	7kg (15.4lb)	7.3kg (16.1lb)	7.6kg (16.8lb)
1050	7.3kg (16.1lb)	7.6kg (16.8lb)	7.9kg (17.4lb)
1100	7.5kg (16.5lb)	7.9kg (17.4lb)	8.2kg (18lb)
1150	7.8kg (17.2lb)	8.2kg (18lb)	8.5kg (18.7lb)
1200	8.1kg (17.9lb)	8.4kg (18.5lb)	8.8kg (19.4lb)
1250	8.4kg (18.5lb)	8.7kg (19.2lb)	9.1kg (20.1lb)
1300	8.7kg (19.2lb)	9kg (19.8lb)	9.3kg (20.5lb)
1350	8.9kg (19.6lb)	9.3kg (20.5lb)	9.6kg (21.2lb)
1400	9.2kg (20.3lb)	9.6kg (21.2lb)	9.9kg (21.8lb)
1450	9.5kg (20.9lb)	9.8kg (21.6lb)	10.2kg (22.5lb)
1500	9.8kg (21.6lb)	10.1kg (22.3lb)	10.5kg (23.1lb)
1550	10.2kg (22.5lb)	10.5kg (23.1lb)	10.9kg (24lb)
1600	10.5kg (23.1lb)	10.8kg (23.8lb)	11.2kg (24.7lb)
1650	10.8kg (23.8lb)	11.1kg (24.5lb)	11.5kg (25.4lb)
1700	11.1kg (24.5lb)	11.4kg (25.1lb)	11.7kg (25.8lb)
1750	11.3kg (24.9lb)	11.7kg (25.8lb)	12kg (26.5lb)
1800	11.6kg (25.6lb)	12kg (26.5lb)	12.3kg (27.1lb)
1850	11.9kg (26.2lb)	12.2kg (26.9lb)	12.6kg (27.8lb)
1900	12.2kg (26.9lb)	12.5kg (27.6lb)	12.9kg (28.4lb)
1950	12.5kg (27.6lb)	12.8kg (28.2lb)	13.1kg (28.9lb)
2000	12.7kg (28lb)	13.1kg (28.9lb)	13.4kg (29.5lb)

Additional stroke lengths are available (up to 3640 for L320D, 3580 for L320T and 3520 for L320Q). Contact Nippon Pulse for more information.

For assistance in selecting the best motor for your application, contact Nippon Pulse to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Your Partner In Motion Control

Sold & Serviced By:  
  
 Tell-Free Phone (977) SERV098  
 Toll-Free Fax (977) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

NIPPONPULSE.COM 1-633-1677

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	L320SS	L320DS	L320TS	L320QS
Continuous Force <sup>1</sup>	19N (4.27lbs)	33N (7.42lbs)	48N (10.79lbs)	59N (13.26lbs)
Continuous Current <sup>1</sup>	1.7Arms	1.5Arms		1.3Arms
Acceleration Force <sup>2</sup>	75N (16.86lbs)	132N (29.67lbs)	193N (43.39lbs)	235N (52.83lbs)
Acceleration Current <sup>2</sup>	6.9Arms	6.0Arms	5.9Arms	5.2Arms
Force Constant ( $K_f$ )	11N/amp (2.47lbs/amp)	22N/amp (4.95lbs/amp)	33N/amp (7.42lbs/amp)	45N/amp (10.12lbs/amp)
Back EMF ( $K_e$ )	3.6V/m/s	7.3V/m/s	11V/m/s	15V/m/s
Resistance 25°C <sup>3</sup>	3.6Ω	7.1Ω	11Ω	14Ω
Inductance <sup>3</sup>	5.1mH	7.8mH	12mH	15mH
Electric Time Constant	1.42ms	1.10ms	1.11ms	1.08ms
Fundamental Motor Constant ( $K_m$ )	5.72N√W	8.27N√W	10.01N√W	11.94N√W
Magnetic Pitch (North-North)	60mm (2.36in)			

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, contact Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	L320SS	L320DS	L320TS	L320QS
Max Phase Temperature <sup>4</sup>	135°C (275°F)			
Thermal Resistance (Coil) ( $K_v$ )	10.0°C/W (50°F/W)	6.9°C/W (44.42°F/W)	4.7°C/W (40.46°F/W)	4.5°C/W (41°F/W)

<sup>4</sup>The standard temperature difference between the coil and the forcer surface is 40°C.

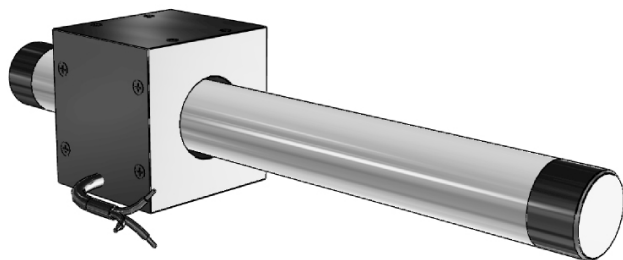


## Bus Voltage

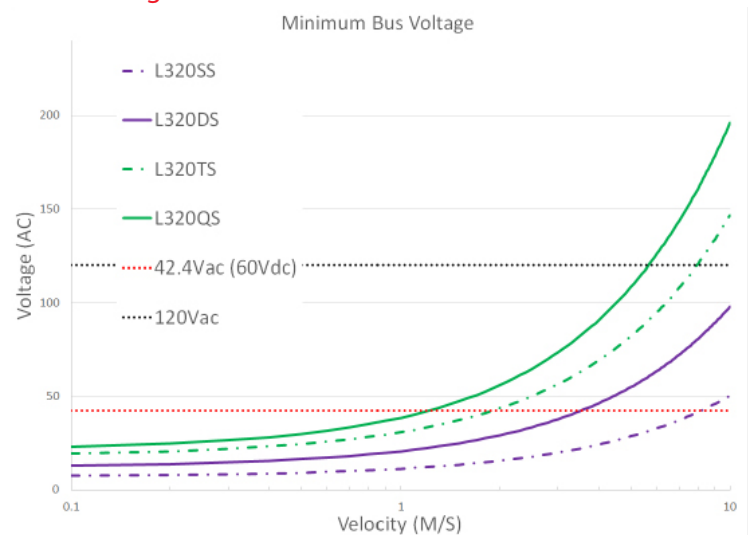




## Linear Shaft Motor Part Numbering Guide (SS Series)

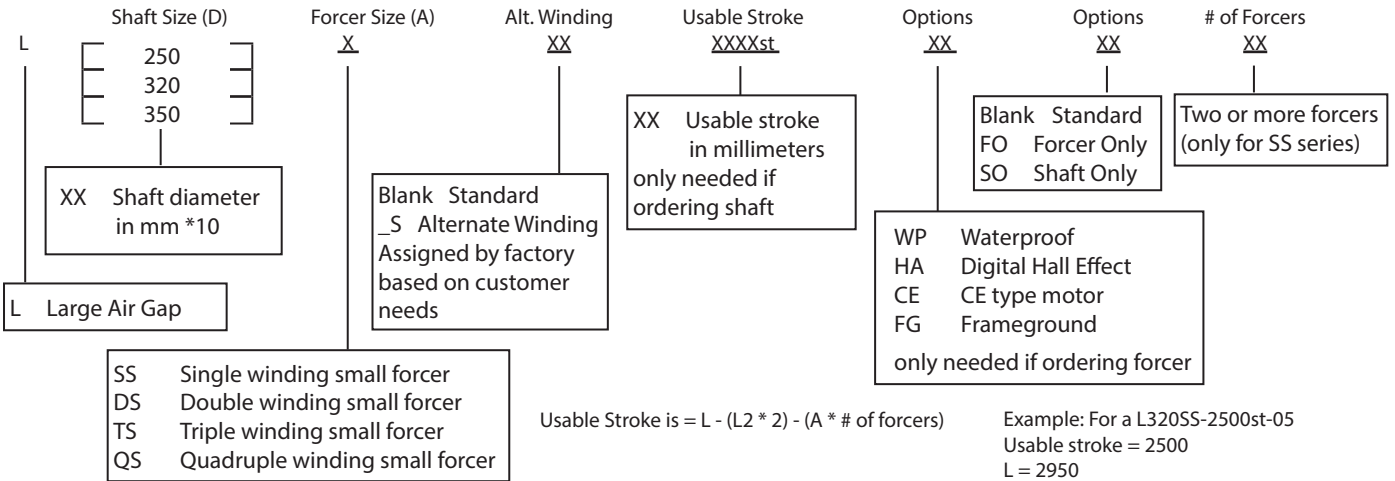


### Part Numbering Example

L350SS-1500st-03: Large air gap, 35mm shaft diameter, single winding, small forcer, stroke of 1500mm, three forcers

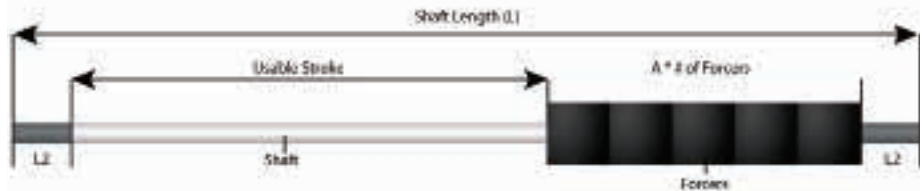


### THM Option

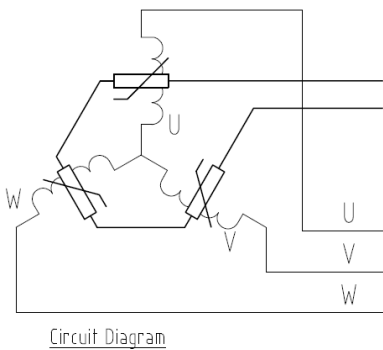

4. Thermistor

PTCSL20T071DBE(Vishay)

### Thermocouple

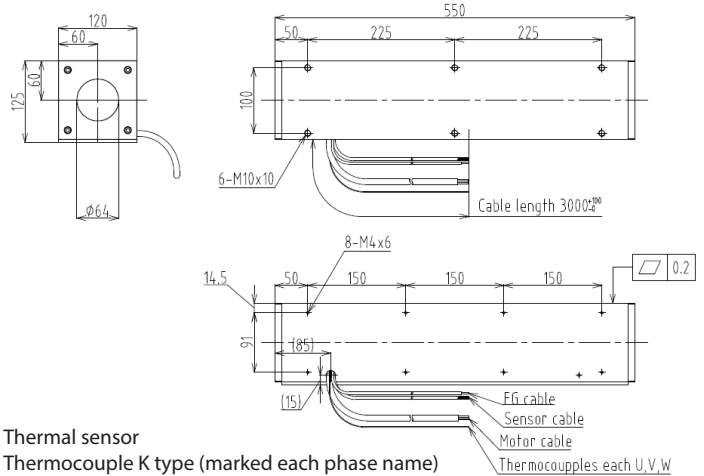

For assistance in selecting the best motor for your application, contact Nippon Pulse to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
**ELECTROMATE**

Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
sales@electromate.com

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

	S350D		S350T		S350Q		
Electrical Specs	S350D	S350D 1S	S350T	S350T 1S	S350Q	S350Q 4S	S350Q 1S
Continuous Force <sup>1</sup>	104N (23lbs)		148N (33lbs)		190N (43lbs)		
Continuous Current <sup>1</sup>	1.5Arms	3Arms	1.5Arms	4.5Arms	2.7Arms	1.4Arms	5.4Arms
Acceleration Force <sup>2</sup>	416N (94lbs)		592N (133lbs)		760N (171lbs)		
Acceleration Current <sup>2</sup>	6.0Arms	12Arms	6.0Arms	18Arms	11Arms	5.4Arms	22Arms
Force Constant (K <sub>f</sub> )	69N/Arms (15.5lbs/amp)	35N/Arms (7.86lbs/amp)	99N/Arms (22.18lbs/amp)	33N/Arms (7.39lbs/amp)	70N/Arms (15.8lbs/amp)	141N/Arms (31.8lbs/amp)	35N/Arms (7.9lbs/amp)
Back EMF (K <sub>e</sub> )	23V/m/s (0.59V/in/s)	12V/m/s (0.31V/in/s)	33V/m/s (0.84V/in/s)	11V/m/s (0.28V/in/s)	23V/m/s (0.58V/in/s)	47V/m/s (1.19V/in/s)	12V/m/s (0.3V/in/s)
Resistance 25°C, <sup>3</sup>	14Ω	3.5Ω	20Ω	2.2Ω	6.9Ω	28Ω	1.7Ω
Inductance <sup>3</sup>	22mH	5.5mH	33mH	3.7mH	11mH	44mH	2.7mH
Electric Time Constant	1.58ms		1.63ms		1.58ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	18.66N√W		21.95N√W		26.79N√W		
Magnetic Pitch (North-North)	120mm (4.72in)						

Is this the proper Linear Shaft Motor for your application? Use our **SMART sizing program** to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S350D	S350T	S350Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>c</sub> )	3.5°C/W (38.3°F/W)	2.4°C/W (36.3°F/W)	2.2°C/W (36°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 25°C.

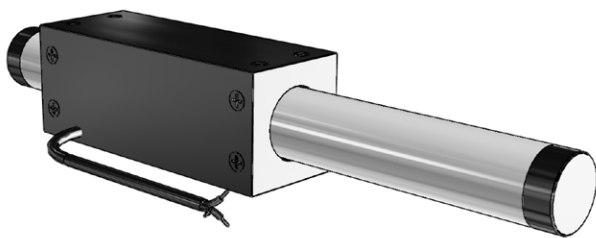

### Bus Voltage

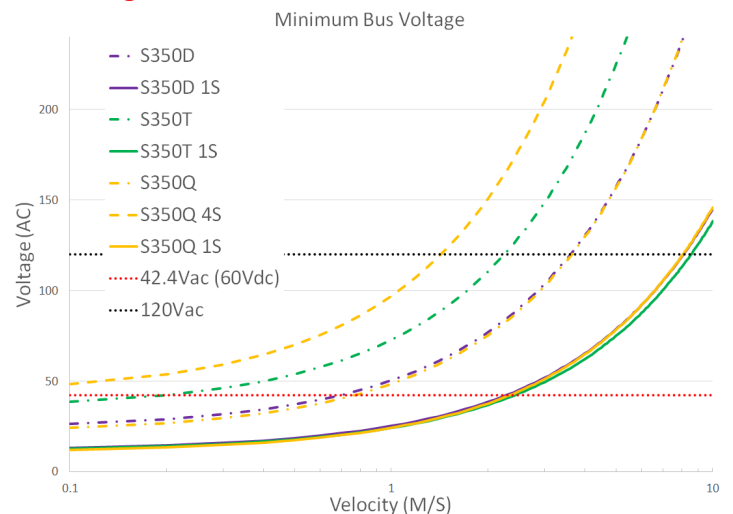

### Part Numbering System

S — Shaft Size 350

Forcer Size (A) — X

Parallel Option — XX

Usable Stroke (S) — XXXXst

Options — XX

Options — XX

D: Double (2) windings  
T: Triple (3) windings  
Q: Quadruple (4) windings


Blank: Single Motor  
PL: Parallel Motors

100-2000mm

ST: Standard  
WP: Water Resistant  
HA: Digital Hall Effect  
CE: CE type motor  
FG: Frame Ground

Blank: Standard  
FO: Forcer Only  
SO: Shaft Only

Forcer Specs	S350D	S350T	S350Q
Forcer Length (A)	160mm (6.3in)	220mm (8.7in)	280mm (11.0in)
Forcer Width	60mm (2.36in)		
Forcer Screw Pitch (P)	140mm (5.5in)	200mm (7.9in)	260mm (10.2in)
Forcer Weight	1.3kg (2.9lbs)	1.9kg (4.2lbs)	2.4kg (5.3lbs)
Gap	1.00mm (0.04in)		

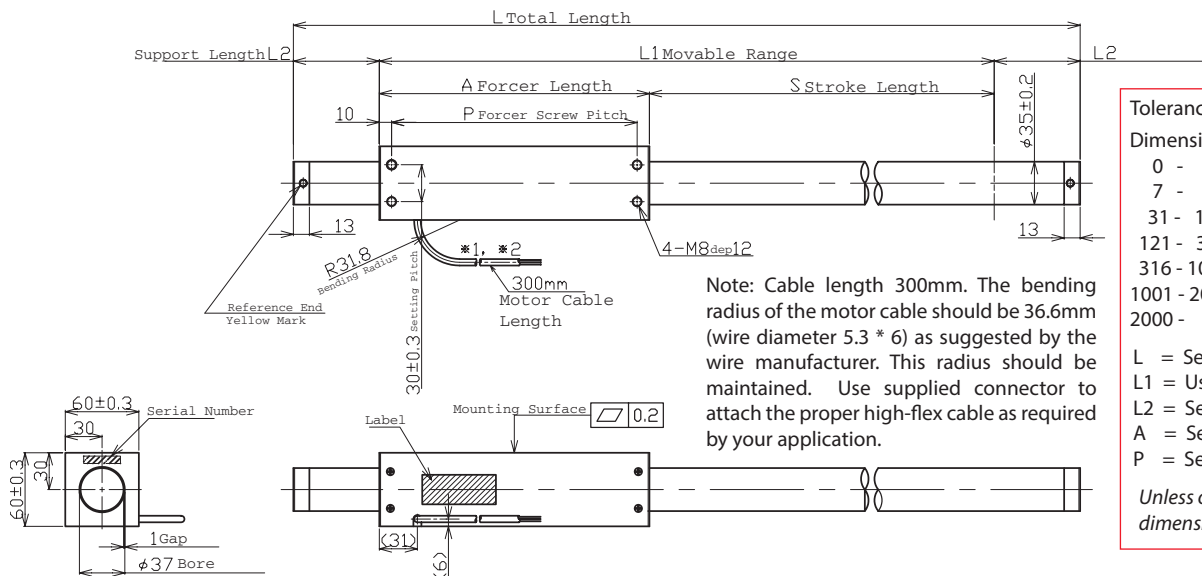

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 5.3 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.


Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

### Hall Effect Specs

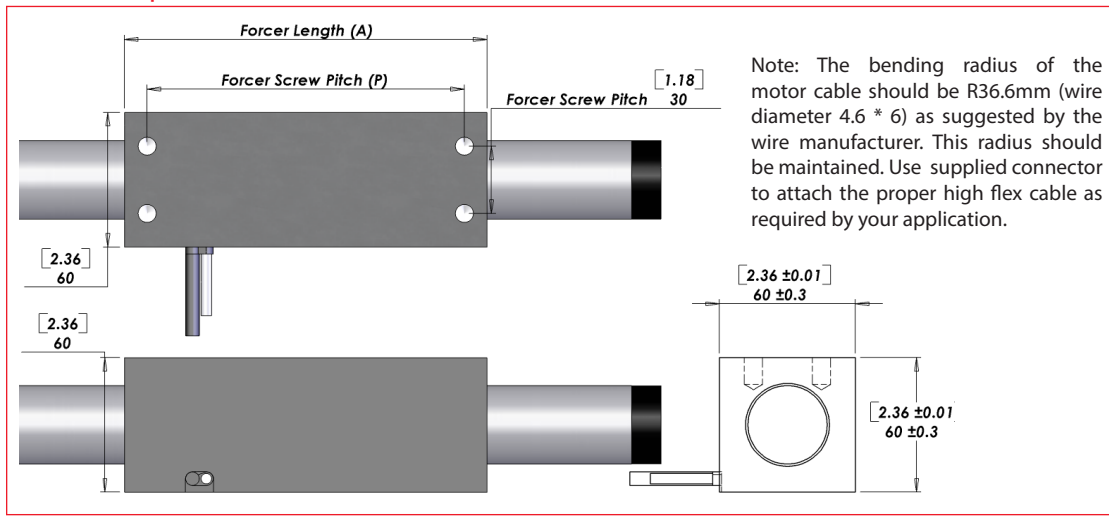

Note: The bending radius of the motor cable should be R36.6mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high flex cable as required by your application.

#### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high-flex cable as required by your application.

### Standard Lead Wire

Wire Type	UL 2464FA
Wire AWG	20
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

### CE Option - CE Type Lead Wire

Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).

Ground Wire	CE
Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

### Forcer Spacing Distance

Spec	S350T	S350Q
Forcer Spacing Distance	20mm	
Pole (N/S) Distance	60mm	
Forcer Length	220mm	280mm
Flip Forcers	No	Yes

Tandem S350D forcers are possible, but are equivalent to one (1) S350Q forcer and thus are not listed above.

### Tandem Forcer



Forcer Spacing Distance  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
www.electromate.com  
sales@electromate.com

## Shaft Length (L)

Stroke	S350D	S350T	S350Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	410mm (16.1in)	470mm (18.5in)	530mm (20.9in)
200	460mm (18.1in)	520mm (20.5in)	580mm (22.8in)
250	510mm (20.1in)	570mm (22.4in)	630mm (24.8in)
300	560mm (22in)	620mm (24.4in)	680mm (26.8in)
350	610mm (24in)	670mm (26.4in)	730mm (28.7in)
400	660mm (26in)	720mm (28.3in)	780mm (30.7in)
450	710mm (28in)	770mm (30.3in)	830mm (32.7in)
500	760mm (29.9in)	820mm (32.3in)	880mm (34.6in)
550	810mm (31.9in)	870mm (34.3in)	930mm (36.6in)
600	860mm (33.9in)	920mm (36.2in)	980mm (38.6in)
650	910mm (35.8in)	970mm (38.2in)	1030mm (40.6in)
700	960mm (37.8in)	1020mm (40.2in)	1080mm (42.5in)
750	1010mm (39.8in)	1070mm (42.1in)	1130mm (44.5in)
800	1100mm (43.3in)	1160mm (45.7in)	1220mm (48in)
850	1150mm (45.3in)	1210mm (47.6in)	1270mm (50in)
900	1200mm (47.2in)	1260mm (49.6in)	1320mm (52in)
950	1250mm (49.2in)	1310mm (51.6in)	1370mm (53.9in)
1000	1300mm (51.2in)	1360mm (53.5in)	1420mm (55.9in)
1050	1350mm (53.1in)	1410mm (55.5in)	1470mm (57.9in)
1100	1400mm (55.1in)	1460mm (57.5in)	1520mm (59.8in)
1150	1450mm (57.1in)	1510mm (59.4in)	1570mm (61.8in)
1200	1500mm (59.1in)	1560mm (61.4in)	1620mm (63.8in)
1250	1550mm (61in)	1610mm (63.4in)	1670mm (65.7in)
1300	1600mm (63in)	1660mm (65.4in)	1720mm (67.7in)
1350	1650mm (65in)	1710mm (67.3in)	1770mm (69.7in)
1400	1700mm (66.9in)	1760mm (69.3in)	1820mm (71.7in)
1450	1750mm (68.9in)	1810mm (71.3in)	1870mm (73.6in)
1500	1800mm (70.9in)	1860mm (73.2in)	1920mm (75.6in)
1550	1910mm (75.2in)	1970mm (77.6in)	2030mm (79.9in)
1600	1960mm (77.2in)	2020mm (79.5in)	2080mm (81.9in)
1650	2010mm (79.1in)	2070mm (81.5in)	2130mm (83.9in)
1700	2060mm (81.1in)	2120mm (83.5in)	2180mm (85.8in)
1750	2110mm (83.1in)	2170mm (85.4in)	2230mm (87.8in)
1800	2160mm (85in)	2220mm (87.4in)	2280mm (89.8in)
1850	2210mm (87in)	2270mm (89.4in)	2330mm (91.7in)
1900	2260mm (89in)	2320mm (91.3in)	2380mm (93.7in)
1950	2310mm (90.9in)	2370mm (93.3in)	2430mm (95.7in)
2000	2360mm (92.9in)	2420mm (95.3in)	2480mm (97.6in)

## Shaft Mass

Stroke	S350D	S350T	S350Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	2.7kg (6lb)	3.1kg (6.8lb)	3.5kg (7.7lb)
200	3kg (6.7lb)	3.4kg (7.6lb)	3.8kg (8.4lb)
250	3.4kg (7.4lb)	3.8kg (8.3lb)	4.2kg (9.2lb)
300	3.7kg (8.1lb)	4.1kg (9lb)	4.5kg (9.9lb)
350	4kg (8.9lb)	4.4kg (9.8lb)	4.8kg (10.6lb)
400	4.4kg (9.6lb)	4.8kg (10.5lb)	5.1kg (11.4lb)
450	4.7kg (10.3lb)	5.1kg (11.2lb)	5.5kg (12.1lb)
500	5kg (11.1lb)	5.4kg (11.9lb)	5.8kg (12.8lb)
550	5.3kg (11.8lb)	5.7kg (12.7lb)	6.1kg (13.5lb)
600	5.7kg (12.5lb)	6.1kg (13.4lb)	6.5kg (14.3lb)
650	6kg (13.2lb)	6.4kg (14.1lb)	6.8kg (15lb)
700	6.3kg (14lb)	6.7kg (14.8lb)	7.1kg (15.7lb)
750	6.7kg (14.7lb)	7.1kg (15.6lb)	7.5kg (16.4lb)
800	7.3kg (16lb)	7.7kg (16.9lb)	8.1kg (17.8lb)
850	7.6kg (16.7lb)	8kg (17.6lb)	8.4kg (18.5lb)
900	7.9kg (17.5lb)	8.3kg (18.3lb)	8.7kg (19.2lb)
950	8.3kg (18.2lb)	8.6kg (19.1lb)	9kg (19.9lb)
1000	8.6kg (18.9lb)	9kg (19.8lb)	9.4kg (20.7lb)
1050	8.9kg (19.6lb)	9.3kg (20.5lb)	9.7kg (21.4lb)
1100	9.2kg (20.4lb)	9.6kg (21.2lb)	10kg (22.1lb)
1150	9.6kg (21.1lb)	10kg (22lb)	10.4kg (22.8lb)
1200	9.9kg (21.8lb)	10.3kg (22.7lb)	10.7kg (23.6lb)
1250	10.2kg (22.6lb)	10.6kg (23.4lb)	11kg (24.3lb)
1300	10.6kg (23.3lb)	11kg (24.2lb)	11.4kg (25lb)
1350	10.9kg (24lb)	11.3kg (24.9lb)	11.7kg (25.8lb)
1400	11.2kg (24.7lb)	11.6kg (25.6lb)	12kg (26.5lb)
1450	11.6kg (25.5lb)	11.9kg (26.3lb)	12.3kg (27.2lb)
1500	11.9kg (26.2lb)	12.3kg (27.1lb)	12.7kg (27.9lb)
1550	12.6kg (27.8lb)	13kg (28.7lb)	13.4kg (29.5lb)
1600	12.9kg (28.5lb)	13.3kg (29.4lb)	13.7kg (30.3lb)
1650	13.3kg (29.3lb)	13.7kg (30.1lb)	14.1kg (31lb)
1700	13.6kg (30lb)	14kg (30.9lb)	14.4kg (31.7lb)
1750	13.9kg (30.7lb)	14.3kg (31.6lb)	14.7kg (32.5lb)
1800	14.3kg (31.4lb)	14.7kg (32.3lb)	15.1kg (33.2lb)
1850	14.6kg (32.2lb)	15kg (33lb)	15.4kg (33.9lb)
1900	14.9kg (32.9lb)	15.3kg (33.8lb)	15.7kg (34.6lb)
1950	15.2kg (33.6lb)	15.6kg (34.5lb)	16kg (35.4lb)
2000	15.6kg (34.3lb)	16kg (35.2lb)	16.4kg (36.1lb)

Additional stroke lengths are available (up to 2120mm for S350D, and up to 2060mm for S350T). Contact Nippon Pulse for more information.

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

Your Partner In Motion Control

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:

 ELECTROMATE

Toll Free Phone (877) SERV098


Company Fax (877) SERV099

[www.electromate.com](http://www.electromate.com)

[sales@electromate.com](mailto:sales@electromate.com)

NIPPONPULSE.COM

## THM Option

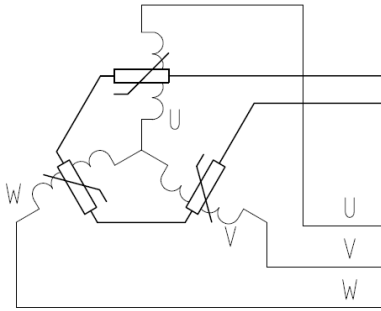

Circuit Diagram

4. Thermistor  
PTCSL20T071DBE(Vishay)

## Thermocouple

Thermal sensor  
Thermocouple K type (marked each phase name)  
Attached to the surface of inside of coil  
Length 3000mm

## Connector (Motor Cable)

Receptacle Housing	VLR-03V
Plug Housing	VLP-03V
Retainer	VLS-03V
Pin Contact	SVM-61T-P2.0
Socket Contact	SVF-61T-P2.0

To be installed by the user.

## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~750	50mm	0.00mm
751~1000	70mm	0.30mm
1001~1500	70mm	0.90mm
1501~max	100mm	1.00mm

Shaft Diameter (D) - 35mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)x2)

Stroke lengths available from 100mm to 2500mm. Contact Nippon Pulse for more information.

For assistance in selecting the best motor for your application, contact Nippon Pulse  
to speak with an applications engineer. 1-540-633-1677



Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	L350SS	L350DS	L350TS	L350QS
Continuous Force <sup>1</sup>	24N (5.4lbs)	43N (9.7lbs)	55N (12.4lbs)	74N (16.6lbs)
Continuous Current <sup>1</sup>	2.0Arms	1.8Arms	1.6Arms	
Acceleration Force <sup>2</sup>	95N (21.4lbs)	170N (38.2lbs)	222N (49.9lbs)	298N (67.0lbs)
Acceleration Current <sup>2</sup>	7.8Arms	7.3Arms	6.4Arms	
Force Constant (K <sub>f</sub> )	12N/amp (2.7lbs/amp)	23N/amp (5.2lbs/amp)	35N/amp (7.9lbs/amp)	47N/amp (10.6lbs/amp)
Back EMF (K <sub>e</sub> )	4.0V/m/s	7.7V/m/s	12V/m/s	16V/m/s
Resistance 25°C <sup>3</sup>	2.7Ω	5.3Ω	7.9Ω	11Ω
Inductance <sup>3</sup>	2.9mH	4.4mH	6.7mH	8.7mH
Electric Time Constant	1.09ms	0.83ms	0.85ms	0.82ms
Fundamental Motor Constant (K <sub>m</sub> )	7.42N√W	10.08N√W	12.28N√W	14.31N√W
Magnetic Pitch (North-North)	60mm (2.36in)			

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, contact Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	L350SS	L350DS	L350TS	L350QS
Max Phase Temperature <sup>4</sup>	135°C (275°F)			
Thermal Resistance (Coil) (K <sub>v</sub> )	11°C/W (51.8°F/W)	6.2°C/W (43.16°F/W)	5.4°C/W (41.72°F/W)	4.1°C/W (39.4°F/W)

<sup>4</sup>The standard temperature difference between the coil and the forcer surface is 40°C.

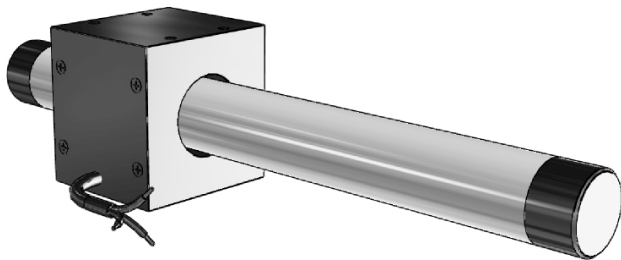

## Bus Voltage

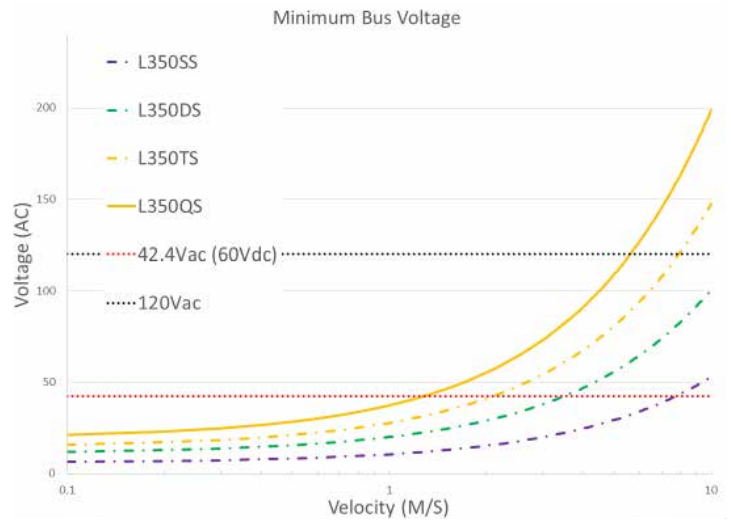

Forcer Specs	L350SS	L350DS	L350TS	L350QS
Forcer Length (A)	50mm (1.97in)	80mm (3.15in)	110mm (4.3in)	140mm (5.51in)
Forcer Width	60mm (2.36in)			
Forcer Screw Pitch (P)	40mm (1.57in)	70mm (2.76in)	100mm (3.94in)	130mm (5.12in)
Forcer Weight	0.34kg (0.75lb)	0.56kg (1.23lb)	0.78kg (1.72lb)	1.0kg (2.20lb)
Gap	3mm (0.12in)			



Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified,  
dimensions are in mm



Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

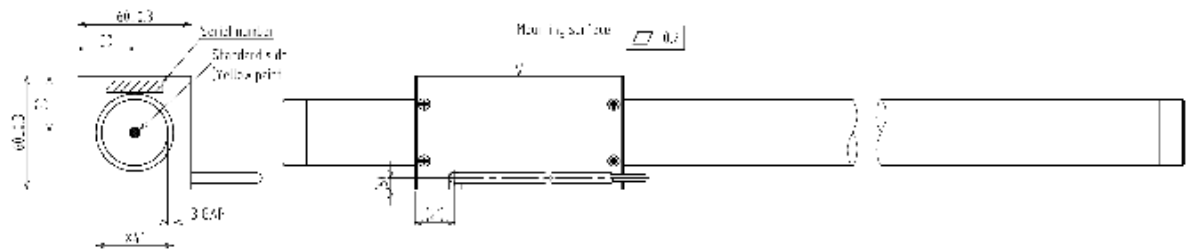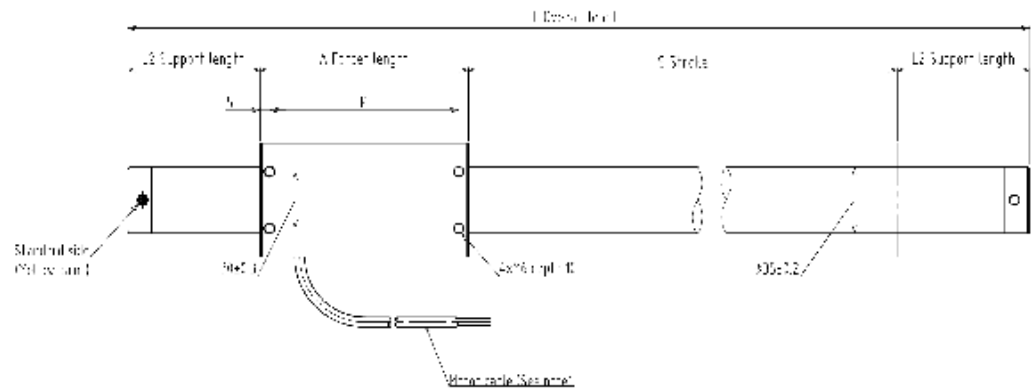


Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

[www.nipponpulse.com](http://www.nipponpulse.com)


## Linear Shaft Motor Part Numbering Guide (SS Series)

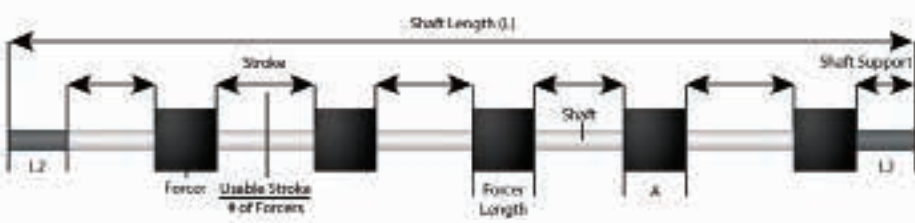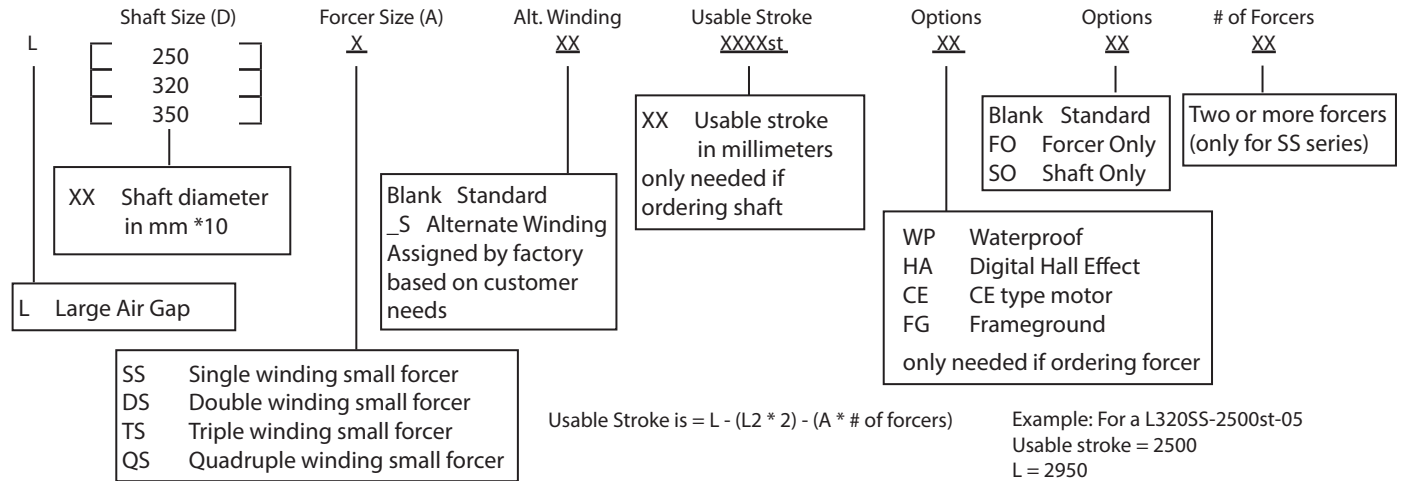

**Part Numbering Example**  
L350SS-1500st-03: Large air gap, 35mm shaft diameter, single winding, small forcer, stroke of 1500mm, three forcers

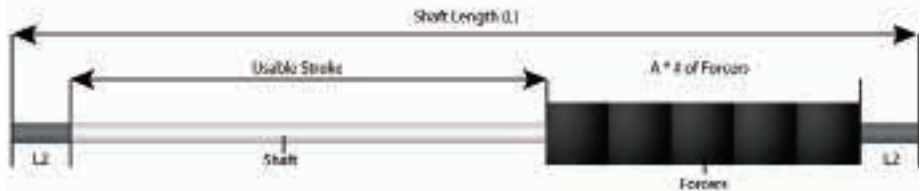


### THM Option

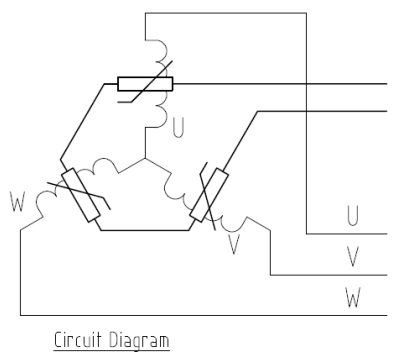

4. Thermistor  
PTCSL20T071DBE (Vishay)

### Thermocouple

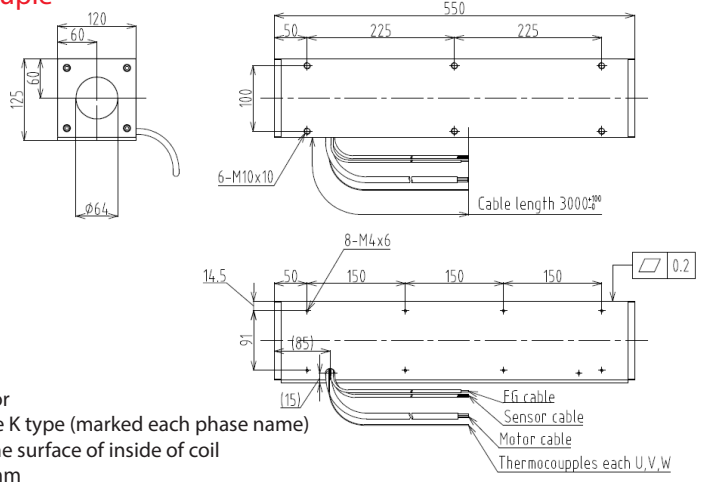

Thermal sensor  
Thermocouple K type (marked each phase name)  
Attached to the surface of inside of coil  
Length 3000mm

For assistance in selecting the best motor for your application, contact Nippon Pulse to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
**ELECTROMATE**  
Toll Free Phone (977) SERV098  
COM Fax (977) SERV099  
[www.electromate.com](http://www.electromate.com)  
sales@electromate.com

Your Partner In Motion Control

**NIPPONPULSE.COM**

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	S427D		S427T		S427Q		
	S427D	S427D 1S	S427T	S427T 1S	S427Q	S427Q 2S	S427Q S1
Continuous Force <sup>1</sup>	100N (22.5lbs)		150N (33.7lbs)		200N (45lbs)	198 (44.6lbs)	
Continuous Current <sup>1</sup>	3.0Arms	5.9Arms	3.0Arms	8.9Arms	3.0Arms	5.9Arms	12Arms
Acceleration Force <sup>2</sup>	400N (90lbs)	395N (88.9lbs)	600N (135lbs)	598N (134.6lbs)	800N (180lbs)	791 (177.98lbs)	
Acceleration Current <sup>2</sup>	12Arms	24Arms	12Arms	36Arms	12Arms	24Arms	47Arms
Force Constant (K <sub>f</sub> )	33N/Arms (7.49lbs/amp)	17N/Arms (3.86lbs/amp)	50N/Arms (11.33lbs/amp)	17N/Arms (3.85lbs/amp)	67N/Arms (14.97lbs/amp)	33N/Arms (7.37lbs/amp)	17N/Arms (3.80lbs/amp)
Back EMF (K <sub>e</sub> )	11V/m/s (0.28V/in/s)	5.6V/m/s (0.14V/in/s)	17V/m/s (0.42V/in/s)	5.6V/m/s (0.14V/in/s)	22V/m/s (0.56V/in/s)	11V/m/s (0.28V/in/s)	5.6V/m/s (0.14V/in/s)
Resistance 25°C <sup>3</sup>	2.7Ω	0.68Ω	3.9Ω	0.43Ω	5.2Ω	1.3Ω	0.33Ω
Inductance <sup>3</sup>	7.3mH	1.8mH	11mH	1.2mH	15mH	3.8mH	0.94mH
Electric Time Constant	2.70ms		2.82ms		2.88ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	20.45N√W		25.52N√W		29.51N√W	29.21N√W	
Magnetic Pitch (North-North)	180mm (7.09in)						

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled force, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S427D	S427T	S427Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>q</sub> )	4.6°C/W (36°F/W)	3.2°C/W (37.8°F/W)	2.4°C/W (36.3°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 25°C.

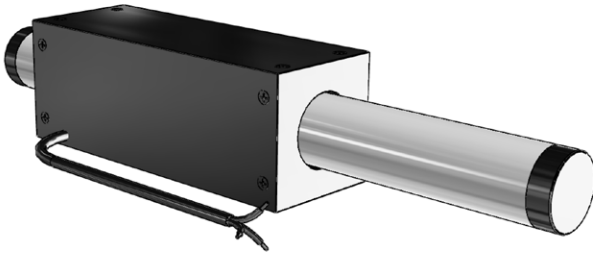

### Bus Voltage

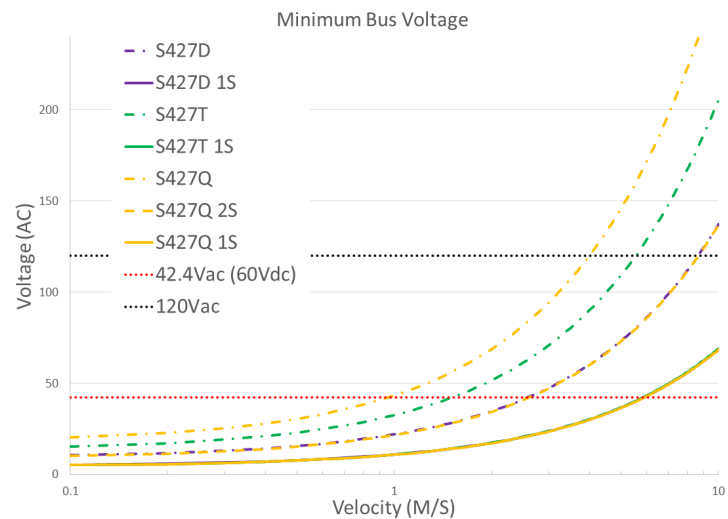

### Part Numbering System

S — Shaft Size 427      Forcer Size (A) X      Parallel Option XX      Usable Stroke (S) XXXXst      Options XX      Options XX

D: Double (2) windings      Blank: Single Motor      100-2000mm      ST: Standard      Blank: Standard

T: Triple (3) windings      PL: Parallel Motors      WP: Water Resistant      HA: Digital Hall Effect      FO: Forcer Only

Q: Quadruple (4) windings      CE: CE type motor      FG: Frame Ground      SO: Shaft Only


Forcer Specs	S427D	S427T	S427Q
Forcer Length (A)	220mm (8.66in)	310mm (12.2in)	400mm (15.75in)
Forcer Width	80mm (3.15in)		
Forcer Screw Pitch (P)	200mm (7.9in)	290mm (11.4in)	380mm (15in)
Forcer Weight	3.0kg (6.61lbs)	4.2kg (9.3lbs)	5.4kg (11.9lbs)
Gap	1.65mm (0.06in)		

Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

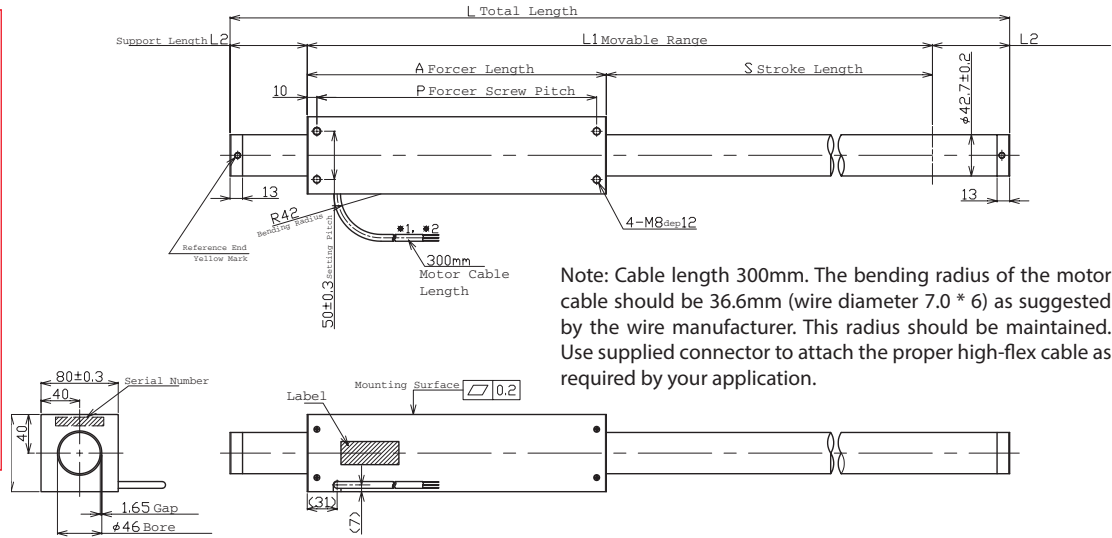

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 7.0 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

## Hall Effect Specs

Note: The bending radius of the motor cable should be R36.6mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high flex cable as required by your application.

### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high flex cable as required by your application.

## Forcer Spacing Distance

Spec	S427T	S427Q
Forcer Spacing Distance	50mm	
Pole (N/S) Distance	90mm	
Forcer Length	310mm	400mm
Flip Forcers	No	Yes

Tandem S427D forcers are possible, but are equivalent to one (1) S427Q forcer and thus are not listed above.

## Tandem Forcer



## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~550	60mm	0.00mm
551~1000	80mm	0.15mm
1001~1500	100mm	0.60mm
1501~2000	100mm	1.10mm
2001~2500	100mm	2.00mm
2501~max	100mm	2.10mm

Shaft Diameter (D) - 42.7mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)\*2)

Stroke lengths available from 100mm to 4600mm. Contact Nippon Pulse for more information.

## Connector (Motor Cable)

Receptacle Housing	VLR-03V
Plug Housing	VLP-03V
Retainer	VLS-03V
Pin Contact	SVM-61T-P2.0
Socket Contact	SVF-61T-P2.0

To be installed by the user.

## FG Type Motor Cable

The diagrams illustrate the dimensions and components of the FG Type Motor Cable. The top diagram shows the cable layout with labels: L (Total length), L2 (Support length), L1 (Movable range), A (Coil ASSY length), P (Setting pitch), 10, 13, 50-0.3 (Setting pitch), Motor cable length 300mm, 4-M8 df, and Standard side (Yellow paint mark). The bottom diagram shows the motor assembly with labels: Serial number, 80, 4.0, 80, 1.65 (Gap), 4.6, Signage of Frame ground, Rating plate, Mounting surface, Frame ground, and 0.2.

### Standard Lead Wire

Wire Type	UL 2570FA
Wire AWG	16
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

### CE Type Lead Wire Option

Ground Wire	CE
Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 21.6mm as suggested by the wire manufacturer. FG type with insulating sheet between coils and case. Meets all requirements of EN60034-1 (1998).

Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

## Shaft Length (L)

Stroke	S427D	S427T	S427Q
100	Stroke is less than the electrical cycle length.		
150	Contact Nippon Pulse.		
200	540mm (21.3in)	630mm (24.8in)	720mm (28.3in)
250	590mm (23.2in)	680mm (26.8in)	770mm (30.3in)
300	640mm (25.2in)	730mm (28.7in)	820mm (32.3in)
350	690mm (27.2in)	780mm (30.7in)	870mm (34.3in)
400	740mm (29.1in)	830mm (32.7in)	920mm (36.2in)
450	790mm (31.1in)	880mm (34.6in)	970mm (38.2in)
500	840mm (33.1in)	930mm (36.6in)	1020mm (40.2in)
550	890mm (35in)	980mm (38.6in)	1070mm (42.1in)
600	980mm (38.6in)	1070mm (42.1in)	1160mm (45.7in)
650	1030mm (40.6in)	1120mm (44.1in)	1210mm (47.6in)
700	1080mm (42.5in)	1170mm (46.1in)	1260mm (49.6in)
750	1130mm (44.5in)	1220mm (48in)	1310mm (51.6in)
800	1180mm (46.5in)	1270mm (50in)	1360mm (53.5in)
850	1230mm (48.4in)	1320mm (52in)	1410mm (55.5in)
900	1280mm (50.4in)	1370mm (53.9in)	1460mm (57.5in)
950	1330mm (52.4in)	1420mm (55.9in)	1510mm (59.4in)
1000	1380mm (54.3in)	1470mm (57.9in)	1560mm (61.4in)
1050	1470mm (57.9in)	1560mm (61.4in)	1650mm (65in)
1100	1520mm (59.8in)	1610mm (63.4in)	1700mm (66.9in)
1150	1570mm (61.8in)	1660mm (65.4in)	1750mm (68.9in)
1200	1620mm (63.8in)	1710mm (67.3in)	1800mm (70.9in)
1250	1670mm (65.7in)	1760mm (69.3in)	1850mm (72.8in)
1300	1720mm (67.7in)	1810mm (71.3in)	1900mm (74.8in)
1350	1770mm (69.7in)	1860mm (73.2in)	1950mm (76.8in)
1400	1820mm (71.7in)	1910mm (75.2in)	2000mm (78.7in)
1450	1870mm (73.6in)	1960mm (77.2in)	2050mm (80.7in)
1500	1920mm (75.6in)	2010mm (79.1in)	2100mm (82.7in)

## Shaft Mass

Stroke	S427D	S427T	S427Q
100	Stroke is less than the electrical cycle length.		
150	Contact Nippon Pulse.		
200	4.9kg (10.8lb)	5.8kg (12.8lb)	6.7kg (14.8lb)
250	5.4kg (11.9lb)	6.3kg (13.9lb)	7.2kg (15.9lb)
300	5.9kg (13lb)	6.8kg (15lb)	7.7kg (17lb)
350	6.4kg (14.1lb)	7.3kg (16.1lb)	8.2kg (18.1lb)
400	6.9kg (15.2lb)	7.8kg (17.2lb)	8.7kg (19.2lb)
450	7.4kg (16.3lb)	8.3kg (18.3lb)	9.2kg (20.3lb)
500	7.9kg (17.5lb)	8.8kg (19.4lb)	9.7kg (21.4lb)
550	8.4kg (18.6lb)	9.3kg (20.5lb)	10.2kg (22.5lb)
600	9.1kg (20lb)	10kg (22lb)	10.9kg (24lb)
650	9.6kg (21.1lb)	10.5kg (23.1lb)	11.4kg (25.1lb)
700	10.1kg (22.2lb)	11kg (24.2lb)	11.9kg (26.2lb)
750	10.6kg (23.4lb)	11.5kg (25.3lb)	12.4kg (27.3lb)
800	11.1kg (24.5lb)	12kg (26.4lb)	12.9kg (28.4lb)
850	11.6kg (25.6lb)	12.5kg (27.6lb)	13.4kg (29.5lb)
900	12.1kg (26.7lb)	13kg (28.7lb)	13.9kg (30.6lb)
950	12.6kg (27.8lb)	13.5kg (29.8lb)	14.4kg (31.8lb)
1000	13.1kg (28.9lb)	14kg (30.9lb)	14.9kg (32.9lb)
1050	13.8kg (30.4lb)	14.7kg (32.4lb)	15.6kg (34.3lb)
1100	14.3kg (31.5lb)	15.2kg (33.5lb)	16.1kg (35.4lb)
1150	14.8kg (32.6lb)	15.7kg (34.6lb)	16.6kg (36.6lb)
1200	15.3kg (33.7lb)	16.2kg (35.7lb)	17.1kg (37.7lb)
1250	15.8kg (34.8lb)	16.7kg (36.8lb)	17.6kg (38.8lb)
1300	16.3kg (35.9lb)	17.2kg (37.9lb)	18.1kg (39.9lb)
1350	16.8kg (37lb)	17.7kg (39lb)	18.6kg (41lb)
1400	17.3kg (38.1lb)	18.2kg (40.1lb)	19.1kg (42.1lb)
1450	17.8kg (39.2lb)	18.7kg (41.2lb)	19.6kg (43.2lb)
1500	18.3kg (40.3lb)	19.2kg (42.3lb)	20.1kg (44.3lb)

Additional stroke length information on next page.

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

## Shaft Length, continued


Stroke	S427D	S427T	S427Q
1550	1970mm (77.6in)	2060mm (81.1in)	2150mm (84.6in)
1600	2020mm (79.5in)	2110mm (83.1in)	2200mm (86.6in)
1650	2070mm (81.5in)	2160mm (85in)	2250mm (88.6in)
1700	2120mm (83.5in)	2210mm (87in)	2300mm (90.6in)
1750	2170mm (85.4in)	2260mm (89in)	2350mm (92.5in)
1800	2220mm (87.4in)	2310mm (90.9in)	2400mm (94.5in)
1850	2270mm (89.4in)	2360mm (92.9in)	2450mm (96.5in)
1900	2320mm (91.3in)	2410mm (94.9in)	2500mm (98.4in)
1950	2370mm (93.3in)	2460mm (96.9in)	2550mm (100.4in)
2000	2420mm (95.3in)	2510mm (98.8in)	2600mm (102.4in)
2050	2470mm (97.2in)	2560mm (100.8in)	2650mm (104.3in)
2100	2520mm (99.2in)	2610mm (102.8in)	2700mm (106.3in)
2150	2570mm (101.2in)	2660mm (104.7in)	2750mm (108.3in)
2200	2620mm (103.1in)	2710mm (106.7in)	2800mm (110.2in)
2250	2670mm (105.1in)	2760mm (108.7in)	2850mm (112.2in)
2300	2720mm (107.1in)	2810mm (110.6in)	2900mm (114.2in)
2350	2770mm (109.1in)	2860mm (112.6in)	2950mm (116.1in)
2400	2820mm (111in)	2910mm (114.6in)	3000mm (118.1in)
2450	2870mm (113in)	2960mm (116.5in)	3050mm (120.1in)
2500	2920mm (115in)	3010mm (118.5in)	3100mm (122in)
2550	2970mm (116.9in)	3060mm (120.5in)	3150mm (124in)
2600	3020mm (118.9in)	3110mm (122.4in)	3200mm (126in)
2650	3070mm (120.9in)	3160mm (124.4in)	3250mm (128in)
2700	3120mm (122.8in)	3210mm (126.4in)	3300mm (129.9in)
2750	3170mm (124.8in)	3260mm (128.3in)	3350mm (131.9in)
2800	3220mm (126.8in)	3310mm (130.3in)	3400mm (133.9in)
2850	3270mm (128.7in)	3360mm (132.3in)	3450mm (135.8in)
2900	3320mm (130.7in)	3410mm (134.3in)	3500mm (137.8in)
2950	3370mm (132.7in)	3460mm (136.2in)	3550mm (139.8in)
3000	3420mm (134.6in)	3510mm (138.2in)	3600mm (141.7in)

## Shaft Mass, continued

Stroke	S427D	S427T	S427Q
1550	18.8kg (41.4lb)	19.7kg (43.4lb)	20.6kg (45.4lb)
1600	19.3kg (42.5lb)	20.2kg (44.5lb)	21.1kg (46.5lb)
1650	19.8kg (43.6lb)	20.7kg (45.6lb)	21.6kg (47.6lb)
1700	20.3kg (44.7lb)	21.2kg (46.7lb)	22.1kg (48.7lb)
1750	20.8kg (45.8lb)	21.7kg (47.8lb)	22.6kg (49.8lb)
1800	21.3kg (46.9lb)	22.2kg (48.9lb)	23.1kg (50.9lb)
1850	21.8kg (48lb)	22.7kg (50lb)	23.6kg (52lb)
1900	22.3kg (49.1lb)	23.2kg (51.1lb)	24.1kg (53.1lb)
1950	22.8kg (50.3lb)	23.7kg (52.2lb)	24.6kg (54.2lb)
2000	23.3kg (51.4lb)	24.2kg (53.3lb)	25.1kg (55.3lb)
2050	23.8kg (52.3lb)	24.7kg (54.5lb)	25.6kg (56.4lb)
2100	24.3kg (53.6lb)	25.2kg (55.6lb)	26.1kg (57.5lb)
2150	24.8kg (54.7lb)	25.7kg (56.7lb)	26.6kg (58.6lb)
2200	25.3kg (55.8lb)	26.2kg (57.8lb)	27.1kg (59.7lb)
2250	25.8kg (56.9lb)	26.7kg (58.9lb)	27.6kg (60.8lb)
2300	26.3kg (58lb)	27.2kg (60lb)	28.1kg (61.9lb)
2350	26.8kg (59.1lb)	27.7kg (61.1lb)	28.6kg (63.1lb)
2400	27.3kg (60.2lb)	28.2kg (62.2lb)	29.1kg (64.2lb)
2450	27.8kg (61.3lb)	28.7kg (63.3lb)	29.6kg (65.3lb)
2500	28.3kg (62.4lb)	29.2kg (64.4lb)	30.1kg (66.4lb)
2550	28.8kg (63.5lb)	29.7kg (65.5lb)	30.6kg (67.5lb)
2600	29.3kg (64.6lb)	30.2kg (66.6lb)	31.1kg (68.6lb)
2650	29.8kg (65.7lb)	30.7kg (67.7lb)	31.6kg (69.7lb)
2700	30.3kg (66.8lb)	31.2kg (68.8lb)	32.1kg (70.8lb)
2750	30.8kg (67.9lb)	31.7kg (69.9lb)	32.6kg (71.9lb)
2800	31.3kg (69lb)	32.2kg (71lb)	33.1kg (73lb)
2850	31.8kg (70.1lb)	32.7kg (72.1lb)	33.6kg (74.1lb)
2900	32.3kg (71.2lb)	33.2kg (73.2lb)	34.1kg (75.2lb)
2950	32.8kg (72.3lb)	33.7kg (74.3lb)	34.6kg (76.3lb)
3000	33.3kg (73.4lb)	34.2kg (75.4lb)	35.1kg (77.4lb)

Additional stroke lengths are available. For longer strokes, see datasheet for L427 linear shaft motor. Contact Nippon Pulse for more information.

## THM Option

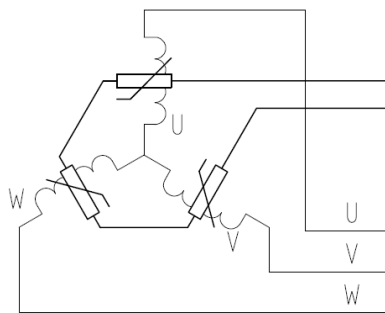


Circuit Diagram

4. Thermistor  
PTCSL20T071DBE(Vishay)

## Thermocouple

Thermal sensor  
Thermocouple K type (marked each phase name)  
Attached to the surface of inside of coil  
Length 3000mm

For assistance in selecting the best motor for your application, contact Nippon Pulse  to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:

**ELECTROMATE**  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

	S435D		S435T		S435Q		
Electrical Specs	S435D	S435D 1S	S435T	S435T 1S	S435Q	S435Q 2S	S435Q 1S
Continuous Force <sup>1</sup>	116N (26.1lbs)	115N (25.9lbs)	175N (39.2lbs)	173N (38.7lbs)	233N (52.4lbs)	230N (51.7lbs)	
Continuous Current <sup>1</sup>	3.0Arms	5.9Arms	3.0Arms	8.9Arms	3.0Arms	5.9Arms	12Arms
Acceleration Force <sup>2</sup>	464N (104lbs)	459 (102.9lbs)	700N (157lbs)	692N (155.2lbs)	932N (210lbs)	922 (207.7lbs)	
Acceleration Current <sup>2</sup>	12Arms	24Arms	12Arms	36Arms	12Arms	24Arms	47Arms
Force Constant (K <sub>f</sub> )	39N/Arms (8.7lbs/amp)	19N/Arms (4.2lbs/amp)	58N/Arms (13.1lbs/amp)	19N/Arms (4.29lbs/amp)	78N/Arms (17.4lbs/amp)	39N/Arms (8.7lbs/amp)	19N/Arms (4.24lbs/amp)
Back EMF (K <sub>e</sub> )	13V/m/s (0.33V/in/s)	6.4V/m/s (0.16V/in/s)	19V/m/s (0.49V/in/s)	6.5V/m/s (0.17V/in/s)	26V/m/s (0.66V/in/s)	13V/m/s (0.33V/in/s)	6.5V/m/s (0.17V/in/s)
Resistance 25°C, <sup>3</sup>	2.7Ω	0.68Ω	3.9Ω	0.43Ω	5.2Ω	1.3Ω	0.33Ω
Inductance <sup>3</sup>	7.3mH	1.8mH	11mH	1.2mH	15mH	3.8mH	0.94mH
Electric Time Constant	2.70ms		2.82ms		2.88ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	23.79N√W	23.53N√W	29.86N√W	29.54N√W	34.43N√W	34.06N√W	
Magnetic Pitch (North-North)	180mm (7.09in)						

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.

<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S435D	S435T	S435Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>c</sub> )	4.6°C/W (36.3°F/W)	3.2°C/W (37.8°F/W)	2.4°C/W (36.3°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 30°C.



### Bus Voltage

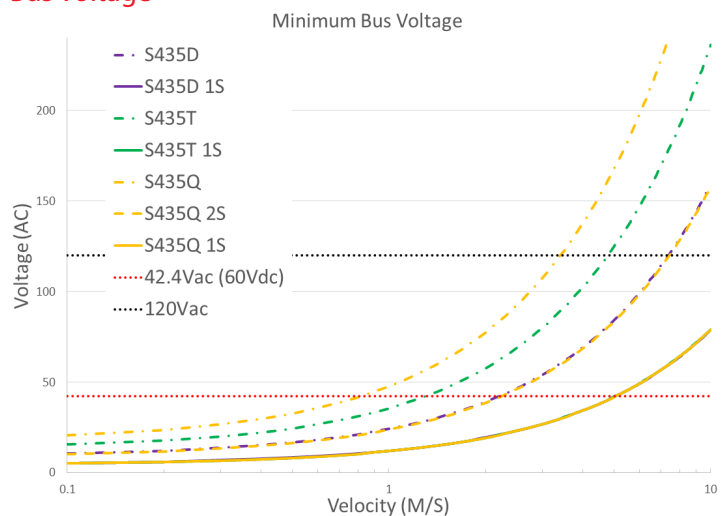


### Part Numbering System

S — Shaft Size 435      Forcer Size (A) — X      Parallel Option — XX      Usable Stroke (S) — XXXXst      Options — XX      Options — XX

D: Double (2) windings      Blank: Single Motor      200-2000mm      Blank: Standard      Blank: Standard  
T: Triple (3) windings      PL: Parallel Motors      WP: Water Resistant      FO: Forcer Only  
Q: Quadruple (4) windings      HA: Digital Hall Effect      CE: CE type motor      SO: Shaft Only



Forcer Specs	S435D	S435T	S435Q
Forcer Length (A)	220mm (8.66in)	310mm (12.2in)	400mm (15.75in)
Forcer Width	80mm (3.15in)		
Forcer Screw Pitch (P)	200mm (7.9in)	290mm (11.4in)	380mm (15in)
Forcer Weight	3.0kg (6.6lbs)	4.2kg (9.3lbs)	5.4kg (11.9lbs)
Gap	1.25mm (0.05in)		

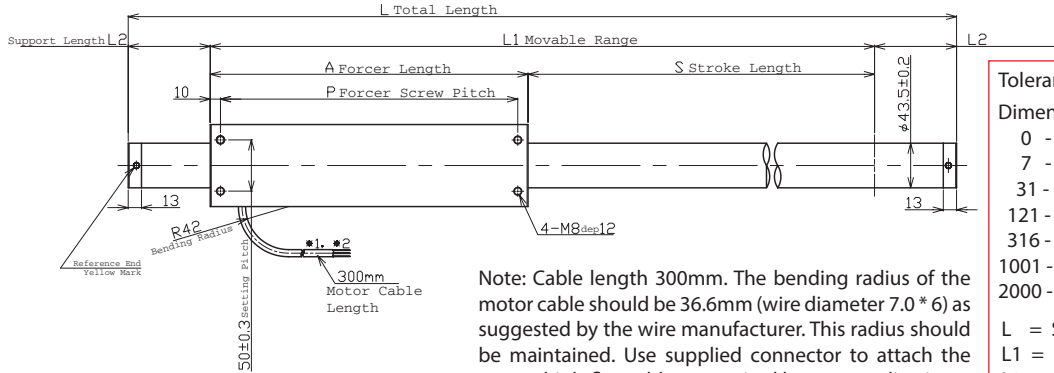



Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 7.0 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

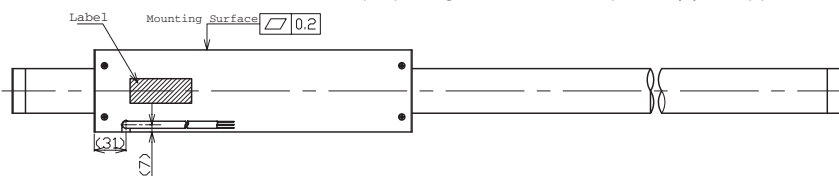

### Hall Effect Specs

Note: The bending radius of the motor cable should be R36.6mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high flex cable as required by your application.

#### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high flex cable as required by your application.

### CE Type Motor Cable

Wire Type	UL 1330	Ground Wire	<b>CE</b>
Wire AWG	24	Wire Type	UL 1330
U Phase	Red	Wire AWG	20
V Phase	White	Frame Ground	Green/Yellow
W Phase	Black		


300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer.

### Forcer Spacing Distance

Spec	S435T	S435Q
Forcer Spacing Distance	50mm	
Pole (N/S) Distance	90mm	
Forcer Length	310mm	400mm
Flip Forcers	No	Yes

Tandem S435D forcers are possible, but are equivalent to one (1) S435Q forcer and thus are not listed above.

### Tandem Forcer



## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~550	60mm	0.00mm
551~1000	80mm	0.15mm
1001~1500	100mm	0.60mm
1501~2000	100mm	1.10mm
2001~2500	100mm	2.00mm
2501~max	100mm	2.10mm

Shaft Diameter (D) - 43.5mm ±0.2

Total Length (L)=Stroke(S)  
+Forcer Length (A)  
+(Support Length (L2)x2)

Stroke lengths available  
from 100mm to 2600mm.  
Contact Nippon Pulse for  
more information.

## Connector (Motor Cable)

Receptacle Housing	VLR-03V
Plug Housing	VLP-03V
Retainer	VLS-03V
Pin Contact	SVM-61T-P2.0
Socket Contact	SVF-61T-P2.0

To be installed by the user.

## Lead Wire

Wire Type	UL 2570FA
Wire AWG	16
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

## Shaft Length (L)

Stroke	S435D	S435T	S435Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
200	540mm (21.3in)	630mm (24.8in)	720mm (28.3in)
250	590mm (23.2in)	680mm (26.8in)	770mm (30.3in)
300	640mm (25.2in)	730mm (28.7in)	820mm (32.3in)
350	690mm (27.2in)	780mm (30.7in)	870mm (34.3in)
400	740mm (29.1in)	830mm (32.7in)	920mm (36.2in)
450	790mm (31.1in)	880mm (34.6in)	970mm (38.2in)
500	840mm (33.1in)	930mm (36.6in)	1020mm (40.2in)
550	890mm (35in)	980mm (38.6in)	1070mm (42.1in)
600	980mm (38.6in)	1070mm (42.1in)	1160mm (45.7in)
650	1030mm (40.6in)	1120mm (44.1in)	1210mm (47.6in)
700	1080mm (42.5in)	1170mm (46.1in)	1260mm (49.6in)
750	1130mm (44.5in)	1220mm (48in)	1310mm (51.6in)
800	1180mm (46.5in)	1270mm (50in)	1360mm (53.5in)
850	1230mm (48.4in)	1320mm (52in)	1410mm (55.5in)
900	1280mm (50.4in)	1370mm (53.9in)	1460mm (57.5in)
950	1330mm (52.4in)	1420mm (55.9in)	1510mm (59.4in)
1000	1380mm (54.3in)	1470mm (57.9in)	1560mm (61.4in)
1050	1470mm (57.9in)	1560mm (61.4in)	1650mm (65in)
1100	1520mm (59.8in)	1610mm (63.4in)	1700mm (66.9in)
1150	1570mm (61.8in)	1660mm (65.4in)	1750mm (68.9in)
1200	1620mm (63.8in)	1710mm (67.3in)	1800mm (70.9in)
1250	1670mm (65.7in)	1760mm (69.3in)	1850mm (72.8in)
1300	1720mm (67.7in)	1810mm (71.3in)	1900mm (74.8in)
1350	1770mm (69.7in)	1860mm (73.2in)	1950mm (76.8in)
1400	1820mm (71.7in)	1910mm (75.2in)	2000mm (78.7in)
1450	1870mm (73.6in)	1960mm (77.2in)	2050mm (80.7in)
1500	1920mm (75.6in)	2010mm (79.1in)	2100mm (82.7in)
1550	1970mm (77.6in)	2060mm (81.1in)	2150mm (84.6in)
1600	2020mm (79.5in)	2110mm (83.1in)	2200mm (86.6in)
1650	2070mm (81.5in)	2160mm (85in)	2250mm (88.6in)
1700	2120mm (83.5in)	2210mm (87in)	2300mm (90.6in)
1750	2170mm (85.4in)	2260mm (89in)	2350mm (92.5in)
1800	2220mm (87.4in)	2310mm (90.9in)	2400mm (94.5in)
1850	2270mm (89.4in)	2360mm (92.9in)	2450mm (96.5in)
1900	2320mm (91.3in)	2410mm (94.9in)	2500mm (98.4in)
1950	2370mm (93.3in)	2460mm (96.9in)	2550mm (100.4in)
2000	2420mm (95.3in)	2510mm (98.8in)	2600mm (102.4in)


## Shaft Mass

Stroke	S435D	S435T	S435Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
200	5.1kg (11.2lb)	6kg (13.2lb)	7kg (15.4lb)
250	5.6kg (12.3lb)	6.6kg (14.6lb)	7.5kg (16.5lb)
300	6.1kg (13.4lb)	7.1kg (15.7lb)	8kg (17.6lb)
350	6.7kg (14.8lb)	7.6kg (16.8lb)	8.5kg (18.7lb)
400	7.2kg (15.9lb)	8.1kg (17.9lb)	9kg (19.8lb)
450	7.7kg (17lb)	8.6kg (19lb)	9.6kg (21.2lb)
500	8.2kg (18.1lb)	9.2kg (20.3lb)	10.1kg (22.3lb)
550	8.7kg (19.2lb)	9.7kg (21.4lb)	10.6kg (23.4lb)
600	9.4kg (20.7lb)	10.4kg (22.9lb)	11.3kg (24.9lb)
650	10kg (22lb)	10.9kg (24lb)	11.8kg (26lb)
700	10.5kg (23.1lb)	11.4kg (25.1lb)	12.3kg (27.1lb)
750	11kg (24.3lb)	11.9kg (26.2lb)	12.9kg (28.4lb)
800	11.5kg (25.4lb)	12.5kg (27.6lb)	13.4kg (29.5lb)
850	12kg (26.5lb)	13kg (28.7lb)	13.9kg (30.6lb)
900	12.6kg (27.8lb)	13.5kg (29.8lb)	14.4kg (31.7lb)
950	13.1kg (28.9lb)	14kg (30.9lb)	14.9kg (32.8lb)
1000	13.6kg (30lb)	14.5kg (32lb)	15.5kg (34.2lb)
1050	14.3kg (31.5lb)	15.2kg (33.5lb)	16.2kg (35.7lb)
1100	14.8kg (32.6lb)	15.7kg (34.6lb)	16.7kg (36.8lb)
1150	15.3kg (33.7lb)	16.3kg (35.9lb)	17.2kg (37.9lb)
1200	15.9kg (35.1lb)	16.8kg (37lb)	17.7kg (39lb)
1250	16.4kg (36.2lb)	17.3kg (38.1lb)	18.2kg (40.1lb)
1300	16.9kg (37.3lb)	17.8kg (39.2lb)	18.8kg (41.4lb)
1350	17.4kg (38.4lb)	18.4kg (40.6lb)	19.3kg (42.5lb)
1400	17.9kg (39.5lb)	18.9kg (41.7lb)	19.8kg (43.7lb)
1450	18.5kg (40.8lb)	19.4kg (42.8lb)	20.3kg (44.8lb)
1500	19kg (41.9lb)	19.9kg (43.9lb)	20.8kg (45.9lb)
1550	19.5kg (43lb)	20.4kg (45lb)	21.4kg (47.2lb)
1600	20kg (44.1lb)	21kg (46.3lb)	21.9kg (48.3lb)
1650	20.5kg (45.2lb)	21.5kg (47.4lb)	22.4kg (49.4lb)
1700	21.1kg (46.5lb)	22kg (48.5lb)	22.9kg (50.5lb)
1750	21.6kg (47.6lb)	22.5kg (49.6lb)	23.4kg (51.6lb)
1800	22.1kg (48.7lb)	23kg (50.7lb)	24kg (52.9lb)
1850	22.6kg (49.8lb)	23.6kg (52lb)	24.5kg (54lb)
1900	23.1kg (50.9lb)	24.1kg (53.1lb)	25kg (55.1lb)
1950	23.7kg (52.2lb)	24.6kg (54.2lb)	25.5kg (56.2lb)
2000	24.2kg (53.4lb)	25.1kg (55.3lb)	26kg (57.3lb)

Additional stroke lengths are available (up to 2180mm for S435D, 2090mm for S435T, and 2000mm for S435Q). Contact Nippon Pulse for more information.

[www.nipponpulse.com](http://www.nipponpulse.com)

## THM Option

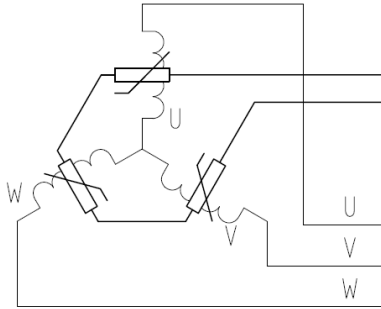


Circuit Diagram

4. Thermistor  
PTCSL20T071DBE(Vishay)

## Thermocouple

Thermal sensor  
Thermocouple K type (marked each phase name)  
Attached to the surface of inside of coil  
Length 3000mm

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse  **ELECTROMATE**  
to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
 **ELECTROMATE**  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

Electrical Specs	S500D		S500T		S500Q		
	S500D	S500D 2S	S500T	S500T 3S	S500Q	S500Q 4S	S500Q 2S
Continuous Force <sup>1</sup>	289N (65lbs)		440N (99lbs)		585N (132lbs)		
Continuous Current <sup>1</sup>	3.8Arms	1.9Arms	5.8Arms	1.9Arms	7.7Arms	1.9Arms	3.9Arms
Acceleration Force <sup>2</sup>	1156N (260lbs)	1157 (260.2lbs)	1760N (396lbs)		2340N (526lbs)		
Acceleration Current <sup>2</sup>	15.2Arms	7.6Arms	23Arms	7.7Arms	31Arms	7.7Arms	15Arms
Force Constant (K <sub>f</sub> )	76N/Arms (17.1lbs/amp)	152N/Arms (34.2lbs/amp)	76N/Arms (17lbs/amp)	228N/Arms (51lbs/amp)	76N/Arms (17lbs/amp)	304N/Arms (68lbs/amp)	152N/Arms (34lbs/amp)
Back EMF (K <sub>e</sub> )	25V/m/s (0.64V/in/s)	51V/m/s (1.31V/in/s)	25V/m/s (0.64V/in/s)	76V/m/s (1.95V/in/s)	25V/m/s (0.64V/in/s)	101V/m/s (2.59V/in/s)	51V/m/s (1.31V/in/s)
Resistance 25°C, <sup>3</sup>	4.4Ω	18Ω	3.3Ω	30Ω	2.2Ω	35Ω	8.8Ω
Inductance <sup>3</sup>	27mH	108mH	20mH	178mH	13mH	211mH	53mH
Electric Time Constant	6.14ms		6.0ms		6.0ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	36.26N√W	36.28N√W	41.76N√W		51.22N√W		
Magnetic Pitch (North-North)	180mm (7.09in)						

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S500D	S500T	S500Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>c</sub> )	1.7°C/W (3.7°F/W)	1°C/W (2.2°F/W)	0.8°C/W (1.8°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 40°C.

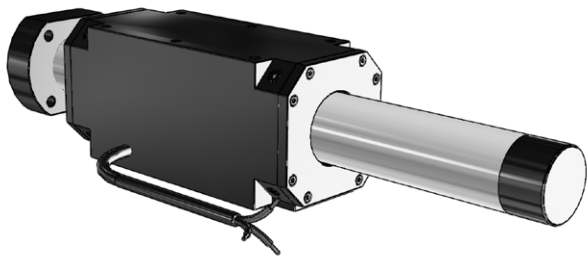

### Bus Voltage

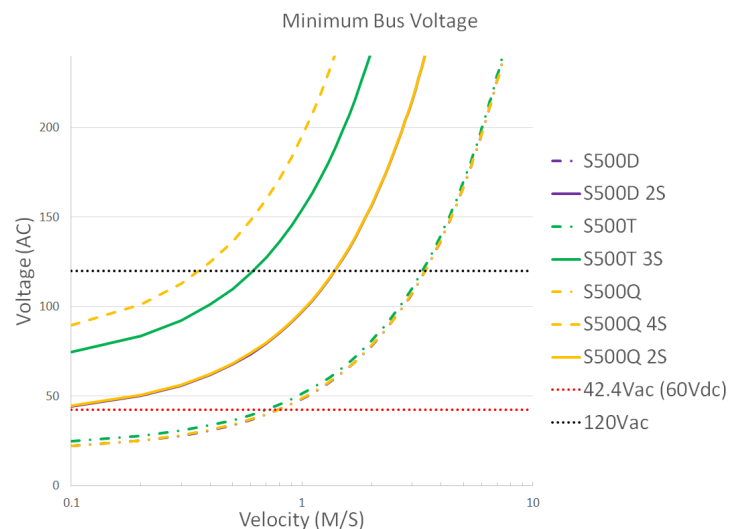

### Part Numbering System


S Shaft Size 500 Forcer Size (A) X Parallel Option XX Usable Stroke (S) XXXXst Options XX Options XX

D: Double (2) windings Blank: Single Motor 200-2000mm Blank: Standard WP: Water Resistant HA: Digital Hall Effect CE: CE type motor

T: Triple (3) windings PL: Parallel Motors Blank: Standard FO: Forcer Only SO: Shaft Only

Q: Quadruple (4) windings

Forcer Specs	S500D	S500T	S500Q
Forcer Length (A)	240mm (9.45in)	330mm (12.99in)	420mm (16.54in)
Forcer Width	100 x 105mm (3.94 x 4.13in)		
Forcer Screw Pitch (P)	80mm (3.15in)	125mm (4.9in)	170mm (6.7in)
Forcer Weight	10kg (22lbs)	13kg (28.7lbs)	15kg (33.1lbs)
Gap	1.75mm (0.07in)		

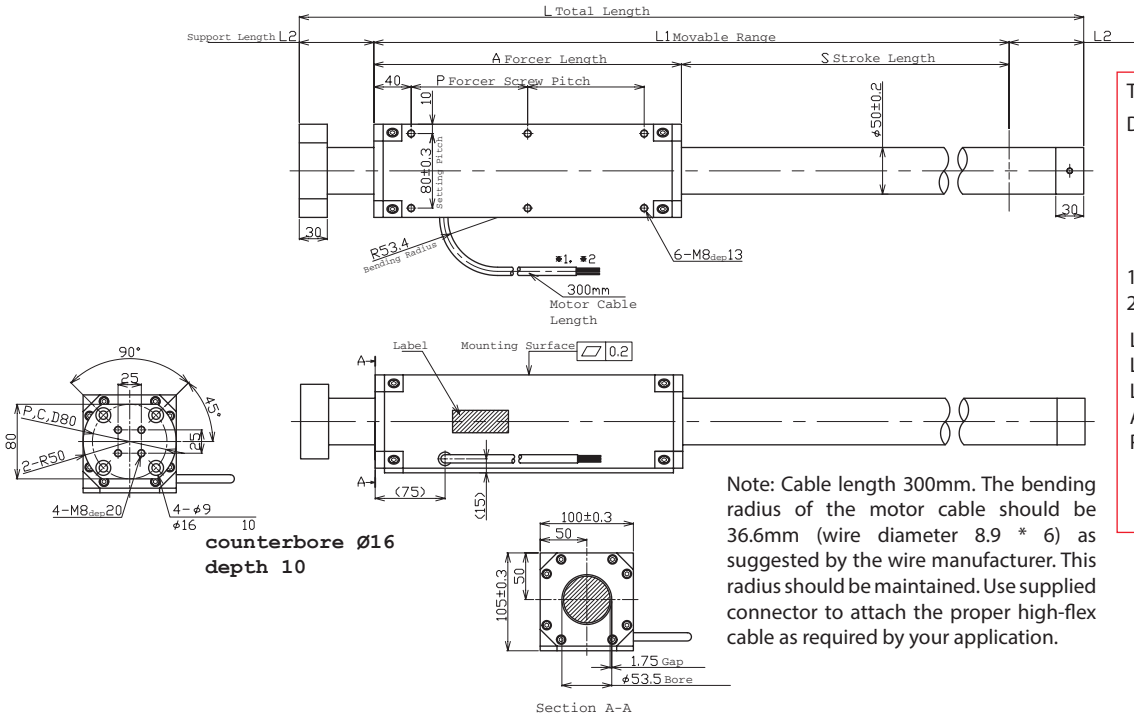

Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
 L1 = Usable Stroke + A  
 L2 = See Support Length  
 A = See Forcer Length  
 P = See Forcer Screw Pitch

*Unless otherwise specified, dimensions are in mm*

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 8.9 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Hall Effect Specs

The drawing shows the Hall Effect sensor with dimensions:
 

- Forcer Length (A)**: Overall length.
- Forcer Screw Pitch (P)**: Pitch of the screws.
- 3.15**: Dimension of the sensor housing.
- 80**: Dimension of the sensor housing.
- 3.94** (100) and **4.33** (110): Width dimensions.
- 0.39** (10) and **8.27** (210): Mounting dimensions.
- 4.13** (105): Width dimension.
- 2.20** (56): Mounting dimension.
- 4.33** (110) and **3.94** (100): Width dimensions.
- 2.20** (56) and **0.39** (10): Mounting dimensions.

Note: The bending radius of the motor cable should be R36.6mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

#### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high flex cable as required by your application.

### CE Type Motor Cable

Wire Type	UL 1330
Wire AWG	24
U Phase	Red
V Phase	White
W Phase	Black

Ground Wire	<b>CE</b>
Wire Type	UL 1330
Wire AWG	20
Frame Ground	Green/Yellow

### Connector (Motor Cable)

Receptacle Housing	VLR-03V
Plug Housing	VLP-03V
Retainer	VLS-03V
Pin Contact	SVM-61T-P2.0
Socket Contact	SVF-61T-P2.0

### Lead Wire

Wire Type	UL 2570FA
Wire AWG	14
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer.

To be installed by the user.

300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

**ELECTROMATE**  
 Toll Free Phone (877) SERV099  
 Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

## Forcer Spacing Distance

Spec	S500T	S500Q
Forcer Spacing Distance	30mm	
Pole (N/S) Distance	90mm	
Forcer Length	330mm	420mm
Flip Forcers	No	Yes

Tandem S500D forcers are possible, but are equivalent to one (1) S500Q forcer and thus are not listed above.

## Tandem Forcer



## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~750	80mm	0.00mm
800~max.	100mm	0.15mm

Shaft Diameter (D) - 50mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+  
(Support Length (L2)x2)

## Shaft Length (L)


Stroke	S500D	S500T	S500Q
100	Stroke is less than the electrical cycle length.		
150	Contact Nippon Pulse.		
200	600mm (23.6in)	690mm (27.2in)	780mm (30.7in)
250	650mm (25.6in)	740mm (29.1in)	830mm (32.7in)
300	700mm (27.6in)	790mm (31.1in)	880mm (34.6in)
350	750mm (29.5in)	840mm (33.1in)	930mm (36.6in)
400	800mm (31.5in)	890mm (35in)	980mm (38.6in)
450	850mm (33.5in)	940mm (37in)	1030mm (40.6in)
500	900mm (35.4in)	990mm (39in)	1080mm (42.5in)
550	950mm (37.4in)	1040mm (40.9in)	1130mm (44.5in)
600	1000mm (39.4in)	1090mm (42.9in)	1180mm (46.5in)
650	1050mm (41.3in)	1140mm (44.9in)	1230mm (48.4in)
700	1100mm (43.3in)	1190mm (46.9in)	1280mm (50.4in)
750	1150mm (45.3in)	1240mm (48.8in)	1330mm (52.4in)
800	1240mm (48.8in)	1330mm (52.4in)	1420mm (55.9in)
850	1290mm (50.8in)	1380mm (54.3in)	1470mm (57.9in)
900	1340mm (52.8in)	1430mm (56.3in)	1520mm (59.8in)
950	1390mm (54.7in)	1480mm (58.3in)	1570mm (61.8in)
1000	1440mm (56.7in)	1530mm (60.2in)	1620mm (63.8in)
1050	1490mm (58.7in)	1580mm (62.2in)	1670mm (65.7in)
1100	1540mm (60.6in)	1630mm (64.2in)	1720mm (67.7in)
1150	1590mm (62.6in)	1680mm (66.1in)	1770mm (69.7in)
1200	1640mm (64.6in)	1730mm (68.1in)	1820mm (71.7in)
1250	1690mm (66.5in)	1780mm (70.1in)	1870mm (73.6in)
1300	1740mm (68.5in)	1830mm (72in)	1920mm (75.6in)
1350	1790mm (70.5in)	1880mm (74in)	1970mm (77.6in)
1400	1840mm (72.4in)	1930mm (76in)	2020mm (79.5in)
1450	1890mm (74.4in)	1980mm (78in)	2070mm (81.5in)
1500	1940mm (76.4in)	2030mm (79.9in)	2120mm (83.5in)
1550	1990mm (78.3in)	2080mm (81.9in)	2170mm (85.4in)
1600	2040mm (80.3in)	2130mm (83.9in)	2220mm (87.4in)
1650	2090mm (82.3in)	2180mm (85.8in)	2270mm (89.4in)
1700	2140mm (84.3in)	2230mm (87.8in)	2320mm (91.3in)
1750	2190mm (86.2in)	2280mm (89.8in)	2370mm (93.3in)
1800	2240mm (88.2in)	2330mm (91.7in)	2420mm (95.3in)
1850	2290mm (90.2in)	2380mm (93.7in)	2470mm (97.2in)
1900	2340mm (92.1in)	2430mm (95.7in)	2520mm (99.2in)
1950	2390mm (94.1in)	2480mm (97.6in)	2570mm (101.2in)
2000	2440mm (96.1in)	2530mm (99.6in)	2620mm (103.1in)

## Shaft Mass

Stroke	S500D	S500T	S500Q
100	Stroke is less than the electrical cycle length.		
150	Contact Nippon Pulse.		
200	7.9kg (17.4lb)	9.1kg (20lb)	10.2kg (22.6lb)
250	8.5kg (18.8lb)	9.7kg (21.4lb)	10.9kg (24lb)
300	9.2kg (20.3lb)	10.4kg (22.9lb)	11.6kg (25.5lb)
350	9.8kg (21.7lb)	11kg (24.3lb)	12.2kg (26.9lb)
400	10.5kg (23.2lb)	11.7kg (25.8lb)	12.9kg (28.4lb)
450	11.2kg (24.6lb)	12.3kg (27.2lb)	13.5kg (29.8lb)
500	11.8kg (26.1lb)	13kg (28.7lb)	14.2kg (31.3lb)
550	12.5kg (27.5lb)	13.7kg (30.1lb)	14.8kg (32.7lb)
600	13.1kg (28.9lb)	14.3kg (31.6lb)	15.5kg (34.2lb)
650	13.8kg (30.4lb)	15kg (33lb)	16.1kg (35.6lb)
700	14.4kg (31.8lb)	15.6kg (34.4lb)	16.8kg (37.1lb)
750	15.1kg (33.3lb)	16.3kg (35.9lb)	17.5kg (38.5lb)
800	16.3kg (35.9lb)	17.5kg (38.5lb)	18.6kg (41.1lb)
850	16.9kg (37.3lb)	18.1kg (39.9lb)	19.3kg (42.6lb)
900	17.6kg (38.8lb)	18.8kg (41.4lb)	20kg (44lb)
950	18.3kg (40.2lb)	19.4kg (42.8lb)	20.6kg (45.4lb)
1000	18.9kg (41.7lb)	20.1kg (44.3lb)	21.3kg (46.9lb)
1050	19.6kg (43.1lb)	20.7kg (45.7lb)	21.9kg (48.3lb)
1100	20.2kg (44.6lb)	21.4kg (47.2lb)	22.6kg (49.8lb)
1150	20.9kg (46lb)	22.1kg (48.6lb)	23.2kg (51.2lb)
1200	21.5kg (47.5lb)	22.7kg (50.1lb)	23.9kg (52.7lb)
1250	22.2kg (48.9lb)	23.4kg (51.5lb)	24.6kg (54.1lb)
1300	22.8kg (50.4lb)	24kg (53lb)	25.2kg (55.6lb)
1350	23.5kg (51.8lb)	24.7kg (54.4lb)	25.9kg (57lb)
1400	24.2kg (53.3lb)	25.3kg (55.9lb)	26.5kg (58.5lb)
1450	24.8kg (54.7lb)	26kg (57.3lb)	27.2kg (59.9lb)
1500	25.5kg (56.2lb)	26.7kg (58.8lb)	27.8kg (61.4lb)
1550	26.1kg (57.6lb)	27.3kg (60.2lb)	28.5kg (62.8lb)
1600	26.8kg (59.1lb)	28kg (61.7lb)	29.1kg (64.3lb)
1650	27.4kg (60.5lb)	28.6kg (63.1lb)	29.8kg (65.7lb)
1700	28.1kg (61.9lb)	29.3kg (64.6lb)	30.5kg (67.2lb)
1750	28.8kg (63.4lb)	29.9kg (66lb)	31.1kg (68.6lb)
1800	29.4kg (64.8lb)	30.6kg (67.4lb)	31.8kg (70.1lb)
1850	30.1kg (66.3lb)	31.2kg (68.9lb)	32.4kg (71.5lb)
1900	30.7kg (67.7lb)	31.9kg (70.3lb)	33.1kg (72.9lb)
1950	31.4kg (69.2lb)	32.6kg (71.8lb)	33.7kg (74.4lb)
2000	32kg (70.6lb)	33.2kg (73.2lb)	34.4kg (75.8lb)

Additional stroke lengths are available (up to 3380mm for S500D, 3290mm for S500T, and 3200mm for S500Q). Contact Nippon Pulse for more information.

## THM Option

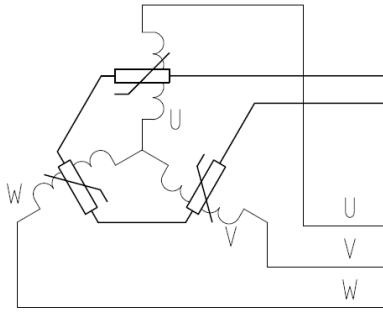

Circuit Diagram

### 4. Thermistor

PTCSL20T071DBE(Vishay)

## Thermocouple

Thermal sensor

Thermocouple K type (marked each phase name)

Attached to the surface of inside of coil

Length 3000mm

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse  
to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

Visit [nipponpulse.com](http://nipponpulse.com) to download 3D CAD drawings and 2D prints of this motor.

	S605D		S605T		S605Q		
Electrical Specs	S605D	S605D 1S	S605T	S605T 1S	S605Q	S605Q 2S	S605Q 1S
Continuous Force <sup>1</sup>	420N (94.4lbs)	414N (93.1lbs)	610N (137.1lbs)	611 (137.3lbs)	780N (175.4lbs)	781N (175.6lbs)	
Continuous Current <sup>1</sup>	8.8Arms	18Arms	8.6Arms	26Arms	8.4Arms	16.8Arms	34Arms
Acceleration Force <sup>2</sup>	1700N (382.2lbs)	1654 (371.82lbs)	2400N (539.5lbs)	2442 (548.9lbs)	3100N (696.9lbs)	3125 (702.5lbs)	
Acceleration Current <sup>2</sup>	35Arms	70Arms	34Arms	103Arms	34Arms	67Arms	134Arms
Force Constant (K <sub>f</sub> )	47N/arms (10.6lbs/amp)	24N/Arms (5.4lbs/amp)	71N/Arms (16lbs/amp)	24N/Arms (5.4lbs/amp)	93N/Arms (20.9lbs/amp)	47N/Arms (10.6lbs/amp)	23N/Arms (5.2lbs/amp)
Back EMF (K <sub>e</sub> )	16V/m/s (0.8V/in/s)	7.8V/m/s (0.39V/in/s)	24V/m/s (0.6V/in/s)	7.9V/m/s (0.2V/in/s)	31V/m/s (0.8V/in/s)	16V/m/s (0.41V/in/s)	7.8V/m/s (0.20V/in/s)
Resistance 25°C <sup>3</sup>	1.1Ω	0.28Ω	1.7Ω	0.19Ω	2.2Ω	0.55Ω	0.14Ω
Inductance <sup>3</sup>	6.5mH	1.6mH	10mH	1.1mH	13mH	3.3mH	0.81mH
Electric Time Constant	5.91ms		5.88ms		5.91ms		
Max. Rated Voltage (AC)	240V						
Fundamental Motor Constant (K <sub>m</sub> )	45.51N√W	44.81N√W	54.40N√W	54.46N√W	62.60N√W	62.70N√W	
Magnetic Pitch (North-North)	240mm (9.4in)						

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


<sup>1</sup> Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

<sup>2</sup> Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


<sup>3</sup> All winding parameters listed are measured line-to-line (phase-to-phase).

Thermal Specs	S605D	S605T	S605Q
Max Phase Temperature <sup>4</sup>	135°C (275°F)		
Thermal Resistance (Coil) (K <sub>q</sub> )	1.3°C/W (34.3°F/W)	0.9°C/W (33.6°F/W)	0.7°C/W (33.3°F/W)

<sup>4</sup> The standard temperature difference between the coil and the forcer surface is 40°C.

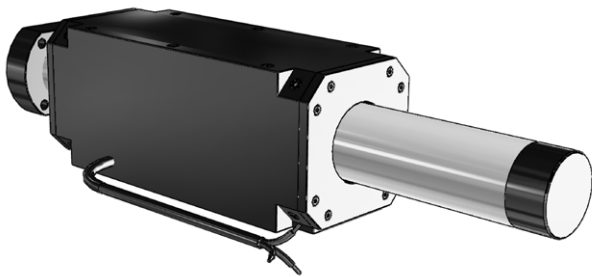

### Bus Voltage

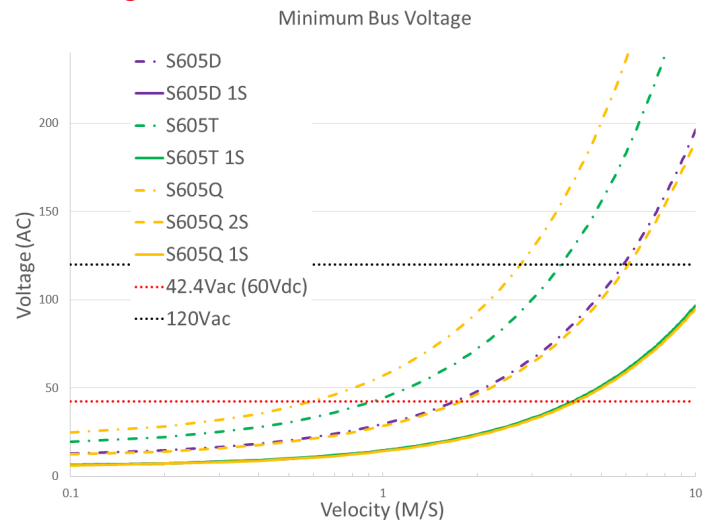

### Part Numbering System

S	Shaft Size 605	Forcer Size (A) <u>X</u>	Parallel Option <u>XX</u>	Usable Stroke (S) <u>XXXXst</u>	Options <u>XX</u>	Options <u>XX</u>
		D: Double (2) windings T: Triple (3) windings Q: Quadruple (4) windings	Blank: Single Motor PL: Parallel Motors	200-2000mm	Blank: Standard WP: Water Resistant HA: Digital Hall Effect	Blank: Standard FO: Forcer Only SO: Shaft Only




Forcer Specs	S605D	S605T	S605Q
Forcer Length (A)	310mm (12.2in)	430mm (16.9in)	550mm (21.7in)
Forcer Width	125 x 120mm (4.9 x 4.72in)		
Forcer Screw Pitch (P)	105mm (4.13in)	165mm (6.5in)	225mm (8.9in)
Forcer Weight	16kg (35.3lbs)	21kg (46.3lbs)	27kg (59.5lbs)
Gap	1.75mm (0.07in)		

Tolerances are as follows:

Dimension (mm)	Tolerance (mm)
0 - 6	±0.1
7 - 30	±0.2
31 - 120	±0.3
121 - 315	±0.5
316 - 1000	±0.8
1001 - 2000	±1.2
2000 -	±1.5

L = See Shaft Length  
L1 = Usable Stroke + A  
L2 = See Support Length  
A = See Forcer Length  
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

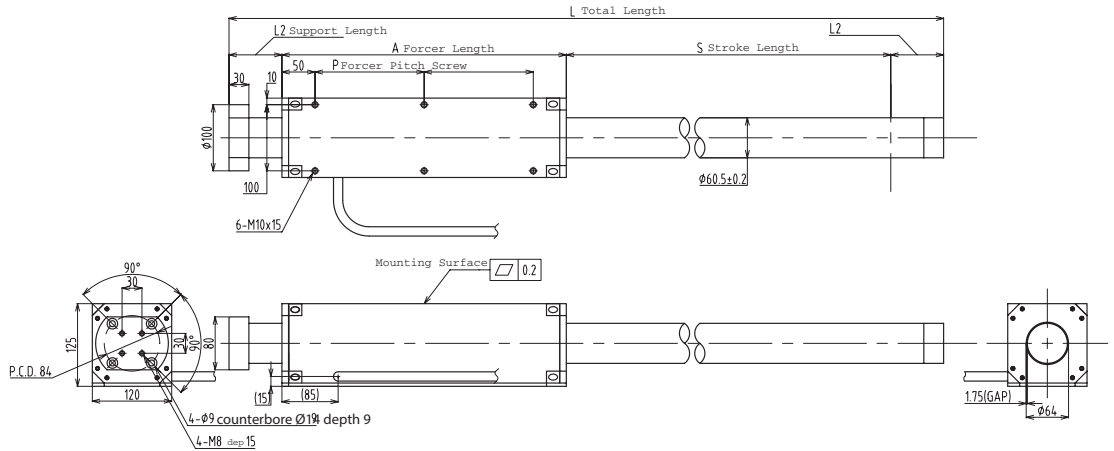

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 8.9 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

### Hall Effect Specs

Note: The bending radius of the motor cable should be R36.6mm (wire diameter 4.6 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

#### Sensor Cable Specs

Wire Type	UL 758
Wire AWG	28
VCC	White/Red
GND	White/Black
Sensor 1	Orange/Red
Sensor 2	Orange/Black
Sensor 3	Gray/Red

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 \* 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high-flex cable as required by your application.

### CE Type Motor Cable

Wire Type	UL 1330	Ground Wire	<b>CE</b>
Wire AWG	24	Wire Type	UL 1330
U Phase	Red	Wire AWG	20
V Phase	White	Frame Ground	Green/Yellow
W Phase	Black		

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer.

### Forcer Spacing Distance

Spec	S605T	S605Q
Forcer Spacing Distance	50mm	
Pole (N/S) Distance	120mm	
Forcer Length	430mm	550mm
Flip Forcers	No	Yes

Tandem S605D forcers are possible, but are equivalent to one (1) S605Q forcer and thus are not listed above.

### Tandem Forcer



## Shaft Length (L)

Stroke	S605D	S605T	S605Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
200	670mm (26.4in)	790mm (31.1in)	910mm (35.8in)
250	720mm (28.3in)	840mm (33.1in)	960mm (37.8in)
300	770mm (30.3in)	890mm (35in)	1010mm (39.8in)
350	820mm (32.3in)	940mm (37in)	1060mm (41.7in)
400	870mm (34.3in)	990mm (39in)	1110mm (43.7in)
450	920mm (36.2in)	1040mm (40.9in)	1160mm (45.7in)
500	970mm (38.2in)	1090mm (42.9in)	1210mm (47.6in)
550	1020mm (40.2in)	1140mm (44.9in)	1260mm (49.6in)
600	1070mm (42.1in)	1190mm (46.9in)	1310mm (51.6in)
650	1120mm (44.1in)	1240mm (48.8in)	1360mm (53.5in)
700	1170mm (46.1in)	1290mm (50.8in)	1410mm (55.5in)
750	1220mm (48in)	1340mm (52.8in)	1460mm (57.5in)
800	1310mm (51.6in)	1430mm (56.3in)	1550mm (61in)
850	1360mm (53.5in)	1480mm (58.3in)	1600mm (63in)
900	1410mm (55.5in)	1530mm (60.2in)	1650mm (65in)
950	1460mm (57.5in)	1580mm (62.2in)	1700mm (66.9in)
1000	1510mm (59.4in)	1630mm (64.2in)	1750mm (68.9in)
1050	1560mm (61.4in)	1680mm (66.1in)	1800mm (70.9in)
1100	1610mm (63.4in)	1730mm (68.1in)	1850mm (72.8in)
1150	1650mm (65in)	1780mm (70.1in)	1900mm (74.8in)
1200	1710mm (67.3in)	1830mm (72in)	1950mm (76.8in)
1250	1750mm (68.9in)	1880mm (74in)	2000mm (78.7in)
1300	1810mm (71.3in)	1930mm (76in)	2050mm (80.7in)
1350	1860mm (73.2in)	1980mm (78in)	2100mm (82.7in)
1400	1910mm (75.2in)	2030mm (79.9in)	2150mm (84.6in)
1450	1960mm (77.2in)	2080mm (81.9in)	2200mm (86.6in)
1500	2010mm (79.1in)	2130mm (83.9in)	2250mm (88.6in)
1550	2100mm (82.7in)	2180mm (85.8in)	2300mm (90.6in)
1600	2150mm (84.6in)	2230mm (87.8in)	2350mm (92.5in)
1650	2200mm (86.6in)	2280mm (89.8in)	2400mm (94.5in)
1700	2250mm (88.6in)	2330mm (91.7in)	2450mm (96.5in)
1750	2300mm (90.6in)	2380mm (93.7in)	2500mm (98.4in)
1800	2350mm (92.5in)	2430mm (95.7in)	2550mm (100.4in)
1850	2400mm (94.5in)	2480mm (97.6in)	2600mm (102.4in)
1900	2450mm (96.5in)	2530mm (99.6in)	2650mm (104.3in)
1950	2500mm (98.4in)	2580mm (101.6in)	2700mm (106.3in)
2000	2550mm (100.4in)	2630mm (103.5in)	2750mm (108.3in)

## Shaft Mass

Stroke	S605D	S605T	S605Q
100	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
150	Stroke is less than the electrical cycle length. Contact Nippon Pulse.		
200	13.57kg (29.9lb)	14.9kg (32.9lb)	17.3kg (38.2lb)
250	14.58kg (32.1lb)	15.9kg (35.1lb)	18.3kg (40.4lb)
300	15.59kg (34.4lb)	16.9kg (37.3lb)	19.3kg (42.6lb)
350	16.59kg (36.6lb)	17.9kg (39.5lb)	20.3kg (44.8lb)
400	17.60kg (38.8lb)	18.9kg (41.7lb)	21.3kg (47.1lb)
450	18.61kg (41lb)	19.9kg (43.9lb)	22.3kg (49.3lb)
500	19.61kg (43.2lb)	20.9kg (46.2lb)	23.4kg (51.5lb)
550	20.62kg (45.5lb)	21.9kg (48.4lb)	24.4kg (53.7lb)
600	21.62kg (47.7lb)	23kg (50.6lb)	25.4kg (55.9lb)
650	22.63kg (49.9lb)	24kg (52.8lb)	26.4kg (58.1lb)
700	23.64kg (52.1lb)	25kg (55lb)	27.4kg (60.4lb)
750	24.64kg (54.3lb)	26kg (57.3lb)	28.4kg (62.6lb)
800	26.20kg (57.8lb)	27kg (59.5lb)	29.4kg (64.8lb)
850	27.21kg (60lb)	28kg (61.7lb)	30.4kg (67lb)
900	28.22kg (62.2lb)	29kg (63.9lb)	31.4kg (69.2lb)
950	29.22kg (64.4lb)	30kg (66.1lb)	32.4kg (71.5lb)
1000	30.23kg (66.6lb)	31kg (68.3lb)	33.4kg (73.7lb)
1050	31.24kg (68.9lb)	32kg (70.6lb)	34.4kg (75.9lb)
1100	32.24kg (71.1lb)	33kg (72.8lb)	35.4kg (78.1lb)
1150	33.25kg (73.3lb)	34kg (75lb)	36.4kg (80.3lb)
1200	34.25kg (75.5lb)	35kg (77.2lb)	37.4kg (82.5lb)
1250	35.26kg (77.7lb)	36kg (79.4lb)	38.4kg (84.8lb)
1300	36.27kg (80lb)	37kg (81.7lb)	39.5kg (87lb)
1350	37.27kg (82.2lb)	38kg (83.9lb)	40.5kg (89.2lb)
1400	38.28kg (84.4lb)	39.1kg (86.1lb)	41.5kg (91.4lb)
1450	39.28kg (86.6lb)	40.1kg (88.3lb)	42.5kg (93.6lb)
1500	40.29kg (88.8lb)	41.1kg (90.5lb)	43.5kg (95.9lb)
1550	41.30kg (91.1lb)	42.1kg (92.7lb)	44.5kg (98.1lb)
1600	42.30kg (93.3lb)	43.1kg (95lb)	45.5kg (100.3lb)
1650	43.31kg (95.5lb)	44.1kg (97.2lb)	46.5kg (102.5lb)
1700	44.32kg (97.7lb)	45.1kg (99.4lb)	47.5kg (104.7lb)
1750	45.32kg (99.9lb)	46.1kg (101.6lb)	48.5kg (106.9lb)
1800	46.33kg (102.1lb)	47.1kg (103.8lb)	49.5kg (109.2lb)
1850	47.33kg (104.3lb)	48.1kg (106.1lb)	50.5kg (111.4lb)
1900	48.34kg (106.6lb)	49.1kg (108.3lb)	51.5kg (113.6lb)
1950	49.35kg (108.8lb)	50.1kg (110.5lb)	52.5kg (115.8lb)
2000	50.35kg (111lb)	51.1kg (112.7lb)	53.5kg (118lb)

Additional stroke lengths are available (up to 3000mm). Contact Nippon Pulse for more information.

## Lead Wire

Wire Type	UL 2570FA
Wire AWG	14
U Phase	Red
V Phase	White
W Phase	Black

300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

## Connector (Motor Cable)

Receptacle Housing	VLR-03V
Plug Housing	VLP-03V
Retainer	VLS-03V
Pin Contact	SVM-61T-P2.0
Socket Contact	SVF-61T-P2.0

To be installed by the user.


## Support and Bending

Stroke	Support Length (L2)	Max. Bending
0~550	80mm	0.00mm
551~750	80mm	0.15mm
751~1500	100mm	0.60mm
1501~max	120mm	1.10mm

Shaft Diameter (D) - 60.5mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)x2)

## THM Option

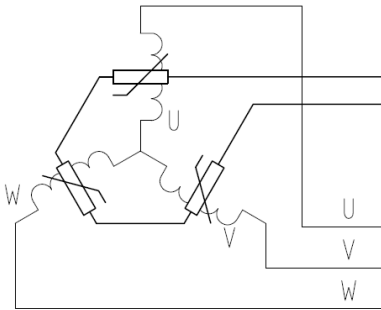

Circuit Diagram

4. Thermistor  
PTCSL20T071DBE(Vishay)

## Thermocouple


Thermal sensor

Themocouple K type (marked each phase name)

Attached to the surface of inside of coil

Length 3000mm

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse  **ELECTROMATE**  
to speak with an applications engineer. 1-540-633-1677

[www.nipponpulse.com](http://www.nipponpulse.com)

Sold & Serviced By:  
**ELECTROMATE**  
Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

# Glossary

## A

### Abbe Error

Motion errors caused by angular moments between the measuring feedback element and the point of interest.

### Abbe Offset

The linear distance between the measuring feedback element and the point of interest.

### Absolute Move

A move referenced from a fixed zero position.

### Acceleration

Change in velocity as a function of time, going from slower to faster.

### Acceleration Current

The current that can be applied for short periods of time for accelerating or decelerating. The peak current can be safely applied the Linear Shaft Motor for a maximum of 40 seconds, before the motor phases reach their maximum operating temperature when the ambient temperature is 25°C, the motor is not moving, and there is no additional heat sinking.

### Accuracy

Difference between expected position and achieved position.

## B

### Back EMF

The peak phase-to-phase voltage generated when the motor is moving.

### Backlash

The non-responsive lost motion between a drive screw and its nut that occurs at the point of change in rotation direction.

### Brushless Servomotor

A class of servomotors, which operates using electronic commutation of phase currents rather than electromechanical (brushes) commutation.

## C

### Cantilevered Load

A load that has its center of mass offset from the balance point of a bearing system.

### Closed Loop

Implementing feedback to regulated position and/or velocity with respect to commanded.

### Cogging

Changes in force, caused by magnetic "detenting" forces created by relative motion between a motor's permanent magnets and a ferrous material. The ferrous material is attracted to the magnetic poles of the permanent magnets. Cogging appears as jerkiness, especially at low speeds.

### Commutation

The switching sequence of drive voltage into motor phase windings necessary to ensure continuous motor movement. A brushed motor

relies upon brush/bar contact to switch the windings mechanically. A brushless Linear Shaft Motor requires a device that senses force position information relative to the shaft, and then feeds that data to a drive, which determines the next switching sequence.

### Commutation, Sinusoidal

The three phase currents applied to a motor closely follow the sine wave shape of the motor's natural back EMF waves, thereby providing the lowest velocity ripple and the smoothest possible motion. Sinusoidal commutation is electronically generated at the servo controller. This is a very important factor for scanning applications.

### Commutation, Trapezoidal

The three phase currents applied to a motor resemble a 9-step profile. Slight force ripple is present due to the mismatch between the three phase trapezoidal shape and the motor's back EMF sine wave profile. Trapezoidal commutation is typically generated by Hall effect sensors secured near the motor's moving coils. Trapezoidal commutation is suitable for most high-speed motion applications.

### Continuous Current

The current required to heat the motor phases to their maximum operating temperature when the ambient temperature is 25°C, the motor is not moving, and there is no cooling.

### Continuous Force

Continuous force is the force produced when the continuous current is applied to the motor. It is the product of the force constant and the continuous current. The motor is not moving and there is no cooling.

### Continuous Working Voltage

The maximum allowable continuous voltage between any two phases or between any phase and the motor safety earth.

### Counts per Meter

Counts per Meter is equal to 1 divided by the encoder resolution (Example for 50nm encoder:  
Pulses per Meter =  $1/(50 \times 10^{-9}) = 20,000,000$ )

### Coefficient of Kinetic Friction ( $\mu_k$ )

It is the proportional value of the force required to maintain motion to the normal force of the mass being moved.

### Coefficient of Static Friction ( $\mu_s$ )

It is the proportional value of the force required to overcome static friction to the normal force of the mass to be moved.

### Cosine Error

The result of a parallel misalignment between a linear bearing system and the linear feedback element.

### Current

The flow of electric charge through a medium. This charge is typically carried by moving electrons in a conductor such as wire. The SI unit for measuring the rate of flow of electric charge is the ampere, which is charge flowing through some surface at the rate of one coulomb per second.

### Current/Torque Amplifiers

Current/Torque amplifiers produce a force proportional to the command signal. The speed with which the motor will move is therefore controlled entirely by the external servo controller.

## D

### **Deceleration**

Change in velocity as a function of time, going from faster to slower.

### **Duty Cycle, Motion**

The percentage of the time in motion to the total time  
(motion time ÷ total time) x 100%.

### **Duty Motor Power**

The percentage of the application process power to a motor's continuous power limits  $[(IRMS \div ICont)^2 \times 100\%]$ . This value should not exceed 100% for a prolonged period of time.

## E

### **Electrical Time Constant**

The time taken for a step current input to the motor to reach 63.2% of its value.

### **Encoder**

A position-sensing device that translates mechanical motion into electronic signals used for monitoring position or velocity.

## F

### **Flatness**

The deviation from the theoretically perfect line of travel, and is measured as displacement in the vertical plane. (Note the frame or mounting surface to which the module or gantry system is fixed will affect the flatness of the system)

### **Friction**

Resistance to motion of two surfaces that touch.

### **Force Constant**

Force constant is the amount of force produced when 1 ampere flows through the motor.

### **Forcer**

The coil assembly of the Linear Shaft Motor. It is typically available with one to eight sets windings (see Appendix A).

## H

### **Hall Sensors**

A feedback device, which is used in some brushless servo systems to provide information for the amplifier to electronically commutate the motor. In a Linear Shaft Motor, the Hall sensors detect the position of the forcer and send a signal to the driver to switch on the next sequential winding in the forcer, which causes linear movement.

### **Hysteresis**

The non-responsive lost motion which may occur at the point of change in direction. The composite error results from many contributing factors (backlash, elasticity of structure, etc.).

## I

### **Incremental Move**

A move referenced from the current position.

### **Inductance**

The property of an electric circuit by which an electromotive force is induced in it as the result of a changing magnetic flux. This electrical characteristic is an indicator of how fast the current can rise and fall when voltage is applied to the windings.

## **Inertia**

The property of an element's mass and shape that resists changes in velocity when exposed to an outside force. The larger an object's mass, the greater its inertia and the greater the magnitude of force required to accelerate it at a given rate.

## **Intelligent Amplifiers**

Servo amplifiers which do not require external control signals in order to position the motor. Depending on the unit, they can perform very simple point to point moves up to very sophisticated moves with external synchronization and I/O handling. Generally, they can operate in either position/velocity or force control modes.

## L

### **Limits or Limit Switches**

A sensor or switch which alerts the control electronics the physical end of travel is being approached. These are safety devices at each end of the movement to prevent damage due to over travel.

### **Linear Bearing**

A support device that controls alignment and supports the load when two surfaces are loaded against each other.

## M

### **Magnetic Pitch (Pole Pitch)**

The length of one complete electrical cycle (between like magnetic poles). Example: North-to-North.

### **Maximum Phase Temperature**

The maximum operating temperature for the motor phases. It is limited to provide a safe operating temperature for the coil.

## O

### **Open Loop**

A motion system which does not utilize a feedback element.

### **Orthogonality**

The degree to which stages are aligned with their motion at right angles to one another. Motion of an X-Y system is typically 90° apart in a single plane. X-Y-Z systems are all mutually at a 90° relationship in a 3D space. The specification is typically the angle measured between the best-fit-straight-line of X-axis motion and the best-fit-straight-line of Y-axis motion.

## P

### **Parallelism**

The deviation between the perpendicular distance between axes (with one being the reference axis).

### **Peak Current**

Maximum amount of current instantaneously applied to the motor.

### **Peak Force**

The force produced when the peak current is applied to a motor. It is the product of force constant and peak current. The motor is not moving, there is no cooling and no additional heat sinking.

### **Pulses per Meter**

Pulses per Meter is equal to 1 divided by the encoder resolution divided by 4 (Example for 50nm encoder:  
Pulses per Meter =  $[1/(50 \times 10^{-9})]/4 = 5000000$ )

**Repeatability, Bi-directional**

The error from nominal when repeatedly approaching a position from opposite directions.

**Repeatability, Uni-directional**

The error from nominal when repeatedly approaching a position from the same direction.

**Resistance**

The opposition to the flow of charge through a conductor.

**Resonance**

Oscillatory behavior in a mechanical body when subjected to a periodic force occurring at its natural frequency.

**Resolution, Electrical**

The smallest increment that can be commanded by a servo system. The value results from the feedback's precision (encoder, laser, etc.) and the controller's logic multiplication factor.

**Resolution, Mechanical**

The smallest increment that can be controlled by a motion system. The value is affected by friction, static friction, driving mechanism precision, etc.

**S****Scale Error**

Errors associated with the precision of the feedback elements.

**Settling Time**

The time it takes after a move completes to settle to within a specified tolerance band (ie. to within  $\pm 1\mu\text{m}$ ).

**Servo Driver**

A brushless DC servomotor driver used to drive and control the position of a servomotor. There are many different makes and models of amplifiers available, but they tend to fall into one of three possible categories:

1. Intelligent amplifiers that have built in servo controllers
2. Velocity amplifiers capable of controlling only the velocity of the motor
3. Current/Torque amplifiers that control only the force of a linear motor (torque in a rotary motor)

**Shaft**

The magnetic assembly of the Linear Shaft Motor. It is typically a stainless steel tube and is not designed to be load bearing.

**Straightness**

The deviation from the theoretical perfect line of travel. It is measured as displacement in the horizontal plane.

**Static Friction (Stiction)**

Frictional resistance to initial motion.

**T****Thermal Resistance**

The ratio of the temperature rise of the motor as compared to the total power consumed. It is measured in  $^{\circ}\text{C}/\text{W}$ .

**V****Velocity**

A change in position as a function of time (speed).

**Velocity amplifiers**

Capable of controlling only the velocity of the motor.

**W****Weight**

The force of gravity acting on a body. Weight equals mass x acceleration due to gravity.

**Working Envelope**


The effective area available for the system to operate, without interfering with other parts of the system.

**Y****Yaw**

Angular motion of a linear stage, about an axis which is between to the bearing system and which is at right angles to the direction of travel.


# Appendix A

A typical Linear Shaft Motor consists of one forcer plus one magnet shaft. In a given Linear Shaft Motor series the magnet shafts are compatible with all forcer coil models. Note that the effective motor travel length is track length minus coil length. Non-standard shaft lengths are available in 1mm increments.

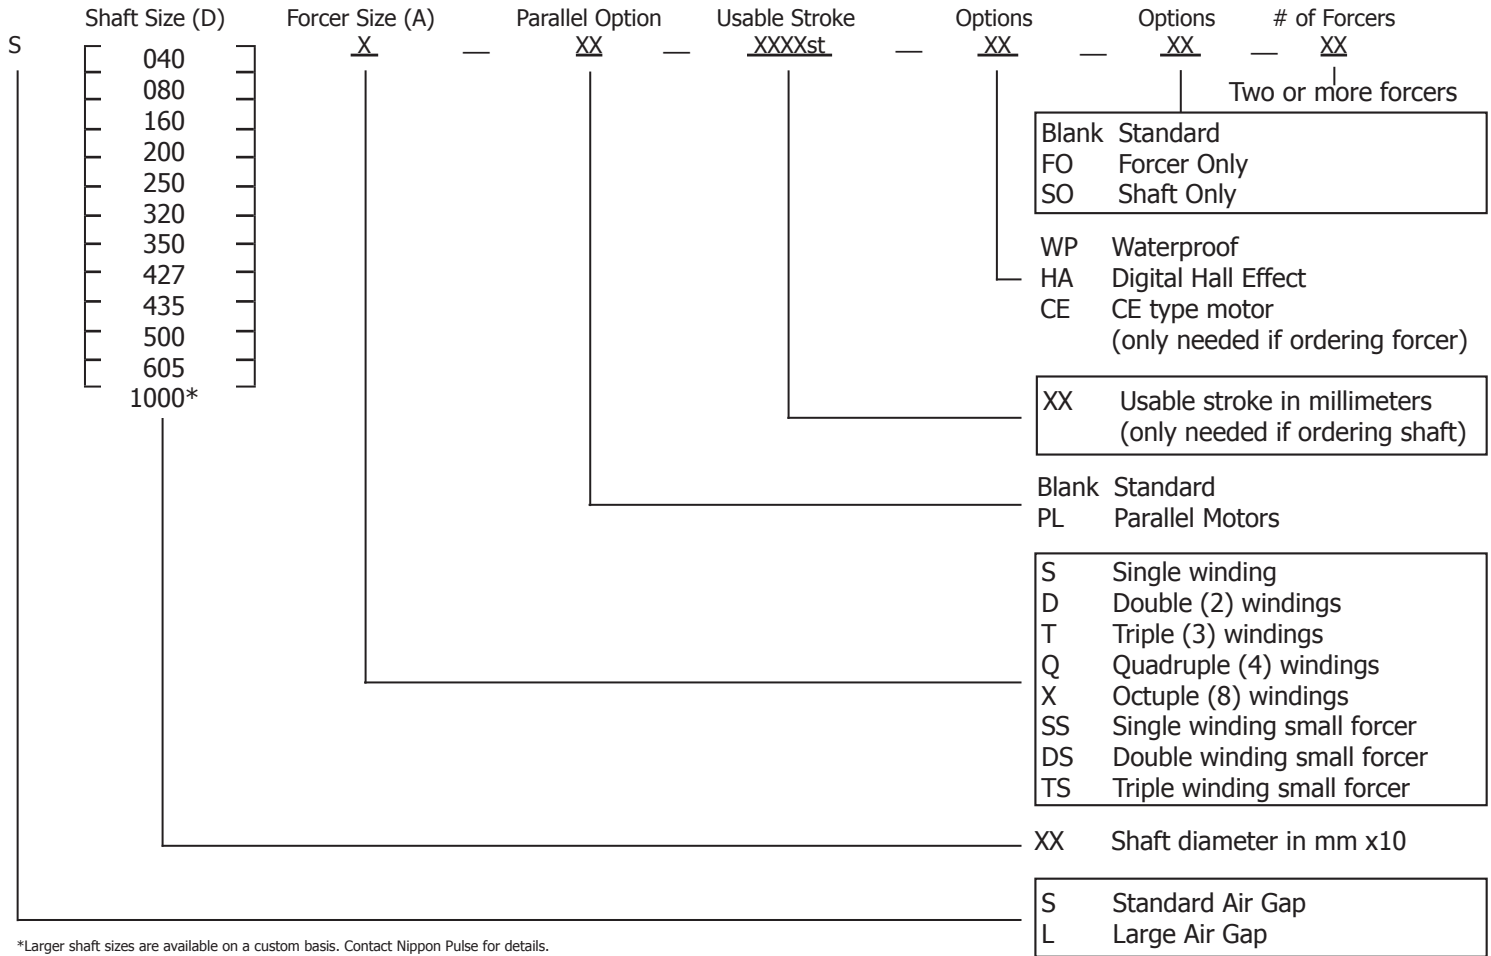

\*Larger shaft sizes are available on a custom basis. Contact Nippon Pulse for details.

Usable Stroke is =  $L - (L2 * 2) - A$

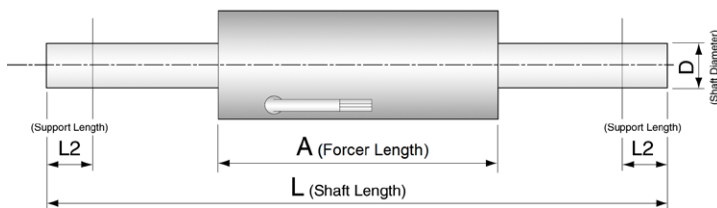

## Part Numbering Examples

1. S160T-200st: 16mm shaft diameter, triple winding, stroke of 200mm
2. S200D-250st-HA: 20mm shaft diameter, double winding, stroke of 250mm, Hall effects
3. L250Q-1000st: Large air gap, 25mm shaft diameter, quadruple winding, stroke of 1000mm
4. L320T-2500st-02: Large air gap, 32mm shaft diameter, triple winding, stroke of 2500mm, two forcers
5. S200D-FO: 20mm shaft diameter, double winding, forcer only
6. S120Q-200st-SO: 12mm diameter, quadruple winding, stroke of 200mm, shaft only
7. S350QPL-500st: 35mm shaft diameter, quadruple winding, parallel motors, stroke of 500mm
8. L350SS-1500st-03: Large air gap, 35mm shaft diameter, single winding, small forcer, stroke of 1500mm, three forcers

Example: For a S080D-250     $L = 310$     Stroke =  $310 - (10*2) - 40$   
     $L2 = 10$     Stroke =  $310 - 20 - 40$   
     $A = 40$     Stroke = 250

You can order the Linear Shaft Motor from Nippon Pulse directly at:  
 4 Corporate Dr.  
 Radford, VA 24141, USA  
 Phone: 1-540-633-1677  
 E-mail: info@nipponpulse.com  
 Web: <http://www.nipponpulse.com>

Your Partner In Motion Control

Sold & Serviced By:  
  
 Tell-Free Phone (977) SERV098  
 Toll-Free Fax (977) SERV099  
 www.elect-omate.com  
 sales@electomate.com

NIPPONPULSE.COM 95

# Appendix B

## Selection guide for Linear Shaft Motor

One of the most straightforward tasks in the design of a linear motion system is to specify a motor and drive combination that can provide the force, speed and acceleration that is required by the mechanical design. This often the most overlooked aspect of a linear motion system design. Making the motor the most costly aspect of the system, is not only from the perspective of the initial purchase cost but also from the aspect of service maintenance and energy costs.

The unique properties of the Linear Shaft Motor make its sizing for applications slightly different than that of other linear motors. Nevertheless, the proper sizing of a Linear Shaft Motor is rather straightforward. Nippon Pulse provides the SMART sizing software to assist in the selection of a proper motor and drive combination for your mechanical design. Please use the following chart to assist in organizing the operation conditions for your system.

### 1. Operation Condition

Item	Symbol	Value	Unit	Notes
Load mass	$M_L$		Kg	Mass of the moving part of your system less the mass of the motor.
Load (thrust) Force	$F_L$		N	Thrust Force is added to all segments of the motion profile. This is in addition to force needed to overcome mass, acceleration, and friction.
Run (pre-load) Friction	$F_r$		N	Pre-load Force is considered in all moving segments of the motion profile. Keep in mind all external forces that disturb the movement.
Moving Motor Mass	$M_c$		Kg	If you are not sure which motor you are going to need, start with a value of 1/10 of Load mass
Friction coefficient	$\mu$			
Incline Angle	$\alpha$		°	0° is Horizontal while 90° is Vertical
Available Voltage	V		Vac	
Available Current	A		Arms	
Max Allowable temperature			°C	

Example: Table, Encoder  
 Example of use: As the motor moves, it needs to maintain 10 lbs of force on an object.  
 Example: Cable Chain, Bearing wipers, Preloaded Guide, springs

Next is to define what motion if any your system will be making.

### 2. Motion Profile


Item	Symbol	Value	Unit	Notes
Stroke	X		mm	
Velocity	V		m/s	
Acceleration time	$T_a$		s	
Continuous time	$T_c$		s	
Deceleration time	$T_d$		s	
Settling time	$T_s$		s	
Waiting time	$T_w$		s	

Note: This application note walks you through sizing with only one segment. It is recommended that for the best sizing of a Linear Shaft Motor, a complete cycle should be used for sizing. Stroke out and back. The NPA SMART sizing software allows for sizing with up to 6 segments.

### 3. Selection Flow

#### 1. Calculations for load condition

The chart shown here helps to calculate a load force. The frictional load of the linear guide and the resistance force of the cable carrier ( $F_r$ ) are run friction and treated as load force. For your initial calculations, it is suggested that you use 1/10 the load mass, as the value for Forcer mass ( $M_c$ ).

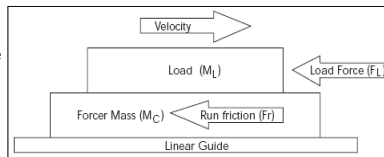

#### 2. Calculations for required thrust

You will need to calculate a thrust value for each section of the motion profile. In these equations, " $\mu$ " is the coefficient of friction on the guide. "g" is as the acceleration of gravity,  $g = 9.81 \text{ m/sec}^2$ . " $\alpha$ " is the angle of incline. For Vertical or incline moves use  $F_r$  for against gravity moves and  $F_{rd}$  for with gravity moves.

$F_1$	Force (Inertia)	$F_1 = (M_L + M_c) * (V / T_a)$
$F_r$	Force (Friction)	$F_r = (M_L + M_c) * g * [\sin(\alpha) + \mu * \cos(\alpha)] + F_r$
$F_{rd}$	Force (Friction) down	$F_{rd} = (M_L + M_c) * g * [\sin(\alpha) + \mu * \cos(\alpha) * -1] + F_r$
$F_1$	acceleration force	$F_1 = F_1 + F_L + F_r$ inertia force + external force
$F_2$	continuous force	$F_2 = F_L + F_r$ load of external force
$F_3$	deceleration force	$F_3 = F_1 - (F_L + F_r)$ inertia force - external force
$F_4$	dwell force	$F_4 = (M_L + M_c) * g * [\sin(\alpha)] + F_L$

#### 3. Temporary selection

The largest thrust value calculated in section 2, must be less than peak thrust of the selected Linear Shaft Motor. It is good practice to add 20 to 50% to the peak thrust as a safety margin. Please note that the peak thrust of the Linear Shaft Motor may vary with operation speed.

4. Confirm that  $M_c$  (forcer mass) is smaller than the value used in section 1. If it is larger, please return to section 1 to recalculate using the new  $M_c$  value.

#### 5. Confirm Effective thrust $F_{eff}$

Please confirm that effective force ( $F_{eff}$ ) is less than the continuous rated force (Frated) of the motor plus a safety factor (SF) of 30% to 50%.

6. motor whose the rated force (Frated) is met in the equation.

$$F_{eff} = \sqrt{\frac{(F_1^2 * T_a) + (F_2^2 * T_c) + (F_3^2 * T_d) + (F_4^2 * [T_s + T_w])}{(T_a + T_c + T_d + T_s + T_w)}}$$

Sold & Serviced By:

ELECTROMATE

Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

www.electromate.com

sales@electromate.com



## Useful formulas

### Amplifier Sizing

Voltage due to Back EMF	$V_{BEMF} = \text{Back EMF} \times \text{Velocity}$
Voltage due to R x I	$V_{ri} = 1.225 \times \text{Resistance} \times \text{Peak Current}$
Voltage due to Inductance	$V_L = \frac{7.695 \times \text{velocity} \times \text{inductance} \times \text{peak current}}{\text{Magnetic pitch}}$
Minimum bus voltage needed in application	$V_{bus} = 1.15 \{ (V_{BEMF} + V_n)^2 + V_L^2 \}$
Peak Current (rms value)	$I_{pmrs} = \text{Peak Current} \times 1.2$
Continuous current (rms value)	$I_{Crms} = \text{Continuous current} \times 1.2$
These formulas add a 20% safety margin for current and a 15% safety margin for voltage	

### Encoder

Encoder resolution	$E_r = \frac{\text{Scale Pitch}}{4 \times \text{Interpolation}}$
Encoder output frequency (A-B phase)	$E_{OF} = \frac{\text{Velocity} \times 10^6}{4 \times \text{Encoder resolution}}$
Encoder output frequency (sine - cosine)	$E_{OF} = \frac{\text{Velocity} \times 10^6}{\text{Scale Pitch}}$
Encoder pulses per meter	$E_{im} = \frac{1}{\text{Encoder resolution}} / 4$
Encoder counts per meter	$E_{OF} = \frac{\text{Velocity} \times 10^6}{\text{Scale Pitch}}$
Encoder lines per meter	$E_{OF} = \frac{\text{Velocity} \times 10^6}{4 \times \text{Encoder resolution}}$


### Conversions

Force			
newton	to	pound force	0.2248
newton	to	gram force	101.97
newton	to	ounce force	3.5969
pound force	to	newton	4.4482
gram force	to	newton	0.0098
ounce force	to	newton	0.2780
Length			
mm	to	inch	0.0394
mm	to	foot	0.0033
mm	to	cm	0.1
micron	to	inch	0.00003937
nanometer	to	inch	0.00000003937
meter	to	foot	3.2808
inch	to	mm	25.4
foot	to	mm	304.8
cm	to	mm	10
foot	to	meter	0.3048
inch	to	micron	25,400
inch	to	nanometer	25,400,000
Temperature			
C	to	F	1.8 then +32
F	to	C	-32 then /1.8

Mass			
kilogram	to	pound	2.2046
kilogram	to	gram	1,000
kilogram	to	ounce	35.274
pound	to	kilogram	0.4536
gram	to	kilogram	0.0010
ounce	to	kilogram	0.0283
Velocity			
mm/sec	to	inch/sec	0.0394
m/sec	to	inch/sec	39.370
inch/sec	to	mm/sec	25.4
inch/sec	to	m/sec	0.0254
mm/sec	to	m/sec	0.001
m/sec	to	mm/sec	1,000
Acceleration			
g	to	m/sec <sup>2</sup>	9.8067
g	to	mm/sec <sup>2</sup>	9806.7
g	to	inch/sec <sup>2</sup>	386.09
g	to	foot/sec <sup>2</sup>	32.144
m/sec <sup>2</sup>	to	g	0.1020
mm/sec <sup>2</sup>	to	g	0.0001
inch/sec <sup>2</sup>	to	g	0.0026
foot/sec <sup>2</sup>	to	g	0.0311

## Triangular Profile 1/2, 1/2

Accelerate to speed and decelerate back to original speed; or zero, rest, and repeat the process as needed. This is very simple and is common in applications such as pick & place.

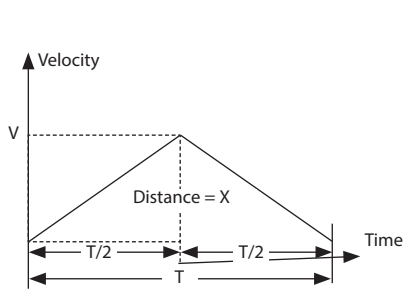


Have / Solve for	X (m) T (sec)	V (m/sec) T (sec)	A (m/sec <sup>2</sup> ) T (sec)	A (m/sec <sup>2</sup> ) V (m/sec) X (m)
Distance X (m)		$X = (1/2) * V * T$	$X = (1/4) * A * T^2$	$X = V^2/A$
Velocity V (m/sec)	$V = 2 * (X/T)$		$V = (A * T)/2$	$V = \sqrt{A * X}$
Acceleration A (m/sec <sup>2</sup> )	$A = 4 * (X/T^2)$	$A = 2 * (V/T)$		$A = V^2/X$

## Trapezoidal Profile


Accelerate to constant speed, travel at that constant speed, and then decelerate back to original speed or zero. This is common in applications such as scanning inspection. There are two types:

### 1/3<sup>rd</sup> Trapezoidal Profile 1/3, 1/3, 1/3

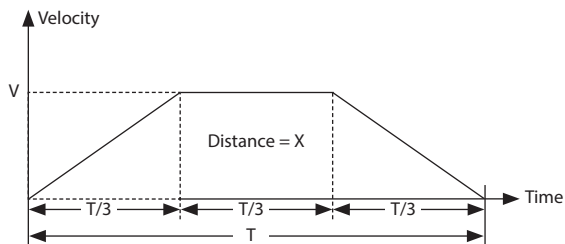

Have / Solve for	X (m) T (sec)	V (m/sec) T (sec)	A (m/sec <sup>2</sup> ) T (sec)	A (m/sec <sup>2</sup> ) V (m/sec) X (m)
Distance X (m)		$X = (2/3) * V * T$	$X = (1/4.5) * A * T^2$	$X = 2 * (V^2/A)$
Velocity V (m/sec)	$V = 1.5 * (X/T)$		$V = (A * T)/3$	$V = \sqrt{(A * X)/2}$
Acceleration A (m/sec <sup>2</sup> )	$A = 4.5 * (X/T^2)$	$A = 3 * (V/T)$		$A = 2 * (V^2/X)$

## Variable Trapezoidal Profile

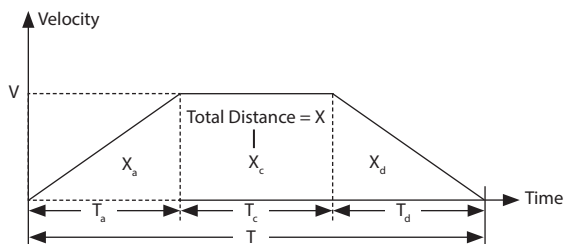

Have / Solve for	X (m) T (sec)	V (m/sec) T (sec)	A (m/sec <sup>2</sup> ) T (sec)	A (m/sec <sup>2</sup> ) V (m/sec) X (m)
Distance X (m)		$X = (V * T)/2$	$X = (A * T^2)/2$	$X = V^2/(2 * A)$
Velocity V (m/sec)	$V = (2 * X)/T$		$V = A * T$	$V = \sqrt{(2 * A * X)}$
Acceleration A (m/sec <sup>2</sup> )	$A = (2 * X)/T^2$	$A = V/T$		$A = V^2/(2 * X)$

## Motor Sizing Example

Assume you want to move horizontally a mass of 6kg point to point for a distance of 100mm (X) in 160msec including settling time ( $T_m$ ) to +/- 1 micron. Total travel is 400mm with a dwell time of 200msec needed after each move.

### Move Profile

We will assume an estimated settling time of 10msec ( $T_s$ ).

So the move cycle time ( $T_c$ ) is 160+200 = 360msec

Using previous move formula:

$$T \text{ (msec)} = T_m - (T_s)$$

$$T \text{ (msec)} = 160 - 10 = 150\text{msec}$$

We will assume an efficient trapezoidal profile (1/3, 1/3, 1/3)

Acceleration needed here (see previous move formula):

$$A = (4.5) * (0.1 * 0.15^2)$$

$$A = 20\text{m/sec}^2 \text{ (about } 2 \text{ "g")}$$

$$V = (1.5) * (0.1 / 0.15)$$

$$V = 1\text{m/sec}$$

The acceleration and deceleration time becomes (150/3) = 50msec

The time at constant speed is (150/3) = 50msec

We can estimate the acceleration force of the load only (see previously mentioned formula) at  $2g * 9.81 * 6\text{kg} = 117\text{N}$ .

Based on this we can select S350T (peak force = 592N, continuous force = 148N) assuming a coil mounting plate of 1kg.

Total moving mass: 6kg (load) + 1kg (plate) + 1.9kg (coil mass) = 8.9kg

Coil resistance = 20.2ohm, Coil Force constant 99N/Ap, Thermal Resistance 2.4°C/W, Back EMF 33Vp/m/sec,

Inductance p-p 33mH, Electrical cycle length 120mm

We assume a good set of linear bearings with  $\mu=0.005$  and 20N of friction.

Item	Symbol	Value	Unit
Load Mass	$M_L$	7	Kg
Load (thrust) Force	$F_L$	0	N
Run (pre-load) Friction	$F_r$	20	N
Moving Motor Mass	$M_c$	1.9	Kg
Friction coefficient	$\mu$	0.005	
Incline Angle	$\alpha$	0	°
Available Voltage	V	120	Vac
Available Current	I	7	Amp <sub>rms</sub>
Max. Allowable Temperature		110	°C

Item	Symbol	Value	Unit
Stroke	X	100	mm
Velocity	V	1	m/s
Acceleration Time	$T_a$	0.05	s
Continuous Time	$T_c$	0.05	s
Deceleration Time	$T_d$	0.05	s
Settling Time	$T_s$	0.01	s
Waiting Time	$T_w$	0.2	s

Friction Force:	$F_f \text{ (N)} = 8.9 * 9.81 * [\sin(0) + 0.005 * \cos(0)] + 20 = 20.4\text{N}$
Inertial Force:	$F_i \text{ (N)} = 8.9 * 20 = 178\text{N}$
Total Acceleration Force	$F_{ta} \text{ (N)} = 178 + 20.4 = 198.4\text{N}$
Total Constant Velocity Force	$F_{tcv} \text{ (N)} = 20.4\text{N}$
Total Deceleration Force	$F_{td} \text{ (N)} = 178 - 20.4 = 157.6\text{N}$
Total Dwell Force	$F_{tdw} \text{ (N)} = 0\text{N}$
RMS Force	$F_{rms} \text{ (N)} = \sqrt{[(198.4^2 * 0.05) + (20.4^2 * 0.025) + (157.6^2 * 0.05)] / 0.36}$
	$F_{rms} \text{ (N)} = 94.7\text{N}$
RMS Current	$I_{ca} = 94.7 / 99 = 0.96 \text{ Amp}_{rms}$
Peak Current	$I_{pa} = 198.4 / 99 = 2 \text{ Amp}_{rms}$
Motor Resistance Hot	$R_{hot} = 20.2 * 1.423 = 28.7\Omega$
Voltage due Back EMF	$V_{BEMF} = 33 * 1 = 33\text{Vac}$
Voltage due I*R	$V_{ir} = 1.225 * 28.7 * 2 = 70.32\text{Vac}$
Voltage due Inductance	$V_L = 7.695 * 1 * 33 * 2 / 120 = 4.23\text{Vac}$
Bus Voltage needed	$V_{bus} = 1.15 * \sqrt{[(33 + 70.3)^2 + 4.23^2]} = 118.8\text{Vac}$

More information on Linear shaft motor sizing can be found in the "Linear Shaft Motor sizing Application Note" and accompanying "LSM Sizing Example" Excel file.

# Appendix C

Any three-phase brushless servomotor drive can drive the Linear Shaft Motor. There are many different makes and models of servomotor drives available, but the ones listed below have been tested by Nippon Pulse, the driver manufacturers, and/or Nippon Pulse customers.

When selecting a servomotor drive, always confirm it is compatible with your controller and feedback system. The Linear Shaft Motor does not come with Hall effect sensors in its standard configuration; they will need to be selected as an option if required by your selected drive.

The following servo drives have been tested and certified by their respective manufacturers to work with the Linear Shaft Motor series of products.

Manufacturer	Model(s)	Hall Required
Elmo Motion Control	BAS, CEL, COR, HAR, TUB, TWE, WHI (All SimplIQ Digital Drives)	NO
Hitachi	AD Series	NO

The following servo drives have been tested by their respective manufacturers to work with the Linear Shaft Motor series of products.

Manufacturer	Model(s)	Hall Required
ADVANCED Motion Controls (AMC)	DigiFlex® Performance™ series digital drivers (DPC,DPQ, DPR and DZ), DPRALTE-015B200	NO
G.E. Fanuc	*contact Fanuc for more information	
Panasonic	A4L, A5, A5L	
Performance Motion Devices (PMD)	ION	
Teknic	All 5, 6, and 7-series Eclipse	Recommended
Yaskawa	Sigma FSP	NO

The following servo drives have been tested by customers and are reported to work with the Linear Shaft Motor series of products.

Manufacturer	Model(s)	Hall Required
Allen-Bradley	Ultra 3000 servo drives, K300, K350, K6000	YES
Baldor	Mint, Flex drives	
Beckhoff	AX2003-B110-00z	NO
Copley	Xenus, Xenus Jr, Accelnet	NO
Delta Tau	P-MAC, U-MAC	NO
Emerson	Digitax, UniDrive SP	NO
Emerson	EP	YES
Technosoft	All manufactured drives	Recommended
Kollmorgen	S200, S300, S600, CD drives	NO
Parker	Compax3	NO
Servoland	SVDM 40P, SVDM 2P, SVDM 5P	NO



## EC DECLARATION OF CONFORMITY

We, GMC HILLSTONE CO., LTD., 4466-1, Daimyojin, Tomizawa, Mogami-machi, Mogami-gun, Yamagata 999-6105 Japan, declare in our sole responsibility that the following product conforms to all the relevant provisions.

Product Name : Shaft Motor

Models Covered : S080D followed by D, T or Q  
S120D followed by D, T or Q  
S160D followed by D, T or Q  
S200D followed by T or Q  
S250D followed by D, T, Q, H or X  
S320D followed by D, T, Q or X  
S427D followed by D, T or Q  
S350P

Applicable Standards : EN60034-1 (1998)

Year to begin affixing CE Marking : 2005

Signature:

Full Name:

Yoichi Ishiyama

Position:

President

Date:

28 December 2005

# Comments

Please answer the questions below and add any suggestions for improving this document.

Is the information:

Yes

No

Adequate? \_\_\_\_\_

Well organized? \_\_\_\_\_

Clearly presented? \_\_\_\_\_

Well illustrated? \_\_\_\_\_

Would you like to see more illustrations? \_\_\_\_\_

Would you like to see more text? \_\_\_\_\_

How do/did you use this document in your job? Does/Did it meet your needs?

What improvements, if any, would you like to see? Please be specific or cite examples.

---

---

---

---

Your name : \_\_\_\_\_

Your title : \_\_\_\_\_

Company name : \_\_\_\_\_

Address : \_\_\_\_\_  
\_\_\_\_\_

Remove this page from the document and fax or mail your comments to Nippon Pulse at the address below:

Nippon Pulse America, Inc.  
4 Corporate Drive  
Radford, VA 24141-5100 USA  
Fax Number: 1-540-633-1674

# Nippon Pulse

## About Nippon Pulse

Nippon Pulse provides a wide array of motion control solutions to meet the needs of its current and future customers. This includes industry-leading stepper motors, the innovative Linear Shaft Motor, controllers, drivers and networks. With several customization options, we can provide products that can be utilized in an extensive number of applications.

## Your Partner in Motion Control

At Nippon Pulse, we approach customer applications from an overall project standpoint. This enables us to provide the best electro-mechatronic solutions that help you design and build your motion control systems. Our system engineering services include complete design, engineering and manufacturing. Applications we have worked on range from various pick-and-place machines to large scale sorting and distributing systems, biomedical handling equipment, healthcare products, and more. Our sales engineers have extensive product knowledge and can help you determine the best solution for your particular motion control application.

From standard industrial sectors to the high-level electronics, Nippon Pulse optimizes development and manufacturing and provides many high-performance product groups. In order to provide the most efficient products and facilities, we are always conscious of a smooth flow from planning to design and manufacturing. This efficient flow makes it possible to create a wide variety of products which meet customers' needs.

It is essential that we provide products exceeding customer expectations, so they are able to use them with complete confidence. Maintaining excellent quality while ensuring a stable supply chain for each of our products is achieved by thorough quality control methods. These methods guarantee reliability above industry standards, even on mass-produced items, such as motors and controllers.

Whether we provide entire systems or just one motor, ensuring those products have exceeded expectations is part of our methodology. In-depth communications with the customer from the design phase through delivery and beyond installation guarantees this.


We strive to ensure all aspects of our process allow us to meet and exceed customer expectations through communication, support and by providing reliable products.

## In-House Model Shop

The Nippon Pulse model shop provides quick turnaround on prototype requests for our tin-can stepper motors. Most requests can be shipped within 24 hours, allowing you to test the product in your application before committing to a purchase order. Nippon Pulse sales engineers work closely with you to understand your project so we are able to suggest the best solution possible and get a high-quality prototype to you as quickly as possible. Nippon Pulse offers the flexibility to ship just one piece, if that is all you need, to make sure our product is the correct fit for your project. In addition to the tin-can type stepper motors, we have various linear step motors, hybrid motors, controllers, and drivers in stock for quick prototyping.

### INDUSTRIES WE SERVE

Automation  
Bio-Medical & Medical  
Equipment Manufacturing  
Instrumentation  
Machine Tooling  
OEM  
Packaging  
Pharmaceutical  
Photonics  
Semiconductor

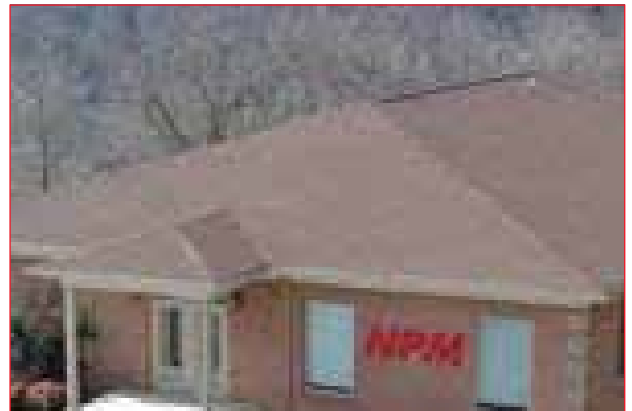

Your Partner In Motion Control

Sold & Serviced By:

 **ELECTROMATE**

Toll-Free Phone (877) SERV098

Company Fax (703) SERV099

[www.elect-mate.com](http://www.elect-mate.com)

[sales@electmate.com](mailto:sales@electmate.com)

**NIPPONPULSE.COM**

# NPM

---

4 Corporate Drive  
Radford, VA 24141 USA  
phone: 1-540-633-1677 ... fax: 1-540-633-1674  
www.nipponpulse.com ... info@nipponpulse.com

Sold & Serviced By:

 **ELECTROMATE**

Toll Free Phone (877) SERV098

Linear Shaft Motor Installation Guide | 201605  
Toll Free Fax (877) SERV099  
Copyright 2016 | Nippon Pulse | All Rights Reserved  
www.electromate.com  
sales@electromate.com