



STEPPER  
DRIVES

# 3540i Programmable Step Motor Drive

## 3540i Programmable Step Motor Indexer/Drive

**Microstepping**  
**3.5 amps, 40 VDC**

### Features

- Programmable for stand alone operation with Applied Motion's easy to use *Si Programmer™* Windows software (software and programming cable included)
- Can be operated in real time form a host PC or PLC using Applied Motion's *Si Command Language™ (SCL)*.
- Can be networked with all other *Si™* products via Applied Motion's *SiNet™* Hub
- DC bus voltage 12-42 VDC motor supply (including ripple)
- Software selectable from 0.2–3.5 amps/phase motor current
- Software selectable Step resolutions from 2,000 to 50,800 steps per revolution
- Software selectable idle current reduction 0%, 25%, 50% or 100%
- 8 user programmable inputs
- 3 optically isolated 5–24 VDC outputs
- Communication via RS232 or optional encoder/RS485 daughter board
- 140 watts of usable power
- Screw terminal connector blocks for power, motor and I/O. RJ11 for RS232 port
- MOSFET, dual H-Bridge, inaudible PWM amplifier
- 3 state, pulse width modulated current control, switching at 20–30 kHz
- Optional RS485 and encoder input board
- Optional operator terminal (MMI) either standard or backlit
- Drives 4, 6 or 8 lead size 11, 14, 17, 23 or 34 step motors
- CE and TUV compliant


### Description

The 3540i is a programming step motor driver suitable for a wide range of motion control applications. It includes a sophisticated controller integrated with a 140 watt microstepping amplifier.


The 3540i includes Applied Motion's easy to use *Si Programmer™* Windows software for the rapid development of stand-alone motion control programs. The 3540i can also be commanded in real time from a host PC or PLC, using the *Si Command Language™*.

For multi-axis applications, up to eight Applied Motion *Si™* drives (stepper or Servo) can be networked using a single *SiNet™* Hub.


The 3540i includes 8 optically isolated programmable inputs for triggering, branching, position sensing and end of travel detection. 3 optically isolated programmable outputs can send signals to other electronic devices and activate relays.

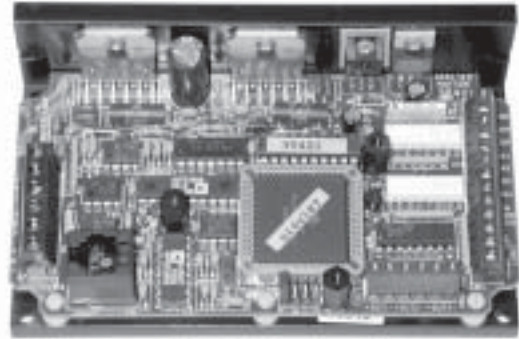

### MECHANICAL OUTLINE

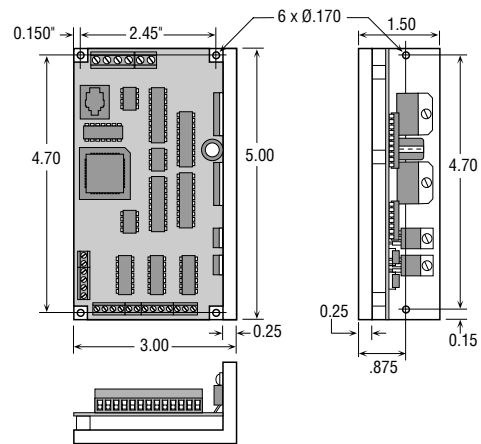

### BLOCK DIAGRAM

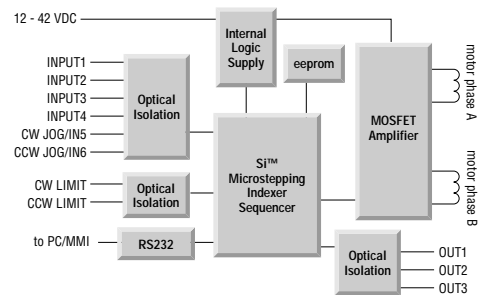

### Recommended motors for the 3540i drive:

Size 11	Size 14	Size 17	Size 23
HT11-012	5014-842	HT17-068	HT23-394
HT11-013		HT17-071	HT23-397
		HT17-075	HT23-400
Size 34			
5034-348			



# 3540i Torque Curves

