# LCA 16 Series

## **Linear Actuator**

Compact direct-drive linear motor Soft-Land capability Light weight (435g) Vacuum option Spring option

### LCA16 Series

Dimensions [mm] 60x110x16 Stroke [mm] 10 (+1/-0)


6 @ 1.5 Amp (24VDC), 13 @1.4Amp (48VDC) Peak Force [N]

Encoder Resolution [µm] 5 standard, 1.0 and 0.1 optional

SMAC's Patented 'Soft-Land' Technology Fully programmable in force, position and velocity



## **Applications**




Pick & Place

LCA16

one (877) SERV098 Free Fax (877) SERV099 www.electromate.com

De-blisterings@electromate.com

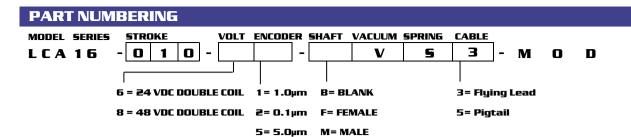


#### **SPECIFICATION**

Model	Voltage [DC]	Size: LxWxH [mm]	Stroke [mm]	Max. Force [N]	Continuous Force [N]	Force Constant [N/A]	Max. Current [Amp]	Moving Mass [kg]	Weight [kg]
LCA16-010-6	24	60x110x16	10	6	2.5	4.3	1.5	0.045	0.435
LCA16-010-8	48	60x110x16	10	13	5	6.5	1.5	0.045	0.435

C=CUSTOM

#### **DIMENSIONS (LCA 16-010-6 model)**

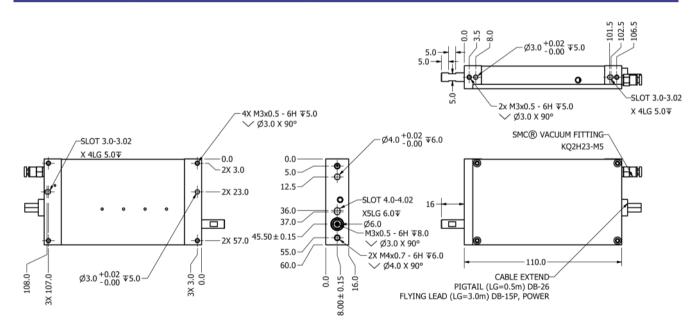

#### **Regional Distributor**

Sold & Serviced By: **ELECTROMATE** 

Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com