


UniOP eTOP507W

The UniOP eTOP Series 500W HMI products combine state-of-the-art features and top performance with an outstanding design. They are the ideal choice for all demanding HMI applications including factory and building automation. These products are a cost-effective and low-power requirement platform for delivering applications based on Microsoft Windows CE 6.0 R3.

The eTOP507W features a bright 7" TFT widescreen (16:9) display with a fully dimmable LED backlight.

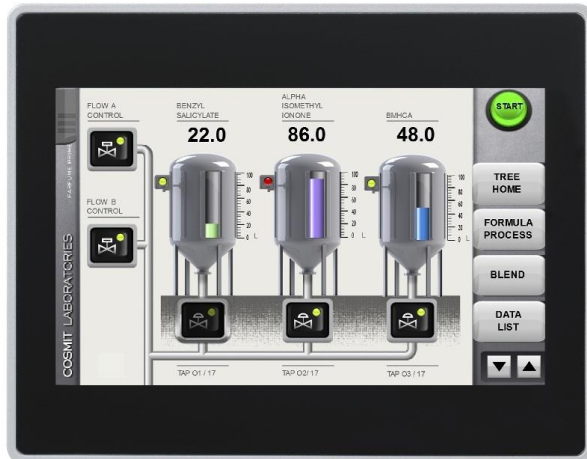

- ARM Cortex A8 600MHz CPU
- 256MB DDR RAM
- 7" TFT color display, LED backlight
- 800x480 pixel (WVGA) resolution, 64K colors
- Resistive touchscreen
- 2 Ethernet ports with switch function
- 2 USB Host ports
- SD Card Slot
- Slim design. Mounting depth less than 50mm

Highlights

The eTOP Series 500W HMI panels are a fast and low-power running the Microsoft Windows CE 6 operating system. The fanless design and wide operating temperature range are suitable for the most demanding industrial environments. The richness of communication options make these products easy to integrate in most systems.

Technical Data

Display	
Type	TFT
Resolution	800x480, WVGA
Active display area	7" diagonal
Colors	64K
Backlight	LED
Brightness	300 Cd/m ² typ.
Dimming	Yes
System Resources	
CPU	ARM Cortex A8 600MHz
Operating System	Microsoft Windows CE 6.0
User memory	128 MB Flash
RAM	256MB DDR
Operator Interface	
Touchscreen	Analog resistive
LED indicators	1 (dual color)
Interface	
Ethernet	2 10/100 Mbit with integrated Switch
USB	2 Host Interface (1 version 2.0, 1 version 2.0 and 1.1)
Serial	RS-232, RS-485, RS-422, software configurable
Expansion Slot	2 Optional plug-in
Memory Card	SD Card Slot
Functionality	
Hardware Real Time Clock	Yes, with battery back-up
Screen saver	Yes
Buzzer	Yes, audible feedback for touchscreen
Ratings	
Power supply voltage	24 Vdc (10 to 32 Vdc)
Current consumption	0.65A at 24Vdc(max.)
Fuse	Automatic
Weight	Approx 1.0 Kg

Battery	Rechargeable Lithium battery, not user-replaceable
Environmental Conditions	
Operating temperature	0 to 50 °C (vertical installation)
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 – 85 % relative humidity, non-condensing
Protection class	IP66 (front) IP20 (rear)
Dimensions	
Faceplate LxH	187x147 mm (7.36x5.79")
Cutout AxB	176x136 mm (6.93x5.35")
Depth D+T	47+4 mm (1.85+0.16")
Approvals	
CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
DNV	DNV Type Approval Certificate
UL	UL508 Listed Haz. Loc. Class I, Division 2, Groups A,B,C and D.
C-Tick	C-Tick mark
GL	Germanischer Lloyd Type Approval Certificate

Sold & Serviced By:



Canadian and International Sales

ELECTROMATE

877-737-8698

sales@electromate.com

www.electromate.com

U.S. Sales


SERVO2GO.com

877-378-0240


sales@servo2go.com

www.servo2go.com

Dimensions

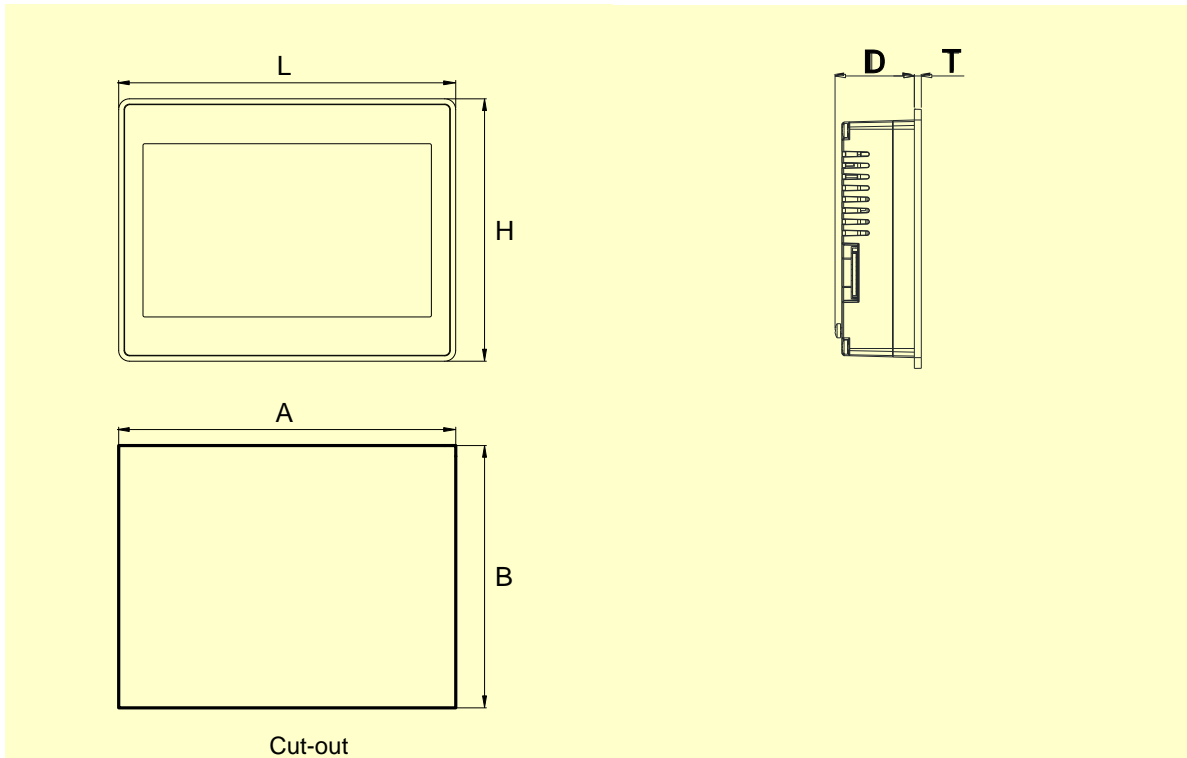

Connections

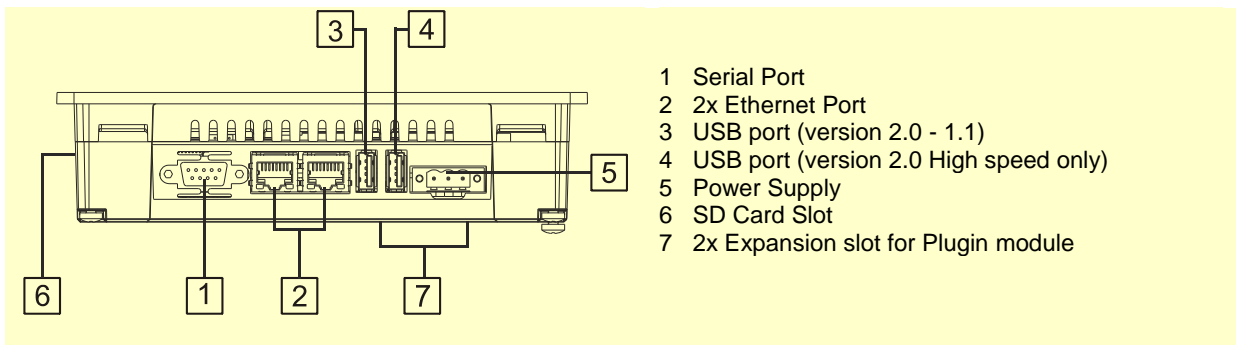

Sold & Serviced By:



Canadian and International Sales

ELECTROMATE

877-737-8698

sales@electromate.com

www.electromate.com

U.S. Sales



877-378-0240

sales@servo2go.com

www.servo2go.com

Ordering Information

Model	Part Number	Description
eTOP507W-White	+ETOP507U1PW	7" widescreen TFT color touchscreen with Ethernet and USB interfaces. White front panel.
eTOP507W-Silver	+ETOP507U2PW	7" widescreen TFT color touchscreen with Ethernet and USB interfaces. Silver front panel.
eTOP507W-Black	+ETOP507U3PW	7" widescreen TFT color touchscreen with Ethernet and USB interfaces. Black front panel.
PROTFOIL-07-GL	R-PROT12	Disposable protection foil for 5.7" and 7" eTOP touch panels (10 pieces).
PROTFOIL-07-UV	R-PROT18	Disposable protection foil for 5.7" and 7" eTOP touch panels (10 pieces). UV resistant.

Sold & Serviced By:



Canadian and International Sales

ELECTROMATE

877-737-8698

sales@electromate.com

www.electromate.com

U.S. Sales

SERVO2GO.com

877-378-0240

sales@servo2go.com

www.servo2go.com

ptn0457

Ver. 1.0

Copyright © 2011-2014 Exor International S.p.A. – Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.uniop.com