

maxon DCX

maxon DCX motors make an impression with their unsurpassed power density (torque/motor volume ratio) and their absolute quiet running. The robust construction together with the ironless rotor make the DCX motors a highly dynamic drive in almost any situation. maxon DCX motors can be configured online and are ready for delivery within 11 working days. dcx.maxonmotor.com

Standard Specification No. 100	60
Explanation of the DC motors	64
DCX Program	66-87
DC-max Program	90-95
RE Program	98-134
A-max Program	137-162
RE-max Program	165-172


DCX 6 M Precious Metal Brushes

DC motor Ø6 mm

NEW



Key Data: 0.3/0.56 W, 0.3 mNm, 17300 rpm

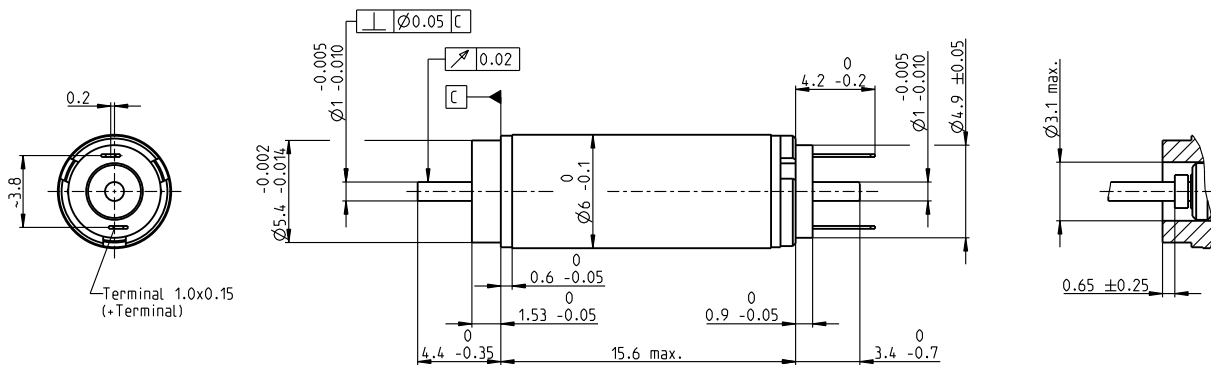

M 5:2

Motor Data


1_	Nominal voltage	V	1.5	3	4.5	6
2_	No load speed	rpm	17300	17500	17400	17400
3_	No load current	mA	34.1	17.1	11.4	8.54
4_	Nominal speed	rpm	4950	5940	5730	5690
5_	Nominal torque (max. continuous torque)	mNm	0.309	0.332	0.326	0.325
6_	Nominal current (max. continuous current)	A	0.425	0.228	0.149	0.111
7_	Stall torque	mNm	0.453	0.524	0.507	0.503
8_	Stall current	A	0.581	0.336	0.217	0.161
9_	Max. efficiency	%	58	61	60	60
10_	Terminal resistance	Ω	2.58	9.0	20.8	37.2
11_	Terminal inductance	mH	0.008	0.0316	0.0711	0.126
12_	Torque constant	mNm/A	0.779	1.560	2.34	3.12
13_	Speed constant	rpm/V	12300	6130	4090	3060
14_	Speed/torque gradient	rpm/mNm	40600	35100	36300	36600
15_	Mechanical time constant	ms	7.06	6.74	6.81	6.81
16_	Rotor inertia	gcm ²	0.017	0.0183	0.0179	0.018

Thermal data

17_	Thermal resistance housing-ambient	K/W	105
18_	Thermal resistance winding-housing	K/W	20
19_	Thermal time constant winding	s	1.71
20_	Thermal time constant motor	s	79
21_	Ambient temperature ball bearings	°C	-30...+85
21_	Ambient temperature sleeve bearings	°C	-30...+85
22_	Max. winding temperature	°C	100

Mechanical data ball bearings

23_	Max. speed	rpm	17300
24_	Axial play	mm	0...0.1
25_	Radial play	mm	0.012
26_	Max. axial load (dynamic)	N	0.5
27_	Max. force for press fits (static)	N	8.8
27_	(static, shaft supported)	N	120
28_	Max. radial load [mm from flange]	N	1.6 [5]

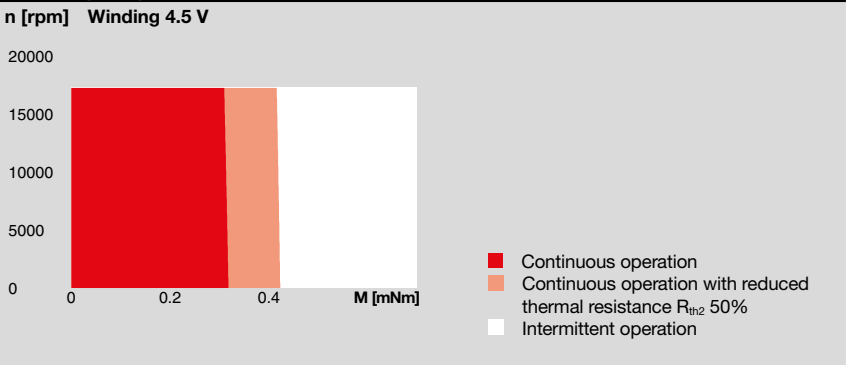

Mechanical data sleeve bearings

23_	Max. speed	rpm	17300
24_	Axial play	mm	0.02...0.1
24_	Preload	N	0.5
25_	Radial play	mm	0.012
26_	Max. axial load (dynamic)	N	0.5
27_	Max. force for press fits (static)	N	8.8
27_	(static, shaft supported)	N	120
28_	Max. radial load [mm from flange]	N	0.6 [5]

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		5
31_	Weight of motor	g	4.1
32_	Typical noise level	dBA	-

Configuration

Bearing: Sleeve bearings/ball bearings preloaded
 Commutation: Precious metal brushes
 Flange front/back: Standard flange
 Shaft front/back: Length
 Electric connection: Terminals or cables (encoder always with Flex)

Sold & Serviced By:

 Toll Free Phone (877) SERV098
 www.electromate.com
 sales@electromate.com


DCX 8 M Precious Metal Brushes

DC motor Ø8 mm

NEW



Key Data: 0.5/1.0 W, 0.65 mNm, 17 300 rpm

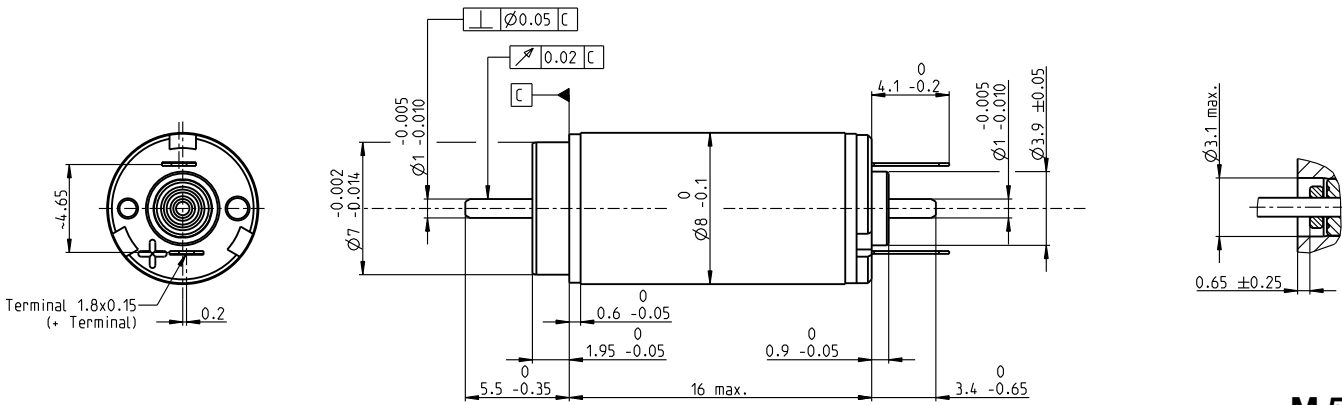

M 5:2

maxon DCX

Motor Data


1_	Nominal voltage	V	2.4	4.2	6	7.2	9	12
2_	No load speed	rpm	11500	11700	11000	11900	11900	12900
3_	No load current	mA	11.9	6.93	4.51	4.12	3.3	2.74
4_	Nominal speed	rpm	4780	4950	4190	4820	5190	5800
5_	Nominal torque (max. continuous torque)	mNm	0.653	0.649	0.641	0.62	0.652	0.614
6_	Nominal current (max. continuous current)	A	0.345	0.199	0.13	0.113	0.0949	0.0728
7_	Stall torque	mNm	1.13	1.14	1.05	1.06	1.17	1.13
8_	Stall current	A	0.581	0.34	0.207	0.187	0.166	0.13
9_	Max. efficiency	%	74	74	73	73	74	74
10_	Terminal resistance	Ω	4.13	12	29	38.5	54.3	92.2
11_	Terminal inductance	mH	0.014	0.0411	0.0941	0.117	0.183	0.276
12_	Torque constant	mNm/A	1.95	3.360	5.08	5.67	7.07	8.71
13_	Speed constant	rpm/V	4900	2850	1880	1680	1350	1100
14_	Speed/torque gradient	rpm/mNm	10400	10500	10700	11400	10400	11600
15_	Mechanical time constant	ms	4.17	4.15	4.18	4.24	4.15	4.28
16_	Rotor inertia	gcm ²	0.038	0.0379	0.0372	0.035	0.038	0.035

Thermal data

17_	Thermal resistance housing-ambient	K/W	101
18_	Thermal resistance winding-housing	K/W	16.9
19_	Thermal time constant winding	s	2.31
20_	Thermal time constant motor	s	162
21_	Ambient temperature ball bearings	°C	-30...+85
21_	Ambient temperature sleeve bearings	°C	-30...+85
22_	Max. winding temperature	°C	100

Operating Range

n [rpm] Winding 6 V

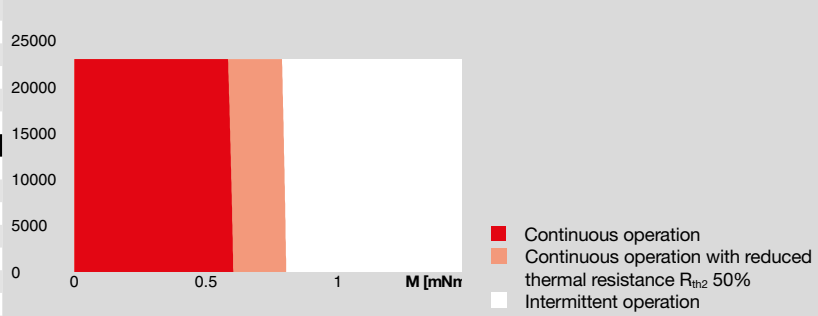

Mechanical data ball bearings

23_	Max. speed	rpm	17 300
24_	Axial play	mm	0...0.1
	Preload	N	0.5
25_	Radial play	mm	0.012
26_	Max. axial load (dynamic)	N	0.2
27_	Max. force for press fits (static)	N	10
	(static, shaft supported)	N	120
28_	Max. radial load [mm from flange]	N	0.6 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	17 300
24_	Axial play	mm	0.02...0.1
	Preload	N	0
25_	Radial play	mm	0.012
26_	Max. axial load (dynamic)	N	0.15
27_	Max. force for press fits (static)	N	10
	(static, shaft supported)	N	120
28_	Max. radial load [mm from flange]	N	0.4 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
277_GPX 8 A	1-5	376_ENX 8 MAG 384_ENX 8 OPT	426_ESCON Module 24/2 426_ESCON 36/2 DC 434_EPOS2 24/2 (DCX) 434_EPOS2 Module 36/2 441_EPOS4 Module/Comp. 24/1.5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		5
31_	Weight of motor	g	4.1
32_	Typical noise level	dBA	-

Configuration

Bearing: Sleeve bearings/ball bearings preloaded
 Commutation: Precious metal brushes with or without CLL
 Flange front/back: Standard flange
 Shaft front/back: Length
 Electric connection: Terminals or cables (encoder always with Flex)

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com


sales@electromate.com

DCX 10 S Precious Metal Brushes

DC motor Ø10 mm



Key Data: 1/1.4 W, 0.9 mNm, 14300 rpm

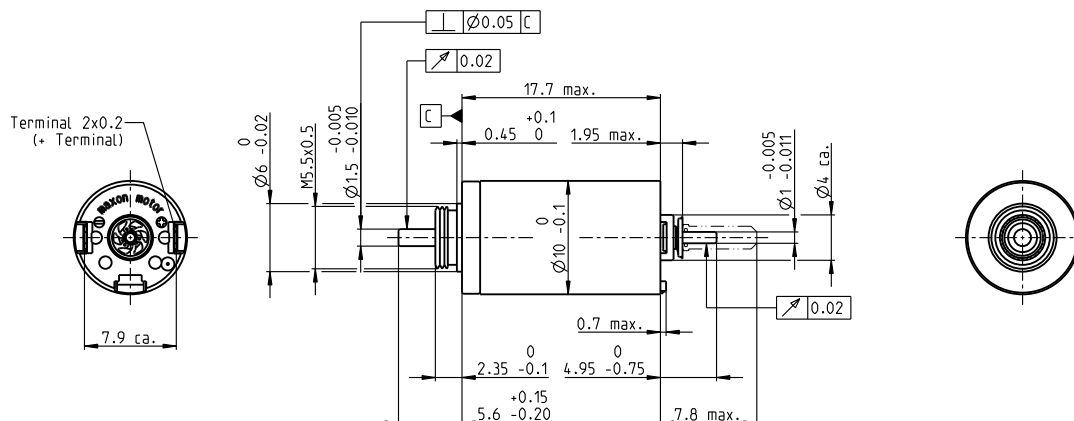

M 3:2

Motor Data


1_	Nominal voltage	V	1.5	3	4.5	6	9	12
2_	No load speed	rpm	12600	13000	12600	12600	12600	12500
3_	No load current	mA	84.1	43.8	28	21	14	10.5
4_	Nominal speed	rpm	4530	4690	4270	4100	3930	3890
5_	Nominal torque (max. continuous torque)	mNm	0.918	0.948	0.944	0.927	0.909	0.905
6_	Nominal current (max. continuous current)	A	0.924	0.49	0.316	0.233	0.152	0.114
7_	Stall torque	mNm	1.49	1.54	1.48	1.43	1.38	1.37
8_	Stall current	A	1.39	0.742	0.463	0.335	0.215	0.16
9_	Max. efficiency	%	58	58	58	57	56	56
10_	Terminal resistance	Ω	1.08	4.04	9.72	17.9	41.8	74.9
11_	Terminal inductance	mH	0.014	0.051	0.122	0.217	0.488	0.868
12_	Torque constant	mNm/A	1.07	2.07	3.2	4.27	6.4	8.53
13_	Speed constant	rpm/V	8950	4600	2980	2240	1490	1120
14_	Speed/torque gradient	rpm/mNm	9030	8970	9060	9400	9750	9830
15_	Mechanical time constant	ms	7.24	7.19	7.21	7.22	7.27	7.26
16_	Rotor inertia	gcm ²	0.077	0.077	0.076	0.073	0.071	0.071

Thermal data

17_	Thermal resistance housing-ambient	K/W	37.6
18_	Thermal resistance winding-housing	K/W	22.0
19_	Thermal time constant winding	s	4.69
20_	Thermal time constant motor	s	156
21_	Ambient temperature ball bearings	°C	-40...+85
21_	Ambient temperature sleeve bearings	°C	-30...+85
22_	Max. winding temperature	°C	100

Operating Range

n [rpm] Winding 4.5 V

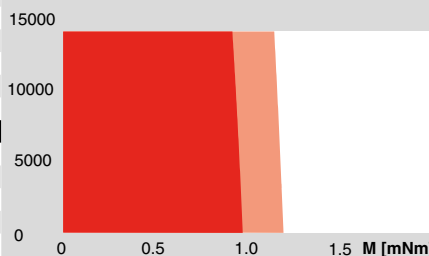

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	14300
24_	Axial play	mm	0...0.1
	Preload	N	0.5
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.5
27_	Max. force for press fits (static)	N	8.8
	(static, shaft supported)	N	120
28_	Max. radial load [mm from flange]	N	1.5 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	14300
24_	Axial play	mm	0...0.15
	Preload	N	0
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	30
	(static, shaft supported)	N	120
28_	Max. radial load [mm from flange]	N	0.8 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
278_GPX 10 A	1-5	379_ENX 10 EASY 379_ENX 10 QUAD	426_ESCON Module 24/2 426_ESCON 36/2 DC 434_EPOS2 24/2 (DCX) 434_EPOS2 Module 36/2 441_EPOS4 Module/Comp. 24/1.5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		7
31_	Weight of motor	g	6.3
32_	Typical noise level	dBA	35

Configuration

Bearing: Sleeve bearings/ball bearings preloaded
 Commutation: Precious metal brushes with or without CLL
 Flange front/back: Standard flange/Flange with thread holes/no flange
 Shaft front/back: Length
 Electric connection: Terminals or cable/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com


DCX 10 L Precious Metal Brushes

DC motor Ø10 mm



maxon DCX

Key Data: 1.5/3 W, 2.2 mNm, 14300 rpm

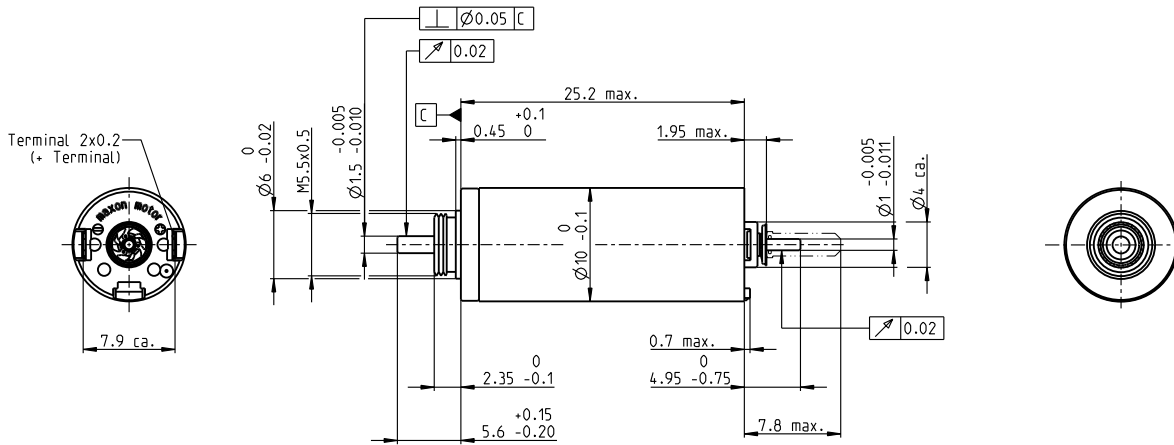

M 3:2


Motor Data

1_	Nominal voltage	V	1.5	3	4.5	6	9	12
2_	No load speed	rpm	11600	12200	12000	12200	12000	11300
3_	No load current	mA	72.1	38.7	25.2	19.3	12.6	8.71
4_	Nominal speed	rpm	9230	6930	7110	6640	6780	5980
5_	Nominal torque (max. continuous torque)	mNm	1.04	2.05	2.2	1.94	2.06	2.03
6_	Nominal current (max. continuous current)	A	0.924	0.922	0.648	0.436	0.304	0.211
7_	Stall torque	mNm	5.13	4.81	5.45	4.32	4.8	4.36
8_	Stall current	A	4.23	2.09	1.55	0.937	0.682	0.439
9_	Max. efficiency	%	75	75	77	74	75	74
10_	Terminal resistance	Ω	0.355	1.44	2.9	6.4	13.2	27.3
11_	Terminal inductance	mH	0.005	0.020	0.045	0.078	0.181	0.362
12_	Torque constant	mNm/A	1.21	2.31	3.52	4.61	7.04	10.0
13_	Speed constant	rpm/V	7870	4140	2710	2070	1360	960
14_	Speed/torque gradient	rpm/mNm	2300	2590	2240	2880	2550	2640
15_	Mechanical time constant	ms	3.68	3.57	3.54	3.58	3.56	3.59
16_	Rotor inertia	gcm ²	0.153	0.132	0.151	0.119	0.134	0.130

Thermal data

17_	Thermal resistance housing-ambient	K/W	36.5
18_	Thermal resistance winding-housing	K/W	10.6
19_	Thermal time constant winding	s	3.94
20_	Thermal time constant motor	s	151
21_	Ambient temperature ball bearings	°C	-40...+85
21_	Ambient temperature sleeve bearings	°C	-30...+85
22_	Max. winding temperature	°C	100

Operating Range

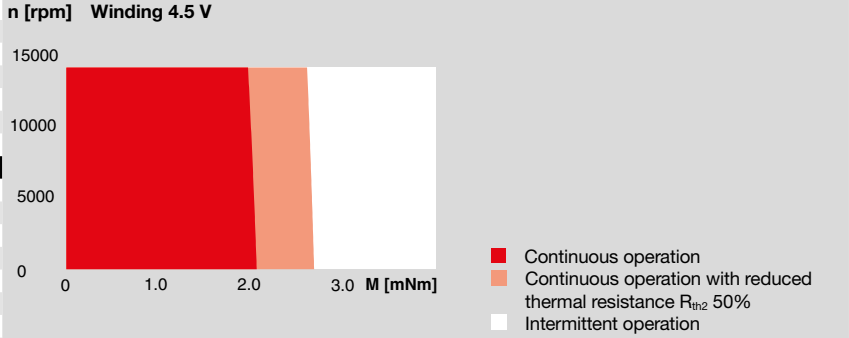

Mechanical data ball bearings

23_	Max. speed	rpm	14300
24_	Axial play	mm	0...0.1
	Preload	N	0.5
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.5
27_	Max. force for press fits (static)	N	8.8
	(static, shaft supported)	N	120
28_	Max. radial load [mm from flange]	N	1.5 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	14300
24_	Axial play	mm	0...0.15
	Preload	N	0
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	30
	(static, shaft supported)	N	120
28_	Max. radial load [mm from flange]	N	0.8 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
278_GPX 10 A	1-5	379_ENX 10 EASY 379_ENX 10 QUAD	426_ESCON Module 24/2 426_ESCON 36/2 DC 434_EPOS2 24/2 (DCX) 434_EPOS2 Module 36/2 441_EPOS4 Module/Comp. 24/1.5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		7
31_	Weight of motor	g	11
32_	Typical noise level	dBA	37

Configuration

Bearing: Sleeve bearings/ball bearings preloaded
 Commutation: Precious metal brushes with or without CLL
 Flange front/back: Standard flange/Flange with thread holes/no flange
 Shaft front/back: Length
 Electric connection: Terminals or cable/cable length/connector type

Sold & Serviced By:

ELECTROMATE


Toll Free Phone (877) SERV098
www.electromate.com
sales@electromate.com

DCX 12 S Precious Metal Brushes

DC motor Ø12 mm




Key Data: 1.6/2 W, 2.0 mNm, 13000 rpm

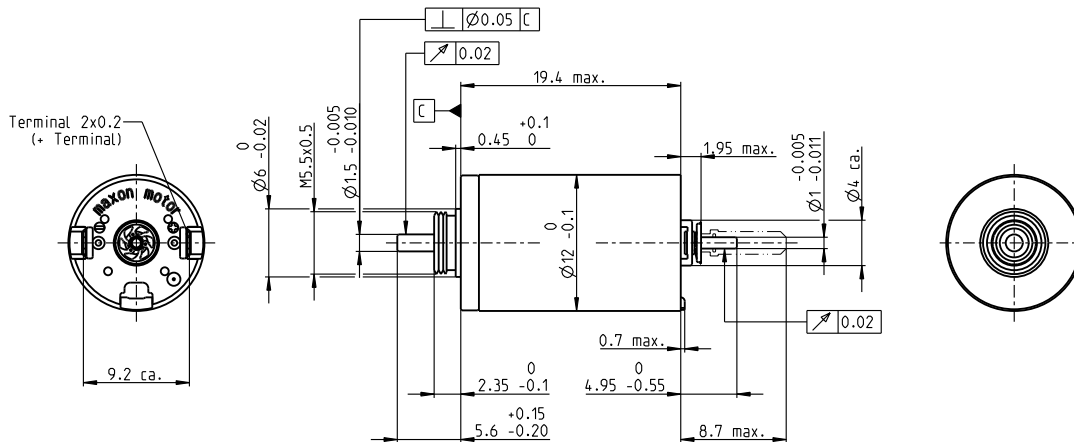

M 3:2

Motor Data							
1_	Nominal voltage	V	3	4.5	6	9	12
2_	No load speed	rpm	9090	9000	9100	9010	9020
3_	No load current	mA	31.8	20.9	15.9	10.5	7.88
4_	Nominal speed	rpm	3760	3620	3870	3700	3620
5_	Nominal torque (max. continuous torque)	mNm	1.92	1.9	1.95	1.92	1.88
6_	Nominal current (max. continuous current)	A	0.655	0.427	0.332	0.216	0.159
7_	Stall torque	mNm	3.35	3.25	3.46	3.33	3.21
8_	Stall current	A	1.09	0.701	0.566	0.36	0.261
9_	Max. efficiency	%	69	69	70	69	69
10_	Terminal resistance	Ω	2.74	6.42	10.6	25	46
11_	Terminal inductance	mH	0.0724	0.166	0.29	0.664	1.17
12_	Torque constant	mNm/A	3.06	4.63	6.12	9.26	12.3
13_	Speed constant	rpm/V	3120	2060	1560	1030	775
14_	Speed/torque gradient	rpm/mNm	2800	2860	2700	2780	2890
15_	Mechanical time constant	ms	8.37	8.32	8.31	8.33	8.33
16_	Rotor inertia	gcm ²	0.286	0.278	0.293	0.286	0.275

Thermal data			Operating Range	
17_	Thermal resistance housing-ambient	K/W	35	n [rpm] Winding 4.5 V
18_	Thermal resistance winding-housing	K/W	14.4	
19_	Thermal time constant winding	s	7.18	
20_	Thermal time constant motor	s	146	
21_	Ambient temperature ball bearings	°C	-40...+85	
21_	Ambient temperature sleeve bearings	°C	-30...+85	
22_	Max. winding temperature	°C	100	

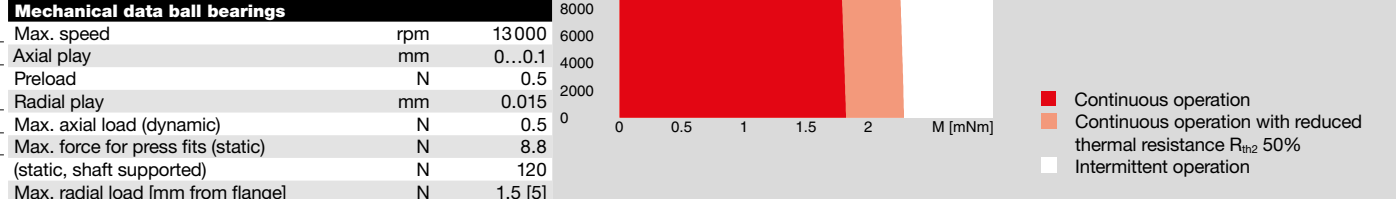

Mechanical data ball bearings			maxon Modular System				
23_	Max. speed	rpm	13000	maxon gear	Stages [opt.]	maxon sensor	maxon motor control
24_	Axial play	mm	0...0.1	279_GPX 12 A/C	1-4	379_ENX 10 EASY	426_ESCON Module 24/2
	Preload	N	0	280_GPX 12 LN/LZ	1-4	379_ENX 10 QUAD	426_ESCON 36/2 DC
25_	Radial play	mm	0.015	281_GPX 12 HP	2-4		434_EPOS2 24/2 (DCX)
26_	Max. axial load (dynamic)	N	0.1	283_GPX 14 A/C	3-4		434_EPOS2 Module 36/2
27_	Max. force for press fits (static)	N	30	284_GPX 14 LN/LZ	3-4		441_EPOS4 Module/Comp. 24/1.5
	(static, shaft supported)	N	120	285_GPX 14 HP	4		
28_	Max. radial load [mm from flange]	N	1.5 [5]				

Mechanical data sleeve bearings			Other specifications				
23_	Max. speed	rpm	13000	29_	Number of pole pairs	1	
24_	Axial play	mm	0...0.15	30_	Number of commutator segments	7	
	Preload	N	0	31_	Weight of motor	g	11
25_	Radial play	mm	0.015	32_	Typical noise level	dBA	40
26_	Max. axial load (dynamic)	N	0.1				
27_	Max. force for press fits (static)	N	30				
	(static, shaft supported)	N	120				
28_	Max. radial load [mm from flange]	N	0.8 [5]				

Configuration
 Bearing: Sleeve bearings/ball bearings preloaded
 Commutation: Precious metal brushes with or without CLL
 Flange front/back: Standard flange/Flange with thread holes/no flange
 Shaft front/back: Length
 Electric connection: Terminals or cable/cable length/connector type

Sold & Serviced By:

 Toll Free Phone (877) SERV098
www.electromate.com
sales@electromate.com


DCX 12 L Precious Metal Brushes

DC motor Ø12 mm



maxon DCX

Key Data: 2.5/4.8 W, 4.2 mNm, 12000 rpm

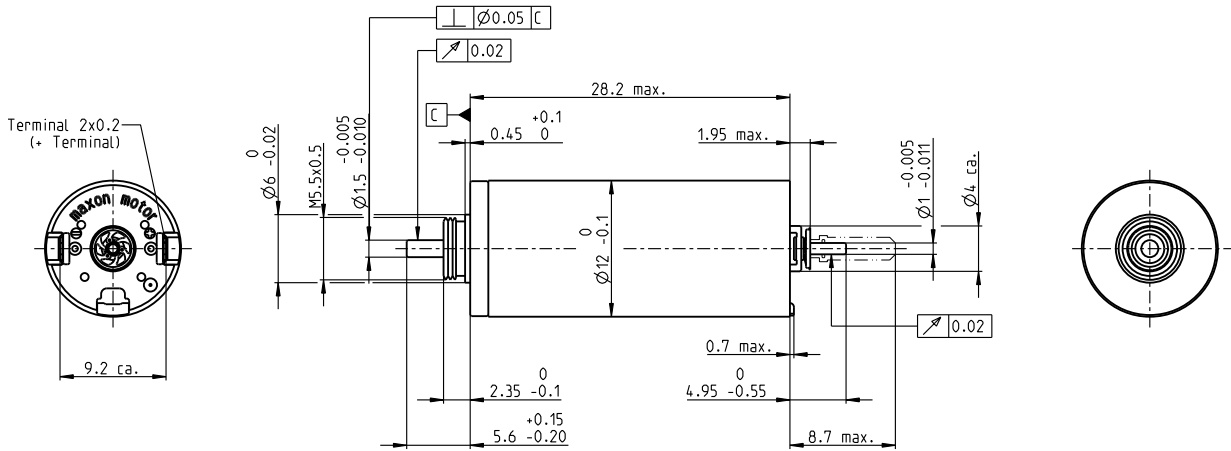

M 3:2

Motor Data


		3	4.5	6	9	12	18
1_ Nominal voltage	V	3	4.5	6	9	12	18
2_ No load speed	rpm	8810	8820	8810	8820	8810	8810
3_ No load current	mA	31.3	20.9	15.7	10.4	7.83	5.22
4_ Nominal speed	rpm	6230	5640	5540	5750	5560	5540
5_ Nominal torque (max. continuous torque)	mNm	2.88	4.02	3.88	4.13	3.89	3.87
6_ Nominal current (max. continuous current)	A	0.924	0.851	0.616	0.437	0.309	0.205
7_ Stall torque	mNm	9.9	11.2	10.5	11.9	10.6	10.5
8_ Stall current	A	3.08	2.32	1.63	1.23	0.824	0.543
9_ Max. efficiency	%	81	82	82	83	82	82
10_ Terminal resistance	Ω	0.975	1.94	3.68	7.29	14.6	33.1
11_ Terminal inductance	mH	0.031	0.071	0.125	0.282	0.502	1.13
12_ Torque constant	mNm/A	3.22	4.83	6.44	9.66	12.9	19.3
13_ Speed constant	rpm/V	2970	1980	1480	989	741	494
14_ Speed/torque gradient	rpm/mNm	898	793	846	746	839	848
15_ Mechanical time constant	ms	4.55	4.43	4.4	4.37	4.38	4.39
16_ Rotor inertia	gcm ²	0.484	0.533	0.496	0.559	0.498	0.495

Thermal data

17_ Thermal resistance housing-ambient	K/W	31
18_ Thermal resistance winding-housing	K/W	10.3
19_ Thermal time constant winding	s	10.1
20_ Thermal time constant motor	s	194
21_ Ambient temperature ball bearings	°C	-40...+85
21_ Ambient temperature sleeve bearings	°C	-30...+85
22_ Max. winding temperature	°C	100

Operating Range

n [rpm] Winding 4.5 V

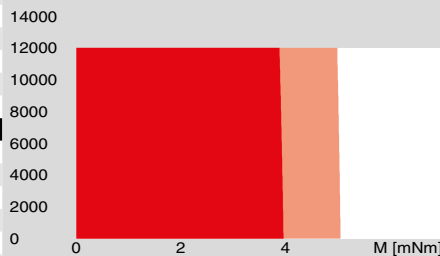

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_ Max. speed	rpm	12000
24_ Axial play	mm	0...0.1
Preload	N	0.5
25_ Radial play	mm	0.015
26_ Max. axial load (dynamic)	N	0.5
27_ Max. force for press fits (static)	N	8.8
(static, shaft supported)	N	120
28_ Max. radial load [mm from flange]	N	1.5 [5]

Mechanical data sleeve bearings

23_ Max. speed	rpm	12000
24_ Axial play	mm	0...0.15
Preload	N	0
25_ Radial play	mm	0.015
26_ Max. axial load (dynamic)	N	0.1
27_ Max. force for press fits (static)	N	30
(static, shaft supported)	N	120
28_ Max. radial load [mm from flange]	N	0.8 [5]

maxon Modular System

	maxon gear	Stages [opt.]	maxon sensor	maxon motor control
23_ Max. speed	279_GPX 12 A/C	1-4	379_ENX 10 EASY	426_ESCON Module 24/2
24_ Axial play	280_GPX 12 LN/LZ	1-4	379_ENX 10 QUAD	426_ESCON 36/2 DC
25_ Radial play	281_GPX 12 HP	2-4		434_EPOS2 24/2 (DCX)
26_ Max. axial load (dynamic)	283_GPX 14 A/C	3-4		434_EPOS2 Module 36/2
27_ Max. force for press fits (static)	284_GPX 14 LN/LZ	3-4		441_EPOS4 Module/Comp. 24/1.5
(static, shaft supported)	285_GPX 14 HP	4		
28_ Max. radial load [mm from flange]				

Other specifications

29_ Number of pole pairs		1
30_ Number of commutator segments		7
31_ Weight of motor	g	16
32_ Typical noise level	dBA	44

Configuration

Bearing: Sleeve bearings/ball bearings preloaded
 Commutation: Precious metal brushes with or without CLL
 Flange front/back: Standard flange/Flange with thread holes/no flange
 Shaft front/back: Length
 Electric connection: Terminals or cable/cable length/connector type


xdrives.maxonmotor.com

DCX 14 L Precious Metal Brushes

DC motor Ø14 mm



Key Data: 3/5 W, 6.3 mNm, 8680 rpm

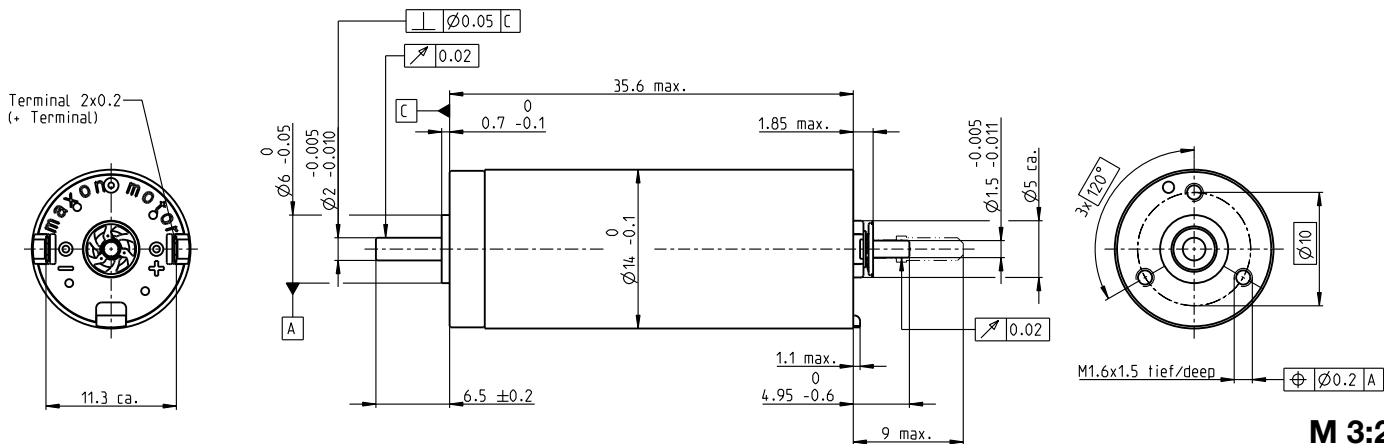

M 3:2

Motor Data


1_	Nominal voltage	V	3	4.5	6	9	12	18	24
2_	No load speed	rpm	7720	7740	7740	7740	7740	7730	7740
3_	No load current	mA	73.6	49.1	36.8	24.5	18.4	12.2	9.2
4_	Nominal speed	rpm	5770	5160	5140	5200	5200	5040	5150
5_	Nominal torque (max. continuous torque)	mNm	4.12	6.29	6.23	6.37	6.38	6.01	6.24
6_	Nominal current (max. continuous current)	A	1.2	1.2	0.889	0.605	0.454	0.286	0.223
7_	Stall torque	mNm	16.5	19.1	18.8	19.6	19.7	17.5	18.9
8_	Stall current	A	4.52	3.49	2.57	1.79	1.35	0.799	0.647
9_	Max. efficiency	%	76	77.7	77.6	78	78.1	77	77.7
10_	Terminal resistance	Ω	0.664	1.29	2.33	5.02	8.9	22.5	37.1
11_	Terminal inductance	mH	0.0252	0.0567	0.101	0.227	0.403	0.908	1.61
12_	Torque constant	mNm/A	3.65	5.47	7.3	10.9	14.6	21.9	29.2
13_	Speed constant	rpm/V	2620	1740	1310	872	654	436	327
14_	Speed/torque gradient	rpm/mNm	476	411	418	400	399	449	415
15_	Mechanical time constant	ms	4.14	4.06	4.05	4.04	4.05	4.1	4.09
16_	Rotor inertia	gcm ²	0.831	0.942	0.926	0.966	0.97	0.872	0.939

Thermal data

17_	Thermal resistance housing-ambient	K/W	22.2
18_	Thermal resistance winding-housing	K/W	8.63
19_	Thermal time constant winding	s	10.3
20_	Thermal time constant motor	s	226
21_	Ambient temperature ball bearings	°C	-40...+85
21_	Ambient temperature sleeve bearings	°C	-30...+85
22_	Max. winding temperature	°C	100

Operating Range

n [rpm] Winding 9 V

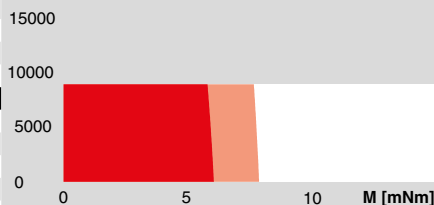

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	8680
24_	Axial play	mm	0...0.1
	Preload	N	0.8
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.8
27_	Max. force for press fits (static)	N	18
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	10 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	8680
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	60
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	2 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
283_GPX 14 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
284_GPX 14 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
285_GPX 14 HP	2-3 [4]		434_EPOS2 24/2 (DCX)
286_GPX 16 A/C	3-4		434_EPOS2 Module 36/2
287_GPX 16 LN/LZ	3-4		441_EPOS4 Module/Comp. 24/1.5
288_GPX 16 HP	4		447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		7
31_	Weight of motor	g	26
32_	Typical noise level	dBA	44

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com
sales@electromate.com


DCX 14 L Graphite Brushes

DC motor Ø14 mm



maxon DCX

Key Data: 6/10 W, 6.9 mNm, 17000 rpm

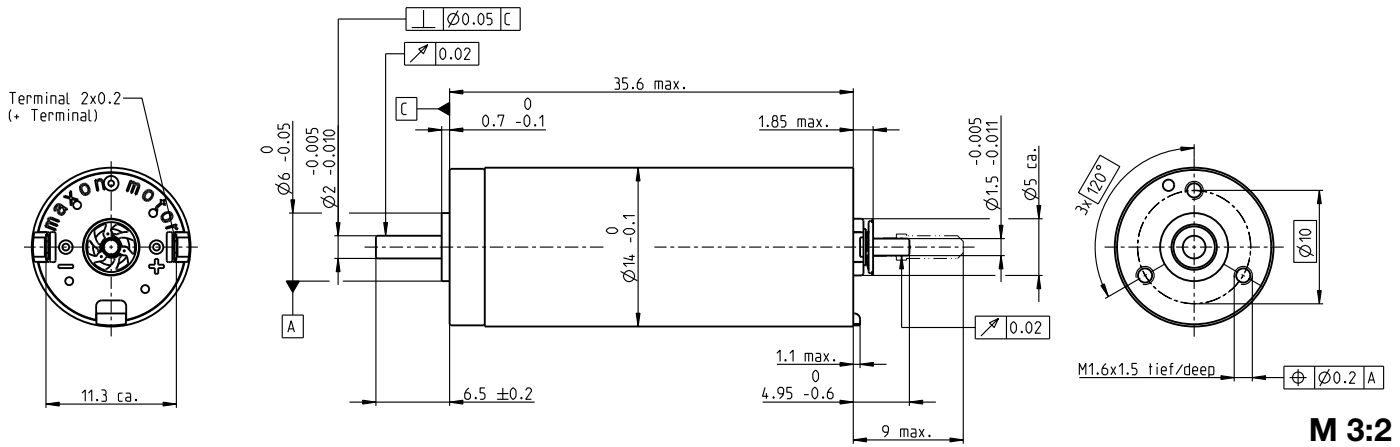

M 3:2

Motor Data


		4.5	6	9	12	18	24	
1_	Nominal voltage	V	4.5	6	9	12	18	24
2_	No load speed	rpm	11600	10400	11700	10300	11600	10300
3_	No load current	mA	73.9	46.4	37	23.2	18.5	11.6
4_	Nominal speed	rpm	8460	7430	8750	7370	8760	7300
5_	Nominal torque (max. continuous torque)	mNm	6.36	6.96	6.88	6.91	6.94	6.66
6_	Nominal current (max. continuous current)	A	1.81	1.31	0.974	0.651	0.492	0.314
7_	Stall torque	mNm	23.5	24.8	27.8	24.7	28.5	22.9
8_	Stall current	A	6.45	4.53	3.8	2.26	1.95	1.05
9_	Max. efficiency	%	79.5	80.8	81.4	80.1	81.3	80.1
10_	Terminal resistance	Ω	0.698	1.33	2.37	5.31	9.21	22.9
11_	Terminal inductance	mH	0.0252	0.0567	0.101	0.227	0.403	0.908
12_	Torque constant	mNm/A	3.65	5.47	7.3	10.9	14.6	21.9
13_	Speed constant	rpm/V	2620	1740	1310	872	654	436
14_	Speed/torque gradient	rpm/mNm	500	422	424	423	413	456
15_	Mechanical time constant	ms	4.35	4.17	4.11	4.28	4.19	4.17
16_	Rotor inertia	gcm ²	0.831	0.942	0.926	0.966	0.97	0.872

Thermal data

17_	Thermal resistance housing-ambient	K/W	22.2
18_	Thermal resistance winding-housing	K/W	8.63
19_	Thermal time constant winding	s	10.3
20_	Thermal time constant motor	s	226
21_	Ambient temperature ball bearings	°C	-40...+100
21_	Ambient temperature sleeve bearings	°C	-30...+100
22_	Max. winding temperature	°C	125

Operating Range

n [rpm] Winding 12 V

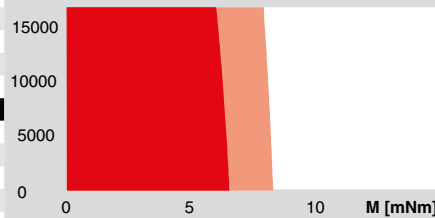

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	17000
24_	Axial play	mm	0...0.1
	Preload	N	0.8
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.8
27_	Max. force for press fits (static)	N	18
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	10 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	15000
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	60
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	2 [5]

maxon Modular System

	maxon gear	Stages [opt.]	maxon sensor	maxon motor control
23_	283_GPX 14 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
24_	284_GPX 14 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
25_	285_GPX 14 HP	2-3 [4]		434_EPOS2 24/2 (DCX)
26_	286_GPX 16 A/C	3-4		434_EPOS2 Module 36/2
27_	287_GPX 16 LN/LZ	3-4		441_EPOS4 Module/Comp. 24/1.5
28_	288_GPX 16 HP	4		447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		7
31_	Weight of motor	g	26
32_	Typical noise level	dBA	40

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com


sales@electromate.com

DCX 16 S Precious Metal Brushes

DC motor Ø16 mm



Key Data: 3/5 W, 5.3 mNm, 8680 rpm

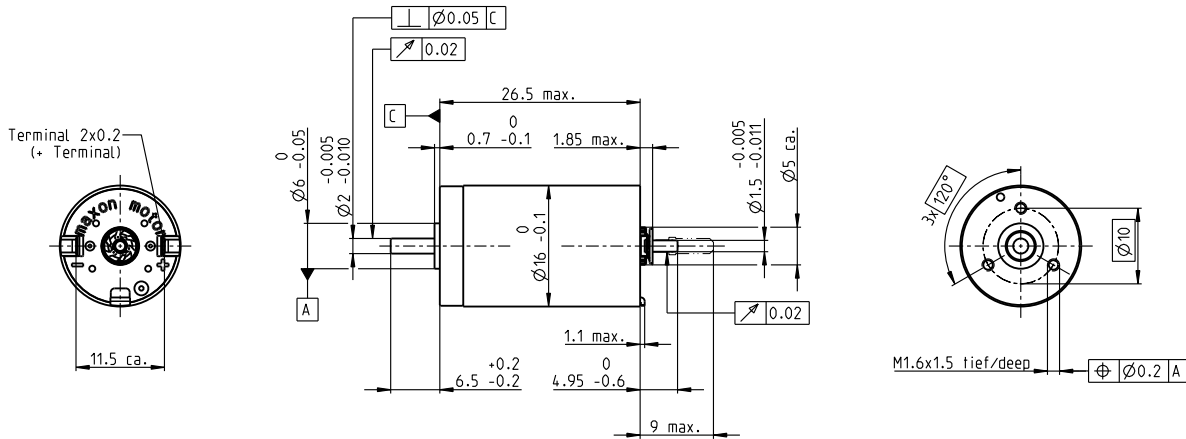

M 1:1

Motor Data


1_	Nominal voltage	V	3	4.5	6	9	12	18	24
2_	No load speed	rpm	6320	6320	6610	6320	6260	6340	6250
3_	No load current	mA	44.6	29.7	23.4	14.9	11	7.43	5.51
4_	Nominal speed	rpm	3350	3300	3760	3270	3320	3530	3200
5_	Nominal torque (max. continuous torque)	mNm	5.15	5.05	5.36	5	5.19	5.45	4.99
6_	Nominal current (max. continuous current)	A	1.20	0.784	0.65	0.389	0.299	0.211	0.144
7_	Stall torque	mNm	11.1	10.7	12.6	10.6	11.2	12.5	10.4
8_	Stall current	A	2.49	1.61	1.48	0.791	0.624	0.467	0.289
9_	Max. efficiency	%	75	75	77	75	75	77	74
10_	Terminal resistance	Ω	1.20	2.80	4.06	11.4	19.2	38.6	83.1
11_	Terminal inductance	mH	0.036	0.080	0.131	0.320	0.581	1.28	2.32
12_	Torque constant	mNm/A	4.45	6.67	8.53	13.3	18.0	26.7	36.0
13_	Speed constant	rpm/V	2150	1430	1120	715	531	358	265
14_	Speed/torque gradient	rpm/mNm	580	600	533	610	568	517	613
15_	Mechanical time constant	ms	6.09	6.09	6.05	6.13	6.11	6.08	6.17
16_	Rotor inertia	gcm ²	1.00	0.97	1.08	0.959	1.03	1.12	0.960

Thermal data

17_	Thermal resistance housing-ambient	K/W	23.5
18_	Thermal resistance winding-housing	K/W	9.9
19_	Thermal time constant winding	s	9.63
20_	Thermal time constant motor	s	227
21_	Ambient temperature ball bearings	°C	-40...+85
21_	Ambient temperature sleeve bearings	°C	-30...+85
22_	Max. winding temperature	°C	100

Operating Range

n [rpm] Winding 12 V

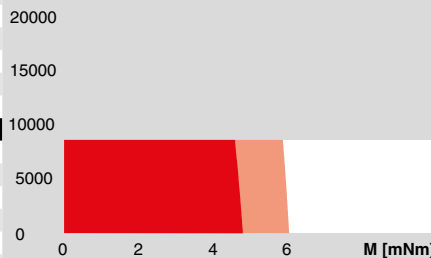

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	8680
24_	Axial play	mm	0...0.1
	Preload	N	0.8
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.8
27_	Max. force for press fits (static)	N	18
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	10 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	8680
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	60
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	2 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
286_GPX 16 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
287_GPX 16 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
288_GPX 16 HP	2-3 [4]	381_ENX 16 EASY	434_EPOS2 24/2 (DCX)
290_GPX 19 A/C	3-4	382_ENX 16 EASY Abs.	434_EPOS2 Module 36/2
291_GPX 19 LN/LZ	3-4		441_EPOS4 Module/Comp. 24/1.5
292_GPX 19 HP	4		442_EPOS4 Module/Comp. 50/5
			447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		7
31_	Weight of motor	g	26
32_	Typical noise level	dBA	40

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com


sales@electromate.com

DCX 16 S Graphite Brushes

DC motor Ø16 mm



Key Data: 5/10 W, 5.4 mNm, 17000 rpm

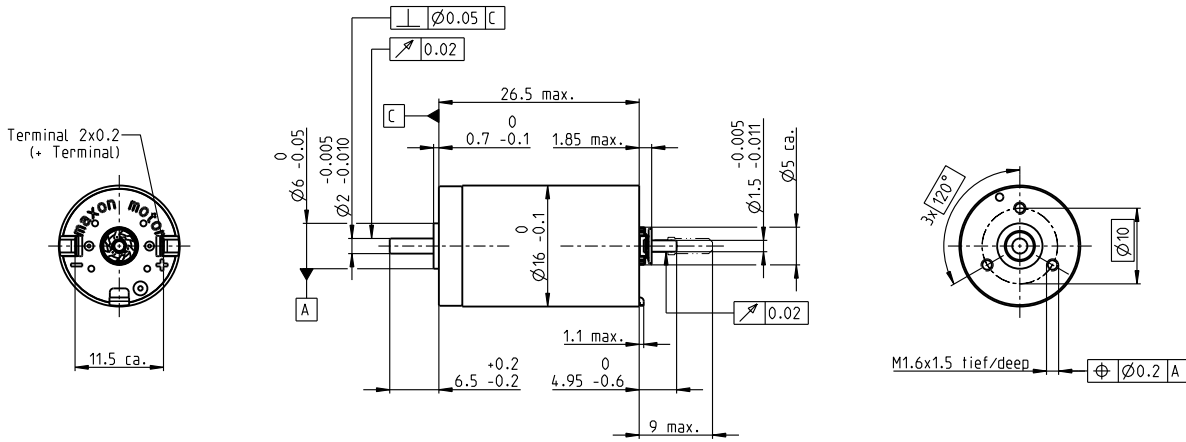

M 1:1

Motor Data


1_	Nominal voltage	V	6	9	12	18	24	48
2_	No load speed	rpm	12700	12700	13200	12700	12700	12600
3_	No load current	mA	63.9	42.6	35.4	22.4	16.8	8.28
4_	Nominal speed	rpm	9400	9400	9850	9260	9430	9250
5_	Nominal torque (max. continuous torque)	mNm	5.45	5.4	5.36	5.21	5.43	5.32
6_	Nominal current (max. continuous current)	A	1.28	0.847	0.662	0.411	0.321	0.156
7_	Stall torque	mNm	21.3	21	22.6	20.1	21.7	20.6
8_	Stall current	A	4.79	3.15	2.65	1.51	1.22	0.572
9_	Max. efficiency	%	78	78	76	76	78	77
10_	Terminal resistance	Ω	1.25	2.85	4.53	12	19.7	83.9
11_	Terminal inductance	mH	0.036	0.080	0.131	0.320	0.569	2.32
12_	Torque constant	mNm/A	4.45	6.67	8.53	13.3	17.8	36.0
13_	Speed constant	rpm/V	2150	1430	1120	715	536	265
14_	Speed/torque gradient	rpm/mNm	605	612	594	641	592	620
15_	Mechanical time constant	ms	6.35	6.21	6.74	6.43	6.32	6.23
16_	Rotor inertia	gcm ²	1.00	0.970	1.08	0.959	1.02	0.960

Thermal data

17_	Thermal resistance housing-ambient	K/W	23.5
18_	Thermal resistance winding-housing	K/W	9.9
19_	Thermal time constant winding	s	9.63
20_	Thermal time constant motor	s	227
21_	Ambient temperature ball bearings	°C	-40...+100
21_	Ambient temperature sleeve bearings	°C	-30...+100
22_	Max. winding temperature	°C	125

Operating Range

n [rpm] Winding 12 V

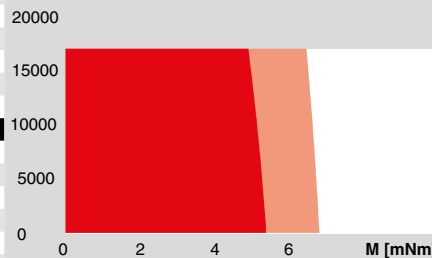

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	17000
24_	Axial play	mm	0...0.1
	Preload	N	0.8
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.8
27_	Max. force for press fits (static)	N	18
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	10 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	17000
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	60
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	2 [5]

maxon Modular System

23_	Max. speed	rpm	17000	maxon gear	Stages [opt.]	maxon sensor	maxon motor control
24_	Axial play	mm	0...0.2	286_GPX 16 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
	Preload	N	0	287_GPX 16 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
25_	Radial play	mm	0.015	288_GPX 16 HP	2-3 [4]	381_ENX 16 EASY	427_ESCON Module 50/5
26_	Max. axial load (dynamic)	N	0.1	290_GPX 19 A/C	3-4	382_ENX 16 EASY Abs.	428_ESCON 50/5
27_	Max. force for press fits (static)	N	60	291_GPX 19 LN/LZ	3-4		434_EPOS2 24/2 (DCX)
	(static, shaft supported)	N	300	292_GPX 19 HP	4		434_EPOS2 Module 36/2
28_	Max. radial load [mm from flange]	N	2 [5]				435_EPOS2 50/5
							441_EPOS4 Module/Comp. 24/1.5
							442_EPOS4 Module/Comp. 50/5
							447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		7
31_	Weight of motor	g	26
32_	Typical noise level	dBA	38

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098


www.electromate.com

sales@electromate.com

DCX 16 L Precious Metal Brushes

DC motor Ø16 mm

Key Data: 5/10 W, 11.5 mNm, 8680 rpm

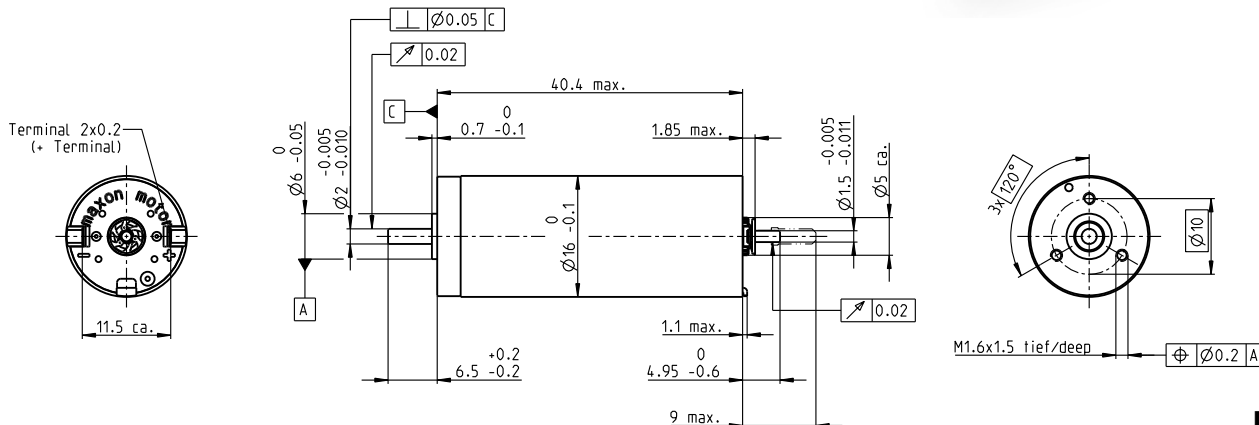

M 1:1

Motor Data


1_	Nominal voltage	V	3	6	9	12	18	24
2_	No load speed	rpm	6400	6620	6410	6400	6400	6560
3_	No load current	mA	62.5	32.6	20.8	15.6	10.4	8.05
4_	Nominal speed	rpm	5450	4920	4620	4490	4510	4630
5_	Nominal torque (max. continuous torque)	mNm	5.06	10.0	11.6	10.8	10.9	10.7
6_	Nominal current (max. continuous current)	A	1.20	1.20	0.89	0.625	0.42	0.316
7_	Stall torque	mNm	34.4	39.3	41.8	36.6	37.3	36.6
8_	Stall current	A	7.73	4.57	3.14	2.06	1.40	1.06
9_	Max. efficiency	%	83	84	84	83	84	83
10_	Terminal resistance	Ω	0.388	1.31	2.87	5.82	12.9	22.7
11_	Terminal inductance	mH	0.026	0.096	0.231	0.411	0.925	1.56
12_	Torque constant	mNm/A	4.44	8.59	13.3	17.8	26.7	34.7
13_	Speed constant	rpm/V	2150	1110	716	537	358	276
14_	Speed/torque gradient	rpm/mNm	188	170	154	176	173	181
15_	Mechanical time constant	ms	4.29	4.20	4.18	4.19	4.22	4.23
16_	Rotor inertia	gcm ²	2.18	2.36	2.59	2.28	2.33	2.23

Thermal data

17_	Thermal resistance housing-ambient	K/W	17.9
18_	Thermal resistance winding-housing	K/W	7.21
19_	Thermal time constant winding	s	21.5
20_	Thermal time constant motor	s	294
21_	Ambient temperature ball bearings	°C	-40...+85
21_	Ambient temperature sleeve bearings	°C	-30...+85
22_	Max. winding temperature	°C	100

Operating Range

n [rpm] Winding 9 V

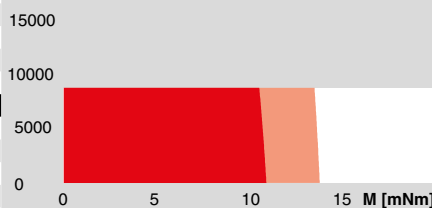

■ Continuous operation
 ■ Continuous operation with reduced thermal resistance R_{th2} 50%
 ■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	8680
24_	Axial play	mm	0...0.1
	Preload	N	0.8
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.8
27_	Max. force for press fits (static)	N	18
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	10 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	8680
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	60
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	2 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
286_GPX 16 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
287_GPX 16 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
288_GPX 16 HP	2-3 [4]	381_ENX 16 EASY	434_EPOS2 24/2 (DCX)
290_GPX 19 A/C	3-4	382_ENX 16 EASY Abs.	434_EPOS2 Module 36/2
291_GPX 19 LN/LZ	3-4		438_EPOS2 P 24/5
292_GPX 19 HP	4		441_EPOS4 Module/Comp. 24/1.5
			447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		7
31_	Weight of motor	g	42
32_	Typical noise level	dBA	44

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com


DCX 16 L Graphite Brushes

DC motor Ø16 mm

Key Data: 10/19 W, 11.7 mNm, 17000 rpm



maxon DCX

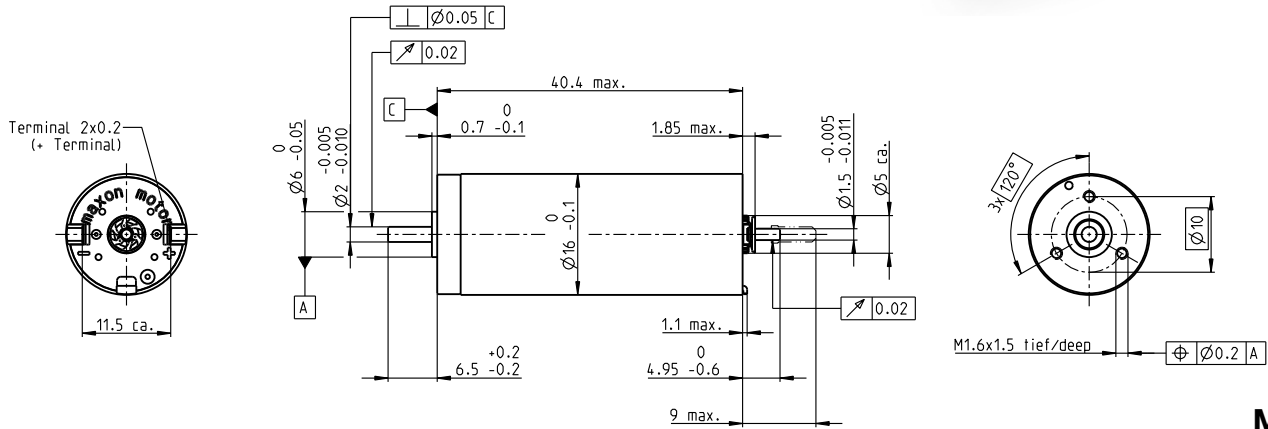

M 1:1

Motor Data


1_	Nominal voltage	V	6	9	12	18	24	36
2_	No load speed	rpm	12800	13100	13200	12800	12800	12800
3_	No load current	mA	73.5	50.7	38.6	24.5	18.4	12.3
4_	Nominal speed	rpm	11000	11000	10700	10600	10600	10700
5_	Nominal torque (max. continuous torque)	mNm	8.58	11.8	10.4	11.6	11.3	11.6
6_	Nominal current (max. continuous current)	A	2.00	1.85	1.24	0.896	0.651	0.447
7_	Stall torque	mNm	61.8	74.2	63.3	74.5	68.5	72
8_	Stall current	A	13.9	11.4	7.37	5.59	3.85	2.70
9_	Max. efficiency	%	85	87	83	86	86	87
10_	Terminal resistance	Ω	0.431	0.791	1.63	3.22	6.23	13.3
11_	Terminal inductance	mH	0.026	0.055	0.096	0.231	0.411	0.925
12_	Torque constant	mNm/A	4.44	6.52	8.59	13.3	17.8	26.7
13_	Speed constant	rpm/V	2150	1470	1110	716	537	358
14_	Speed/torque gradient	rpm/mNm	209	178	211	173	188	179
15_	Mechanical time constant	ms	4.77	4.47	5.21	4.70	4.48	4.37
16_	Rotor inertia	gcm ²	2.18	2.40	2.36	2.59	2.28	2.33

Thermal data

17_	Thermal resistance housing-ambient	K/W	17.9
18_	Thermal resistance winding-housing	K/W	7.21
19_	Thermal time constant winding	s	21.5
20_	Thermal time constant motor	s	294
21_	Ambient temperature ball bearings	°C	-40...+100
21_	Ambient temperature sleeve bearings	°C	-30...+100
22_	Max. winding temperature	°C	125

Operating Range

n [rpm] Winding 12 V

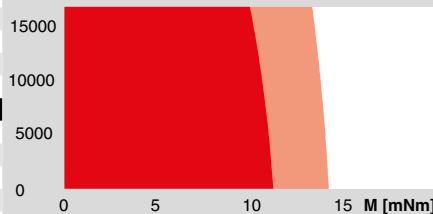

■ Continuous operation
 ■ Continuous operation with reduced thermal resistance R_{th2} 50%
 □ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	17000
24_	Axial play	mm	0...0.1
	Preload	N	0.8
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.8
27_	Max. force for press fits (static)	N	18
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	10 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	15000
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.015
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	60
	(static, shaft supported)	N	300
28_	Max. radial load [mm from flange]	N	2 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
286_GPX 16 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
287_GPX 16 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
288_GPX 16 HP	2-3 [4]	381_ENX 16 EASY	434_EPOS2 24/2 (DCX)
290_GPX 19 A/C	3-4	382_ENX 16 EASY Abs.	434_EPOS2 Module 36/2
291_GPX 19 LN/LZ	3-4		438_EPOS2 P 24/5
292_GPX 19 HP	4		441_EPOS4 Module/Comp. 24/1.5
			442_EPOS4 Module/Comp. 50/5
			447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		7
31_	Weight of motor	g	42
32_	Typical noise level	dBA	40

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098


www.electromate.com

sales@electromate.com

DCX 19 S Precious Metal Brushes

DC motor Ø19 mm

Key Data: 5/8 W, 11.0 mNm, 7500 rpm

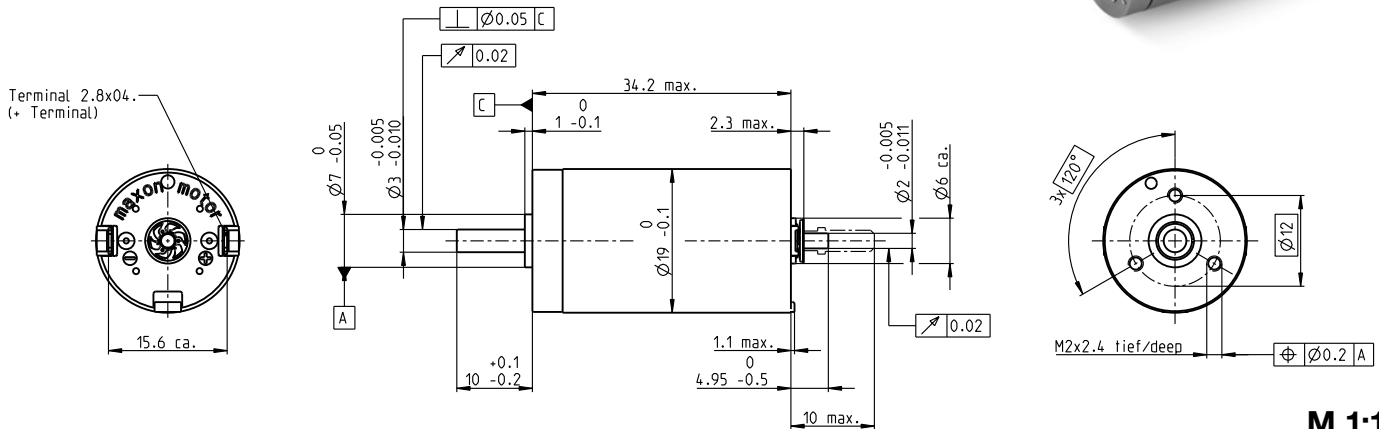

M 1:1

Motor Data


1_	Nominal voltage	V	4.5	6	9	12	18	24
2_	No load speed	rpm	6440	6350	6260	6360	6360	6350
3_	No load current	mA	72	53	34.6	26.5	17.7	13.2
4_	Nominal speed	rpm	5080	4540	4350	4490	4490	4480
5_	Nominal torque (max. continuous torque)	mNm	7.46	10.3	10.8	11.0	11.0	10.9
6_	Nominal current (max. continuous current)	A	1.20	1.20	0.829	0.643	0.428	0.319
7_	Stall torque	mNm	35.7	36.3	35.8	38.0	37.8	37.5
8_	Stall current	A	5.42	4.07	2.64	2.13	1.41	1.05
9_	Max. efficiency	%	78	79	79	79	79	79
10_	Terminal resistance	Ω	0.831	1.47	3.40	5.63	12.7	22.8
11_	Terminal inductance	mH	0.045	0.082	0.191	0.329	0.740	1.320
12_	Torque constant	mNm/A	6.58	8.90	13.5	17.8	26.7	35.6
13_	Speed constant	rpm/V	1450	1070	705	536	358	268
14_	Speed/torque gradient	rpm/mNm	183	177	177	170	170	172
15_	Mechanical time constant	ms	5.12	4.99	4.92	4.89	4.89	4.90
16_	Rotor inertia	gcm ²	2.67	2.68	2.65	2.75	2.74	2.72

Thermal data

17_	Thermal resistance housing-ambient	K/W	17.6
18_	Thermal resistance winding-housing	K/W	6.5
19_	Thermal time constant winding	s	11.6
20_	Thermal time constant motor	s	312
21_	Ambient temperature ball bearings	°C	-40...+85
21_	Ambient temperature sleeve bearings	°C	-30...+85
22_	Max. winding temperature	°C	100

Operating Range

n [rpm] Winding 9 V

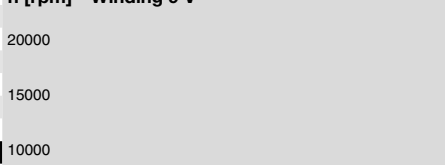

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	7500
24_	Axial play	mm	0...0.1
	Preload	N	2.5
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	2.5
27_	Max. force for press fits (static)	N	30
	(static, shaft supported)	N	440
28_	Max. radial load [mm from flange]	N	16 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	7500
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	80
	(static, shaft supported)	N	440
28_	Max. radial load [mm from flange]	N	3 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
290_GPX 19 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
291_GPX 19 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
292_GPX 19 HP	2-3 [4]	381_ENX 16 EASY	434_EPOS2 24/2 (DCX)
294_GPX 22 A/C	3-4	382_ENX 16 EASY Abs.	434_EPOS2 Module 36/2
295_GPX 22 LN/LZ	3-4		438_EPOS2 P 24/5
296_GPX 22 HP	4		441_EPOS4 Module/Comp. 24/1.5
			447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		9
31_	Weight of motor	g	50
32_	Typical noise level	dBA	48

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com


DCX 19 S Graphite Brushes

DC motor Ø19 mm

Key Data: 11/17 W, 11.3 mNm, 16000 rpm



maxon DCX

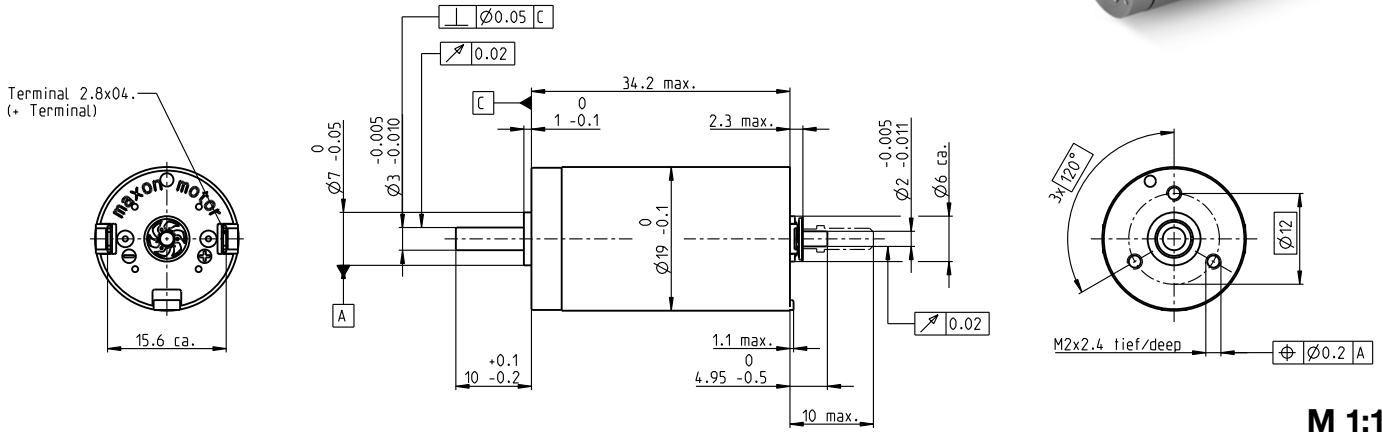

M 1:1

Motor Data


1_	Nominal voltage	V	9	12	18	24	36	48
2_	No load speed	rpm	12900	12800	12600	12700	12700	12700
3_	No load current	mA	102	75	48.9	37.4	25	18.7
4_	Nominal speed	rpm	10900	10800	10600	10600	10700	10700
5_	Nominal torque (max. continuous torque)	mNm	11.3	11.4	11.4	11.1	11.3	11.3
6_	Nominal current (max. continuous current)	A	1.81	1.35	0.884	0.657	0.445	0.335
7_	Stall torque	mNm	73.8	73.9	72.2	73.2	73.9	73.8
8_	Stall current	A	11.2	8.30	5.33	4.11	2.77	2.07
9_	Max. efficiency	%	82	82	82	81	82	82
10_	Terminal resistance	Ω	0.802	1.45	3.38	5.84	13.0	23.2
11_	Terminal inductance	mH	0.045	0.082	0.191	0.329	0.740	1.320
12_	Torque constant	mNm/A	6.58	8.90	13.5	17.8	26.7	35.6
13_	Speed constant	rpm/V	1450	1070	705	536	358	268
14_	Speed/torque gradient	rpm/mNm	177	174	176	176	174	174
15_	Mechanical time constant	ms	4.94	4.90	4.88	5.07	5.00	4.97
16_	Rotor inertia	gcm ²	2.67	2.68	2.65	2.75	2.74	2.72

Thermal data

17_	Thermal resistance housing-ambient	K/W	17.6
18_	Thermal resistance winding-housing	K/W	6.5
19_	Thermal time constant winding	s	11.6
20_	Thermal time constant motor	s	312
21_	Ambient temperature ball bearings	°C	-40...+100
21_	Ambient temperature sleeve bearings	°C	-30...+100
22_	Max. winding temperature	°C	125

Operating Range

n [rpm] Winding 18 V

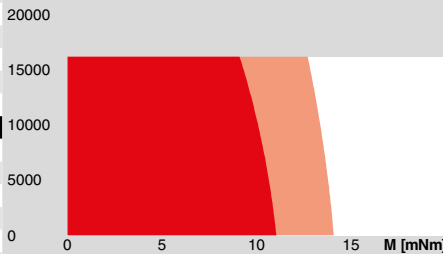

■ Continuous operation
 ■ Continuous operation with reduced thermal resistance R_{th2} 50%
 □ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	16000
24_	Axial play	mm	0...0.1
	Preload	N	2.5
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	2.5
27_	Max. force for press fits (static)	N	30
	(static, shaft supported)	N	440
28_	Max. radial load [mm from flange]	N	16 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	13500
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	80
	(static, shaft supported)	N	440
28_	Max. radial load [mm from flange]	N	3 [5]

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
290_GPX 19 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
291_GPX 19 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
292_GPX 19 HP	2-3 [4]	381_ENX 16 EASY	427_ESCON Module 50/5
294_GPX 22 A/C	3-4	382_ENX 16 EASY Abs.	428_ESCON 50/5
295_GPX 22 LN/LZ	3-4		434_EPOS2 24/2 (DCX)
296_GPX 22 HP	4		434_EPOS2 Module 36/2
			435_EPOS2 50/5
			438_EPOS2 P 24/5
			441_EPOS4 Module/Comp. 24/1.5
			442_EPOS4 Module/Comp. 50/5
			447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		9
31_	Weight of motor	g	50
32_	Typical noise level	dBA	40

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com


sales@electromate.com

DCX 22 S Precious Metal Brushes

DC motor Ø22 mm



Key Data: 6/10 W, 14.5 mNm, 7160 rpm

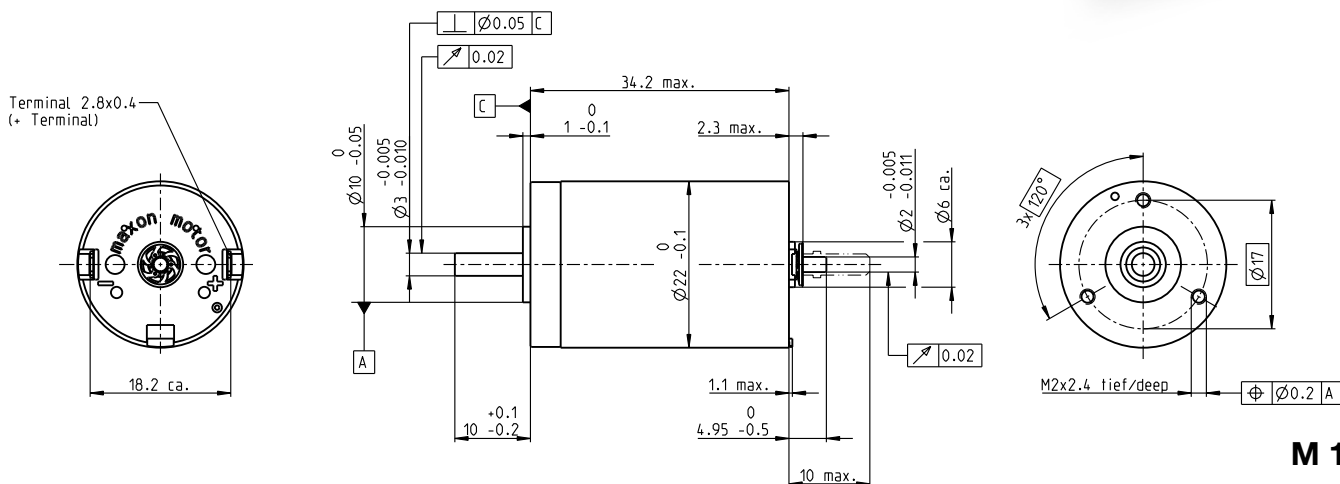

M 1:1

Motor Data

1_	Nominal voltage	V	6	12	18	24	36	48
2_	No load speed	rpm	6200	6200	6110	6340	6550	5890
3_	No load current	mA	39.2	19.6	12.8	10.1	7.09	4.55
4_	Nominal speed	rpm	4960	4670	4560	4700	4940	4240
5_	Nominal torque (max. continuous torque)	mNm	10.7	14.7	14.5	13.6	13.8	13.6
6_	Nominal current (max. continuous current)	A	1.20	0.817	0.531	0.388	0.272	0.180
7_	Stall torque	mNm	53.7	59.7	57.5	52.7	56.5	48.6
8_	Stall current	A	5.85	3.25	2.06	1.47	1.08	0.63
9_	Max. efficiency	%	84	85	85	84	85	84
10_	Terminal resistance	Ω	1.02	3.69	8.75	16.3	33.3	76.2
11_	Terminal inductance	mH	0.058	0.231	0.535	0.881	1.86	4.08
12_	Torque constant	mNm/A	9.18	18.4	28.0	35.9	52.2	77.2
13_	Speed constant	rpm/V	1040	520	342	266	183	124
14_	Speed/torque gradient	rpm/mNm	116	104	107	121	117	122
15_	Mechanical time constant	ms	6.14	6.07	6.09	5.93	6.15	6.19
16_	Rotor inertia	gcm ²	5.05	5.55	5.44	4.67	5.03	4.84

Thermal data

17_	Thermal resistance housing-ambient	K/W	16	Operating Range				
18_	Thermal resistance winding-housing	K/W	7	n [rpm]	Winding 18 V			
19_	Thermal time constant winding	s	20	20000				
20_	Thermal time constant motor	s	528	15000				
21_	Ambient temperature ball bearings	°C	-40...85	10000				
21_	Ambient temperature sleeve bearings	°C	-30...85	5000				
22_	Max. winding temperature	°C	100	0				

Mechanical data ball bearings

23_	Max. speed	rpm	7160	
24_	Axial play	mm	0...0.1	
25_	Radial play	mm	0.02	
26_	Max. axial load (dynamic)	N	2.5	
27_	Max. force for press fits (static)	N	30	
27_	(static, shaft supported)	N	440	
28_	Max. radial load [mm from flange]	N	16 [5]	
28_	Max. radial load [mm from flange]	N	16 [5]	

Mechanical data sleeve bearings

23_	Max. speed	rpm	7160	maxon Modular System		
24_	Axial play	mm	0...0.2	maxon gear	Stages [opt.]	maxon sensor
24_	Preload	N	0	294_GPX 22 A/C	1-2 [3-4]	379_ENX 10 EASY
25_	Radial play	mm	0.02	295_GPX 22 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD
26_	Max. axial load (dynamic)	N	0.1	296_GPX 22 HP	2-3 [4]	381_ENX 16 EASY
27_	Max. force for press fits (static)	N	80	298_GPX 26 A/C	3	382_ENX 16 EASY Abs.
27_	(static, shaft supported)	N	440	299_GPX 26 LN/LZ	3	409_ENC SCH16F
28_	Max. radial load [mm from flange]	N	3 [5]	300_GPX 26 HP	4	414_ENC 30 HEDS 5540
						418_ENC 30 HEDL 5540
						412_ENC AEDL 5810

Other specifications

29_	Number of pole pairs		1	maxon motor control		
30_	Number of commutator segments		9	426_ESCON Module 24/2		
31_	Weight of motor	g	66	426_ESCON 36/2 DC		
32_	Typical noise level	dBA	48	427_ESCON Module 50/5		
				428_ESCON 50/5		
				434_EPOS2 24/2 (DCX)		
				434_EPOS2 Module 36/2		
				435_EPOS2 50/5		
				438_EPOS2 P 24/5		
				441_EPOS4 Module/Comp. 24/1.5		
				442_EPOS4 Module/Comp. 50/5		
				447_MAXPOS 50/5		

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with or without CLL/graphite brushes/EMI filter
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:

Toll Free Phone (877) SERV098
www.electromate.com
sales@electromate.com


DCX 22 S Graphite Brushes

DC motor Ø22 mm



maxon DCX

Key Data: 14/24 W, 15.3 mNm, 18000 rpm

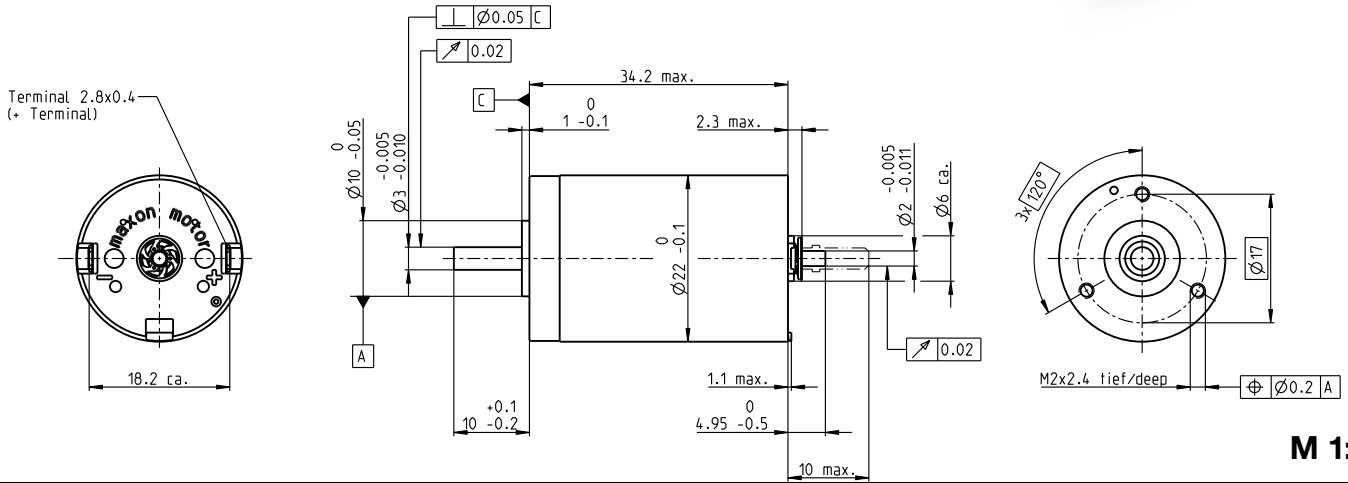

M 1:1

Motor Data


1_	Nominal voltage	V	6	12	18	24	36	48
2_	No load speed	rpm	11400	12400	12400	12400	12200	12700
3_	No load current	mA	126	71.7	47.8	35.9	23.4	18.5
4_	Nominal speed	rpm	9700	10700	10800	10800	10500	10900
5_	Nominal torque (max. continuous torque)	mNm	14.4	14.6	14.9	15.3	14.8	14.0
6_	Nominal current (max. continuous current)	A	3.00	1.65	1.12	0.869	0.552	0.406
7_	Stall torque	mNm	101	108	112	120	113	104
8_	Stall current	A	20.2	11.8	8.15	6.51	4.03	2.90
9_	Max. efficiency	%	85	85	85	86	85	84
10_	Terminal resistance	Ω	0.297	1.02	2.21	3.69	8.94	16.6
11_	Terminal inductance	mH	0.017	0.058	0.130	0.231	0.535	0.881
12_	Torque constant	mNm/A	5.01	9.18	13.8	18.4	28.0	35.9
13_	Speed constant	rpm/V	1910	1040	693	520	342	266
14_	Speed/torque gradient	rpm/mNm	113	116	111	104	109	123
15_	Mechanical time constant	ms	6.23	6.12	6.08	6.07	6.22	6.01
16_	Rotor inertia	gcm ²	5.27	5.05	5.22	5.55	5.44	4.67

Thermal data

17_	Thermal resistance housing-ambient	K/W	16
18_	Thermal resistance winding-housing	K/W	7
19_	Thermal time constant winding	s	20
20_	Thermal time constant motor	s	528
21_	Ambient temperature ball bearings	°C	-40...+100
21_	Ambient temperature sleeve bearings	°C	-30...+100
22_	Max. winding temperature	°C	125

Operating Range

n [rpm] Winding 18 V

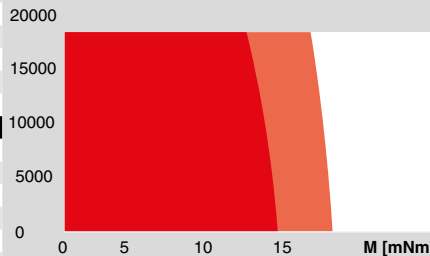

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	18000
24_	Axial play	mm	0...0.1
	Preload	N	2.5
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	2.5
27_	Max. force for press fits (static)	N	30
	(static, shaft supported)	N	440
28_	Max. radial load [mm from flange]	N	16 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	18000
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	80
	(static, shaft supported)	N	440
28_	Max. radial load [mm from flange]	N	3 [5]

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		9
31_	Weight of motor	g	66
32_	Typical noise level	dBA	41

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
294_GPX 22 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
295_GPX 22 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
296_GPX 22 HP	2-3 [4]	381_ENX 16 EASY	427_ESCON Module 50/5
298_GPX 26 A/C	3	382_ENX 16 EASY Abs.	428_ESCON 50/5
299_GPX 26 LN/LZ	3	409_ENC SCH16F	434_EPOS2 24/2 (DCX)
300_GPX 26 HP	4	414_ENC 30 HEDS 5540	434_EPOS2 Module 36/2
		418_ENC 30 HEDL 5540	435_EPOS2 24/5, EPOS2 50/5
		412_ENC AEDL 5810	438_EPOS2 P 24/5
			441_EPOS4 Module/Comp. 24/1.5
			442_EPOS4 Module/Comp. 50/5
			447_MAXPOS 50/5

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with or without CLL/graphite brushes/EMI filter
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com


sales@electromate.com

DCX 22 L Precious Metal Brushes

DC motor Ø22 mm



Key Data: 11/20 W, 29.8 mNm, 7160 rpm

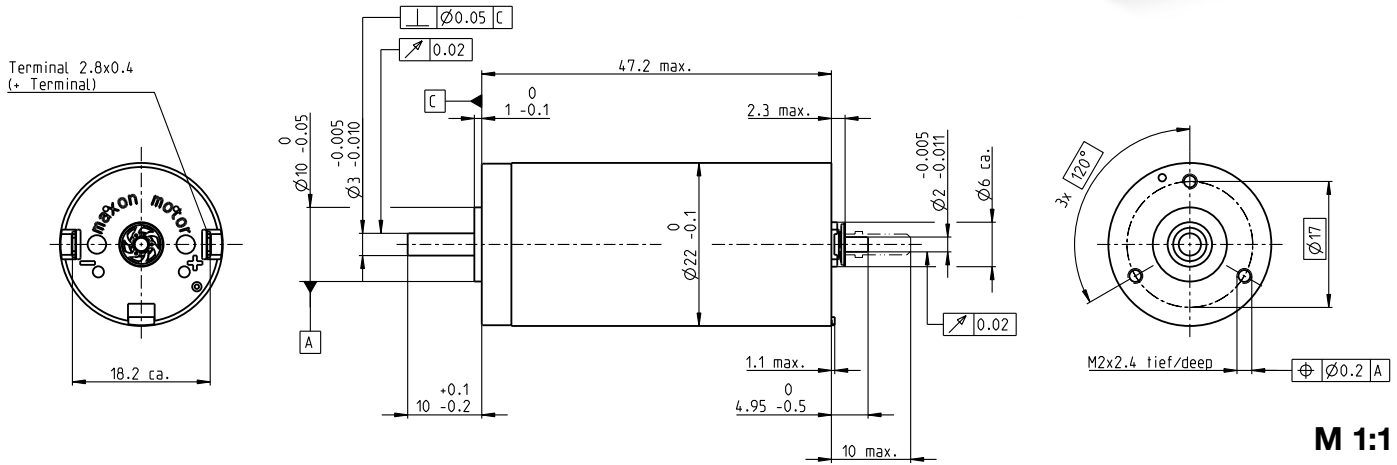

M 1:1

Motor Data

1_	Nominal voltage	V	6	9	12	18	24	36	48
2_	No load speed	rpm	5870	5870	4980	5740	5060	6020	5220
3_	No load current	mA	51.0	34	20.0	16.4	10.2	8.82	5.36
4_	Nominal speed	rpm	5380	5210	4000	4780	4070	5040	4180
5_	Nominal torque (max. continuous torque)	mNm	14.1	21.4	29.5	29.8	29.2	29.2	27.8
6_	Nominal current (max. continuous current)	A	1.50	1.50	1.30	1.01	0.655	0.520	0.322
7_	Stall torque	mNm	170	191	150	178	150	180	140
8_	Stall current	A	17.5	13.1	6.54	5.97	3.31	3.16	1.60
9_	Max. efficiency	%	89	90	89	90	89	90	89
10_	Terminal resistance	Ω	0.343	0.687	1.84	3.01	7.25	11.4	29.9
11_	Terminal inductance	mH	0.035	0.078	0.192	0.326	0.746	1.19	2.80
12_	Torque constant	mNm/A	9.73	14.6	22.9	29.9	45.2	57.0	87.6
13_	Speed constant	rpm/V	981	654	416	320	211	168	109
14_	Speed/torque gradient	rpm/mNm	34.6	30.8	33.3	32.2	33.9	33.5	37.3
15_	Mechanical time constant	ms	3.28	3.17	3.14	3.13	3.14	3.14	3.17
16_	Rotor inertia	gcm ²	9.06	9.82	9.00	9.26	8.85	8.94	8.12

Thermal data

17_	Thermal resistance housing-ambient	K/W	13.6	Operating Range						
18_	Thermal resistance winding-housing	K/W	4.57	n [rpm] Winding 18 V						
19_	Thermal time constant winding	s	22	20000						
20_	Thermal time constant motor	s	646	15000						
21_	Ambient temperature ball bearings	°C	-40...+85	10000						
21_	Ambient temperature sleeve bearings	°C	-30...+85	5000						
22_	Max. winding temperature	°C	100	0						

Mechanical data ball bearings

23_	Max. speed	rpm	7160	
24_	Axial play	mm	0...0.1	
25_	Radial play	mm	0.02	
26_	Max. axial load (dynamic)	N	2.5	
27_	Max. force for press fits (static)	N	30	
27_	(static, shaft supported)	N	440	
28_	Max. radial load [mm from flange]	N	16 [5]	
28_	Max. radial load [mm from flange]	N	3 [5]	

Mechanical data sleeve bearings

23_	Max. speed	rpm	7160	maxon Modular System		
24_	Axial play	mm	0...0.2	maxon gear	Stages [opt.]	maxon sensor
24_	Preload	N	0	294_GPX 22 A/C	1-2 [3-4]	379_ENX 10 EASY
25_	Radial play	mm	0.02	295_GPX 22 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD
26_	Max. axial load (dynamic)	N	0.1	296_GPX 22 HP	2-3 [4]	381_ENX 16 EASY
27_	Max. force for press fits (static)	N	80	298_GPX 26 A/C	3	382_ENX 16 EASY Abs.
27_	(static, shaft supported)	N	440	299_GPX 26 LN/LZ	3	409_ENC SCH16F
28_	Max. radial load [mm from flange]	N	3 [5]	300_GPX 26 HP	4	414_ENC 30 HEDS 5540
						418_ENC 30 HEDL 5540
						412_ENC AEDL 5810

Other specifications

29_	Number of pole pairs		1	maxon motor control		
30_	Number of commutator segments		9	426_ESCON Module 24/2		
31_	Weight of motor	g	95	426_ESCON 36/2 DC		
32_	Typical noise level	dBA	52	427_ESCON Module 50/5		
				428_ESCON 50/5		
				434_EPOS2 24/2 (DCX)		
				434_EPOS2 Module 36/2		
				435_EPOS2 50/5		
				438_EPOS2 P 24/5		
				441_EPOS4 Module/Comp. 24/1.5		
				442_EPOS4 Module/Comp. 50/5		
				447_MAXPOS 50/5		

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with or without CLL/graphite brushes/EMI filter
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:

Toll Free Phone (877) SERV098
 www.electromate.com
 sales@electromate.com


DCX 22 L Graphite Brushes

DC motor Ø22 mm

Key Data: 20/49 W, 32.2 mNm, 18000 rpm



maxon DCX

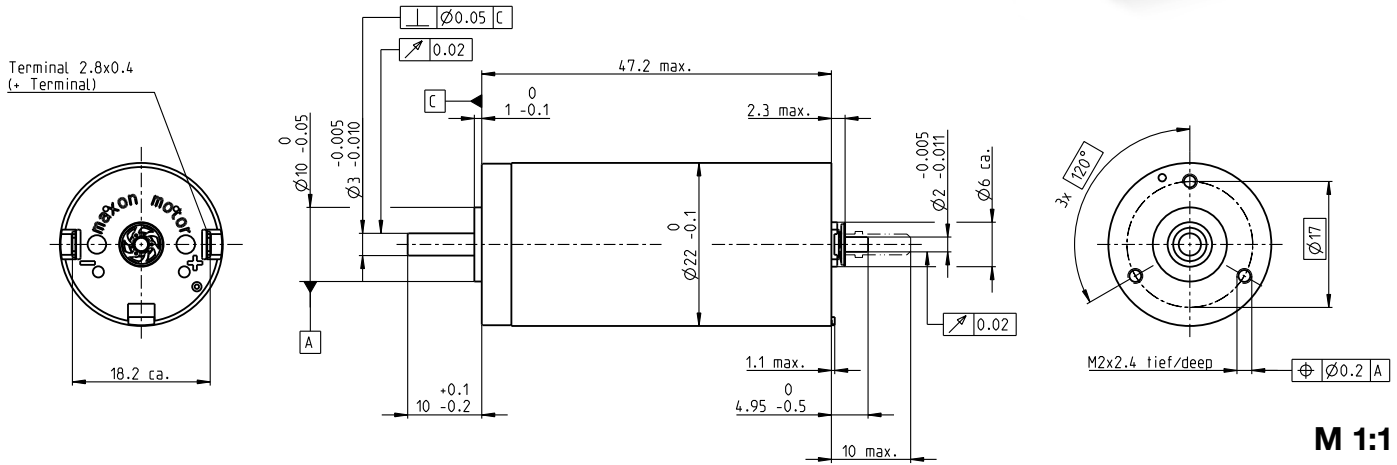

M 1:1

Motor Data


1_	Nominal voltage	V	9	12	18	24	36	48
2_	No load speed	rpm	12300	11700	11800	9970	11400	10100
3_	No load current	mA	118	81.8	54.6	31.8	26.3	16.2
4_	Nominal speed	rpm	11400	10700	10800	8920	10400	9020
5_	Nominal torque (max. continuous torque)	mNm	27.0	30.5	32.2	31.5	30.0	30.3
6_	Nominal current (max. continuous current)	A	4.00	3.21	2.26	1.40	1.03	0.687
7_	Stall torque	mNm	371	348	386	301	346	294
8_	Stall current	A	53.4	35.8	26.5	13.1	11.6	6.50
9_	Max. efficiency	%	90	91	91	90	90	90
10_	Terminal resistance	Ω	0.168	0.335	0.680	1.83	3.11	7.39
11_	Terminal inductance	mH	0.018	0.035	0.078	0.192	0.326	0.746
12_	Torque constant	mNm/A	6.95	9.73	14.6	22.9	29.9	45.2
13_	Speed constant	rpm/V	1370	981	654	416	320	211
14_	Speed/torque gradient	rpm/mNm	33.3	33.8	30.5	33.2	33.3	34.6
15_	Mechanical time constant	ms	3.27	3.21	3.13	3.13	3.23	3.20
16_	Rotor inertia	gcm ²	9.37	9.06	9.82	9.00	9.26	8.85

Thermal data

17_	Thermal resistance housing-ambient	K/W	13.6
18_	Thermal resistance winding-housing	K/W	4.57
19_	Thermal time constant winding	s	22
20_	Thermal time constant motor	s	646
21_	Ambient temperature ball bearings	°C	-40...+100
21_	Ambient temperature sleeve bearings	°C	-30...+100
22_	Max. winding temperature	°C	125

Operating Range

n [rpm] Winding 18 V

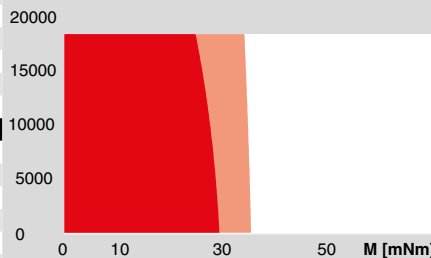

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	18000
24_	Axial play	mm	0...0.1
	Preload	N	2.5
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	2.5
27_	Max. force for press fits (static)	N	30
	(static, shaft supported)	N	440
28_	Max. radial load [mm from flange]	N	16 [5]

Mechanical data sleeve bearings

23_	Max. speed	rpm	18000
24_	Axial play	mm	0...0.2
	Preload	N	0
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	0.1
27_	Max. force for press fits (static)	N	80
	(static, shaft supported)	N	440
28_	Max. radial load [mm from flange]	N	3 [5]

maxon Modular System

23_	Max. speed	rpm	18000	maxon gear	Stages [opt.]	maxon sensor	maxon motor control
24_	Axial play	mm	0...0.2	294_GPX 22 A/C	1-2 [3-4]	379_ENX 10 EASY	426_ESCON Module 24/2
	Preload	N	0	295_GPX 22 LN/LZ	1-2 [3-4]	379_ENX 10 QUAD	426_ESCON 36/2 DC
25_	Radial play	mm	0.02	296_GPX 22 HP	2-3 [4]	381_ENX 16 EASY	427_ESCON Module 50/5
26_	Max. axial load (dynamic)	N	0.1	298_GPX 26 A/C	3	382_ENX 16 EASY Abs.	428_ESCON 50/5
27_	Max. force for press fits (static)	N	80	299_GPX 26 LN/LZ	3	409_ENC SCH16F	434_EPOS2 24/2 (DCX)
	(static, shaft supported)	N	440	300_GPX 26 HP	4	414_ENC 30 HEDS 5540	434_EPOS2 Module 36/2
28_	Max. radial load [mm from flange]	N	3 [5]			418_ENC 30 HEDL 5540	435_EPOS2 24/5, EPOS2 50/5
						412_ENC AEDL 5810	438_EPOS2 P 24/5
29_	Number of pole pairs		1				441_EPOS4 Module/Comp. 24/1.5
30_	Number of commutator segments		9				442_EPOS4 Module/Comp. 50/5
31_	Weight of motor	g	95				447_MAXPOS 50/5
32_	Typical noise level	dB(A)	44				

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		9
31_	Weight of motor	g	95
32_	Typical noise level	dB(A)	44

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with or without CLL/graphite brushes/EMI filter
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098


www.electromate.com

sales@electromate.com

DCX 26 L Precious Metal Brushes


DC motor Ø26 mm

Key Data: 18/29 W, 52.3 mNm, 5900 rpm

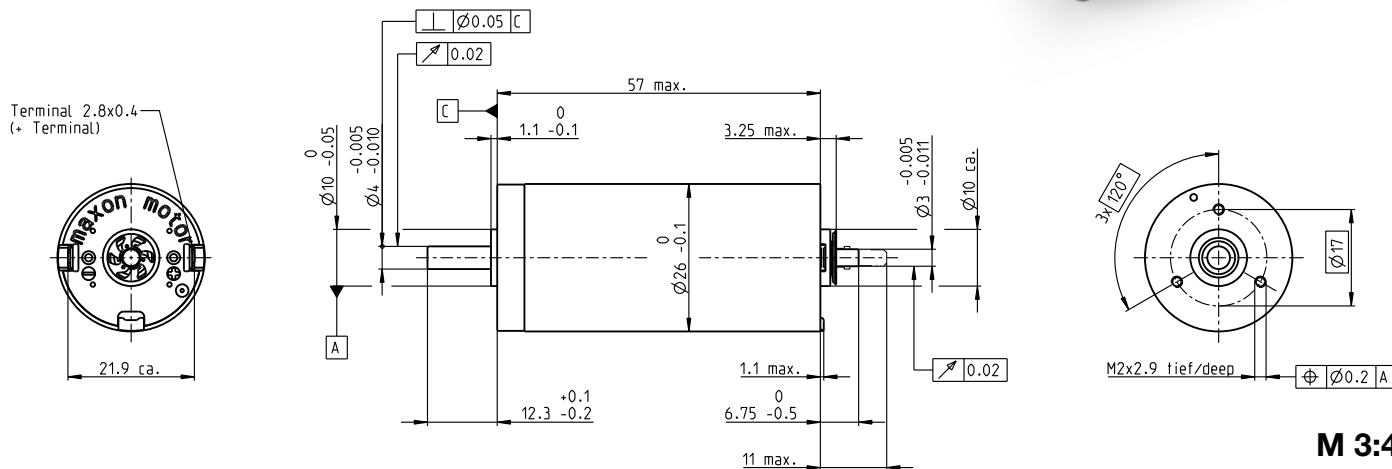

Motor Data								
1_	Nominal voltage	V	9	12	18	24	36	48
2_	No load speed	rpm	5530	5330	5530	5330	5430	5320
3_	No load current	mA	80.5	56.8	40.2	28.4	19.5	14.2
4_	Nominal speed	rpm	5060	4690	4770	4600	4680	4570
5_	Nominal torque (max. continuous torque)	mNm	32.9	46.1	49.8	52.3	50.8	50.3
6_	Nominal current (max. continuous current)	A	2.2	2.2	1.64	1.25	0.822	0.599
7_	Stall torque	mNm	384	384	362	384	370	355
8_	Stall current	A	24.8	17.9	11.7	8.95	5.86	4.14
9_	Max. efficiency	%	89	89	89	89	89	89
10_	Terminal resistance	Ω	0.363	0.671	1.54	2.68	6.15	11.6
11_	Terminal inductance	mH	0.067	0.129	0.268	0.514	1.11	2.06
12_	Torque constant	mNm/A	15.5	21.4	31	42.9	63.2	85.8
13_	Speed constant	rpm/V	616	445	308	223	151	111
14_	Speed/torque gradient	rpm/mNm	14.4	13.9	15.3	13.9	14.7	15
15_	Mechanical time constant	ms	3.23	3.13	3.11	3.09	3.1	3.11
16_	Rotor inertia	gcm ²	21.3	21.4	19.4	21.2	20.1	19.7

Thermal data			Operating Range	
17_	Thermal resistance housing-ambient	K/W	10.2	n [rpm] Winding 18 V
18_	Thermal resistance winding-housing	K/W	3.01	
19_	Thermal time constant winding	s	24	
20_	Thermal time constant motor	s	620	
21_	Ambient temperature ball bearings	°C	-40...+85	
21_	Ambient temperature sleeve bearings	°C	-30...+85	
22_	Max. winding temperature	°C	100	

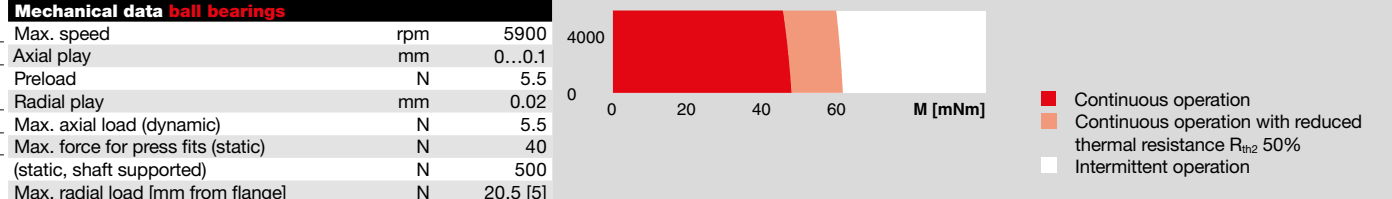

Mechanical data ball bearings			maxon Modular System				
23_	Max. speed	rpm	5900	maxon gear	Stages [opt.]	maxon sensor	maxon motor control
24_	Axial play	mm	0...0.1	298_GPX 26 A/C	1-2 [3]	379_ENX 10 EASY	426_ESCON 36/2 DC
	Preload	N	0	299_GPX 26 LN/LZ	1-2 [3]	379_ENX 10 QUAD	427_ESCON Module 50/5
25_	Radial play	mm	0.02	300_GPX 26 HP	2-3 [4]	381_ENX 16 EASY	428_ESCON 50/5
26_	Max. axial load (dynamic)	N	0.1	301_GPX 32 A/C	3	382_ENX 16 EASY Abs.	434_EPOS2 24/2 (DCX)
27_	Max. force for press fits (static)	N	80	302_GPX 32 LN/LZ	3	414_ENC 30 HEDS 5540	434_EPOS2 Module 36/2
	(static, shaft supported)	N	500	303_GPX 32 HP	4	418_ENC 30 HEDL 5540	435_EPOS2 24/5
28_	Max. radial load [mm from flange]	N	20.5 [5]			412_ENC AEDL 5810	435_EPOS2 50/5
							438_EPOS2 P 24/5
							441_EPOS4 Module/Comp. 24/1.5
							442_EPOS4 Module/Comp. 50/5
							447_MAXPOS 50/5

Other specifications			Configuration			
29_	Number of pole pairs	1	Bearing:	Ball bearings preloaded/sleeve bearings		
30_	Number of commutator segments	11	Commutation:	Precious metal brushes with CLL/graphite brushes		
31_	Weight of motor	g	Flange front/back:	Standard flange/configurable flange/no flange		
32_	Typical noise level	dBA	Shaft front/back:	Length/diameter/flat face		
			Electric connection:	Terminals or cable/alignment of connection/cable length/connector type		

Sold & Serviced By:

Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com


DCX 26 L Graphite Brushes

DC motor Ø26 mm

Key Data: 40/74 W, 59.8 mNm, 14400 rpm



maxon DCX

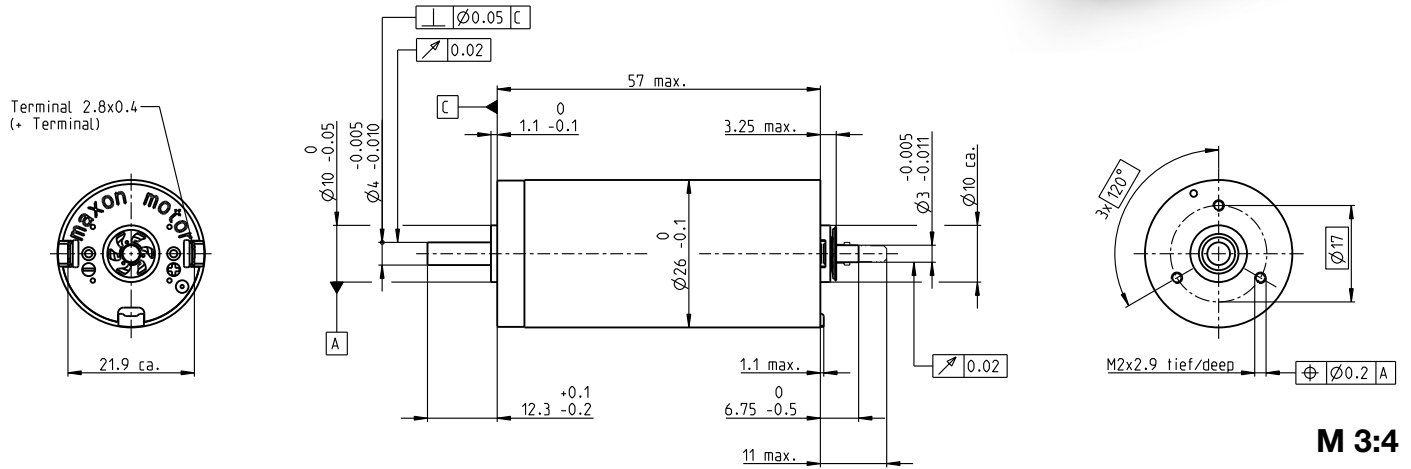

M 3:4

Motor Data


1_	Nominal voltage	V	12	18	24	36	48	60
2_	No load speed	rpm	10600	11100	10700	11100	10700	10900
3_	No load current	mA	131	93	65.7	46.5	32.9	27.3
4_	Nominal speed	rpm	9460	10000	9690	10000	9730	10000
5_	Nominal torque (max. continuous torque)	mNm	46.9	54.3	57.8	54	59.1	59.8
6_	Nominal current (max. continuous current)	A	4.5	3.59	2.76	1.79	1.41	1.17
7_	Stall torque	mNm	532	653	695	639	697	750
8_	Stall current	A	49.7	42.2	32.4	20.6	16.2	14.3
9_	Max. efficiency	%	88	90	91	90	91	91
10_	Terminal resistance	Ω	0.242	0.427	0.74	1.75	2.95	4.19
11_	Terminal inductance	mH	0.032	0.067	0.129	0.268	0.514	0.768
12_	Torque constant	mNm/A	10.7	15.5	21.4	31	42.9	52.4
13_	Speed constant	rpm/V	890	616	445	308	223	182
14_	Speed/torque gradient	rpm/mNm	20.1	17	15.4	17.4	15.3	14.6
15_	Mechanical time constant	ms	4.5	3.79	3.45	3.53	3.4	3.16
16_	Rotor inertia	gcm ²	21.4	21.3	21.4	19.4	21.2	20.7

Thermal data

17_	Thermal resistance housing-ambient	K/W	6.98
18_	Thermal resistance winding-housing	K/W	2.1
19_	Thermal time constant winding	s	43.9
20_	Thermal time constant motor	s	1030
21_	Ambient temperature ball bearings	°C	-40...+100
21_	Ambient temperature sleeve bearings	°C	155
22_	Max. winding temperature	°C	155

Operating Range

n [rpm] Winding 18 V

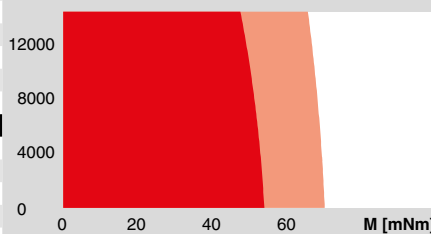

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	0...0.1
24_	Axial play	mm	7
	Preload	N	0.02
25_	Radial play	mm	7
26_	Max. axial load (dynamic)	N	22.6
27_	Max. force for press fits (static)	N	2510
	(static, shaft supported)	N	65.3 [5]
28_	Max. radial load [mm from flange]	N	

Mechanical data sleeve bearings

23_	Max. speed	rpm	11
24_	Axial play	mm	385
	Preload	N	48
25_	Radial play	mm	
26_	Max. axial load (dynamic)	N	
27_	Max. force for press fits (static)	N	
	(static, shaft supported)	N	
28_	Max. radial load [mm from flange]	N	

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
298_GPX 26 A/C	1-2 [3]	379_ENX 10 EASY	426_ESCON 36/2 DC
299_GPX 26 LN/LZ	1-2 [3]	379_ENX 10 QUAD	427_ESCON Module 50/5
300_GPX 26 HP	2-3 [4]	381_ENX 16 EASY	428_ESCON 50/5
301_GPX 32 A/C	3	382_ENX 16 EASY Abs.	434_EPOS2 24/2 (DCX)
302_GPX 32 LN/LZ	3	414_ENC 30 HEDS 5540	434_EPOS2 Module 36/2
303_GPX 32 HP	4	418_ENC 30 HEDL 5540	435_EPOS2 24/5
		412_ENC AEDL 5810	435_EPOS2 50/5
			438_EPOS2 P 24/5
			442_EPOS4 Module/Comp. 50/5
			447_MAXPOS 50/5

Other specifications

29_	Number of pole pairs		1
30_	Number of commutator segments		11
31_	Weight of motor	g	170
32_	Typical noise level	dBA	44

Configuration

Bearing: Ball bearings preloaded/sleeve bearings
 Commutation: Precious metal brushes with CLL/graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Motor specifications may vary for version with sintered bearing (max. winding temperature 125 °C).

Sold & Serviced By:



Toll Free Phone (877) SERV098


www.electromate.com

sales@electromate.com

DCX 32 L Graphite Brushes

DC motor Ø32 mm

Key Data: 70/110 W, 128 mNm, 11 300 rpm

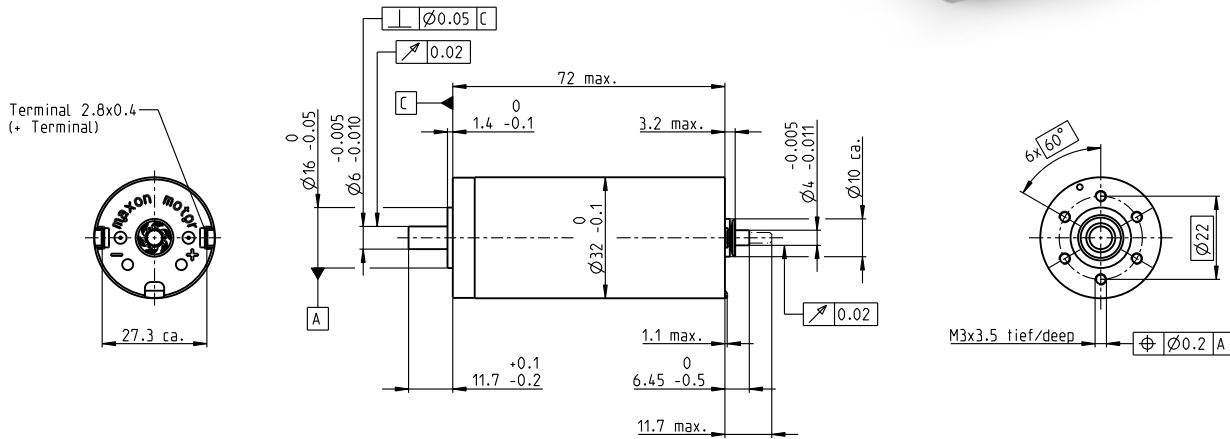

M 1:2

Motor Data


1_	Nominal voltage	V	12	18	24	36	48	60
2_	No load speed	rpm	7120	8630	8270	7940	7780	5840
3_	No load current	mA	274	234	164	103	75.2	41.6
4_	Nominal speed	rpm	6560	8070	7710	7410	7260	5290
5_	Nominal torque (max. continuous torque)	mNm	89.4	101	108	119	123	128
6_	Nominal current (max. continuous current)	A	6.00	5.42	4.12	2.87	2.17	1.35
7_	Stall torque	mNm	1730	2120	1980	2020	2000	1420
8_	Stall current	A	111	109	72.5	47.1	34.2	14.5
9_	Max. efficiency	%	85	88	88	90	90	89
10_	Terminal resistance	Ω	0.108	0.165	0.331	0.764	1.40	4.12
11_	Terminal inductance	mH	0.034	0.053	0.103	0.254	0.473	1.31
12_	Torque constant	mNm/A	15.6	19.5	27.3	42.9	58.5	97.5
13_	Speed constant	rpm/V	612	490	350	223	163	97.9
14_	Speed/torque gradient	rpm/mNm	4.24	4.15	4.24	3.96	3.92	4.14
15_	Mechanical time constant	ms	3.44	3.30	3.24	3.19	3.11	3.11
16_	Rotor inertia	gcm ²	77.6	75.9	72.8	76.8	75.9	71.7

Thermal data

17_	Thermal resistance housing-ambient	K/W	7.28
18_	Thermal resistance winding-housing	K/W	2.3
19_	Thermal time constant winding	s	42.2
20_	Thermal time constant motor	s	837
21_	Ambient temperature	°C	-40...+100
22_	Max. winding temperature	°C	155

Operating Range

n [rpm] Winding 36 V

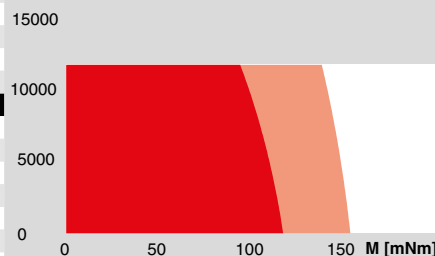

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	11 300
24_	Axial play	mm	0...0.1
	Preload	N	7
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	7
27_	Max. force for press fits (static) (static, shaft supported)	N	22.6
28_	Max. radial load [mm from flange]	N	2510
		N	65.3 [5]

Other specifications

29_	Number of pole pairs	1	
30_	Number of commutator segments	11	
31_	Weight of motor	g	325
32_	Typical noise level	dBA	47

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
301_GPX 32 A/C	1-2 [3]	379_ENX 10 EASY	427_ESCON Module 50/5
302_GPX 32 LN/LZ	1-2 [3]	379_ENX 10 QUAD	428_ESCON 50/5
303_GPX 32 HP	2-3 [4]	381_ENX 16 EASY	428_ESCON 70/10
304_GPX 37 A	3	382_ENX 16 EASY Abs.	435_EPOS2 24/5
305_GPX 37 LN/LZ	3	410_ENC 2RMHF	435_EPOS2 50/5
		414_ENC 30 HEDS 5540	435_EPOS2 70/10
		418_ENC 30 HEDL 5540	438_EPOS2 P 24/5
		412_ENC AEDL 5810	442_EPOS4 Module/Comp. 50/5
			443_EPOS4 Module/Comp. 50/8
			447_MAXPOS 50/5

Configuration

Bearing: Ball bearings preloaded
 Commutation: Graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com
sales@electromate.com


DCX 35 L Graphite Brushes

DC motor Ø35 mm

Key Data: 80/120 W, 138 mNm, 12300 rpm



maxon DCX

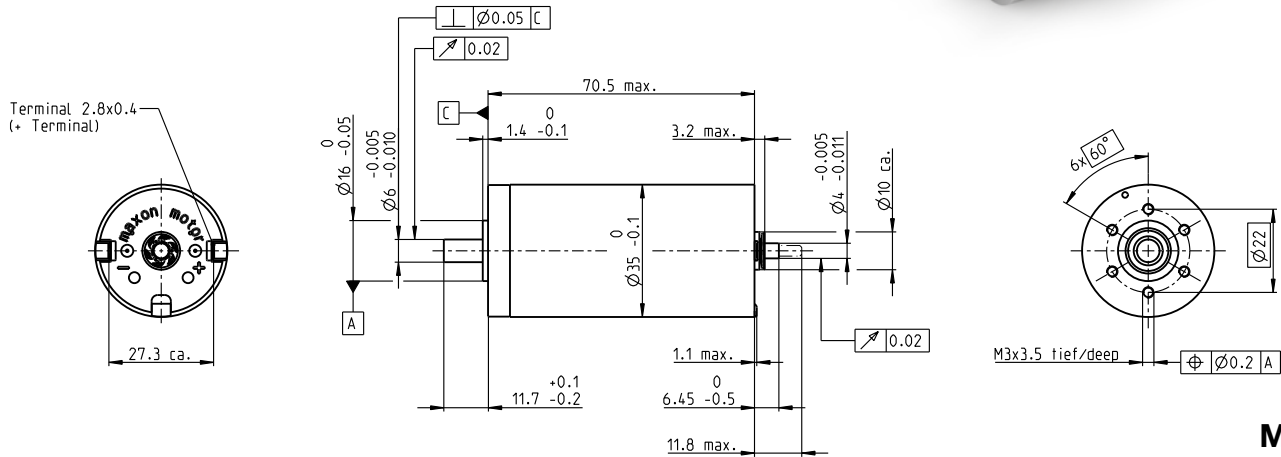

M 1:2

Motor Data


1_	Nominal voltage	V	12	18	24	36	48	60
2_	No load speed	rpm	8130	7200	7720	7940	6670	7690
3_	No load current	mA	320	177	146	101	58.6	57.5
4_	Nominal speed	rpm	7610	6640	7160	7410	6140	7160
5_	Nominal torque (max. continuous torque)	mNm	77.7	120	121	128	138	132
6_	Nominal current (max. continuous current)	A	6.00	5.32	4.26	3.07	2.08	1.84
7_	Stall torque	mNm	2080	1980	2030	2160	1860	2050
8_	Stall current	A	152	84.8	69.3	50.3	27.3	27.7
9_	Max. efficiency	%	85	88	89	90	90	90
10_	Terminal resistance	Ω	0.079	0.212	0.346	0.716	1.76	2.16
11_	Terminal inductance	mH	0.026	0.077	0.121	0.260	0.658	0.776
12_	Torque constant	mNm/A	13.7	23.4	29.3	42.9	68.3	74.1
13_	Speed constant	rpm/V	699	408	326	223	140	129
14_	Speed/torque gradient	rpm/mNm	4.04	3.70	3.86	3.72	3.61	3.76
15_	Mechanical time constant	ms	4.21	3.97	3.91	3.84	3.76	3.75
16_	Rotor inertia	gcm ²	99.5	102	96.6	98.7	99.5	95.2

Thermal data

17_	Thermal resistance housing-ambient	K/W	6.98
18_	Thermal resistance winding-housing	K/W	2.1
19_	Thermal time constant winding	s	43.9
20_	Thermal time constant motor	s	1030
21_	Ambient temperature	°C	-40...+100
22_	Max. winding temperature	°C	155

Operating Range

n [rpm] Winding 36 V

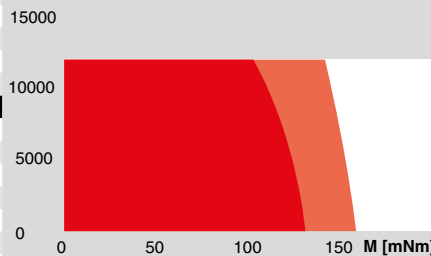

■ Continuous operation
■ Continuous operation with reduced thermal resistance R_{th2} 50%
■ Intermittent operation

Mechanical data ball bearings

23_	Max. speed	rpm	12300
24_	Axial play	mm	0...0.1
	Preload	N	7
25_	Radial play	mm	0.02
26_	Max. axial load (dynamic)	N	7
27_	Max. force for press fits (static) (static, shaft supported)	N	22.6 2510
28_	Max. radial load [mm from flange]	N	65.3 [5]

Other specifications

29_	Number of pole pairs	1	
30_	Number of commutator segments	11	
31_	Weight of motor	g	385
32_	Typical noise level	dBA	48

maxon Modular System

maxon gear	Stages [opt.]	maxon sensor	maxon motor control
304_GPX 37 A	1-2	379_ENX 10 EASY	427_ESCON Module 50/5
305_GPX 37 LN/LZ	1-2	379_ENX 10 QUAD	428_ESCON 50/5
306_GPX 42 C	1-4	381_ENX 16 EASY	428_ESCON 70/10
		382_ENX 16 EASY Abs.	435_EPOS2 24/5
		410_ENC 2RMHF	435_EPOS2 50/5
		414_ENC 30 HEDS 5540	435_EPOS2 70/10
		418_ENC 30 HEDL 5540	438_EPOS2 P 24/5
		412_ENC AEDL 5810	442_EPOS4 Module/Comp. 50/5
			443_EPOS4 Module/Comp. 50/8
			447_MAXPOS 50/5

Configuration

Bearing: Ball bearings preloaded
 Commutation: Graphite brushes
 Flange front/back: Standard flange/configurable flange/no flange
 Shaft front/back: Length/diameter/flat face
 Electric connection: Terminals or cable/alignment of connection/cable length/connector type

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com
sales@electromate.com

