

Visit nipponpulse.com to download 3D CAD drawings and 2D prints of this motor.

| | S605D | | S605T | | S605Q | | |
|--|---------------------------|--------------------------|-------------------------|--------------------------|---------------------------|---------------------------|--------------------------|
| Electrical Specs | S605D | S605D 1S | S605T | S605T 1S | S605Q | S605Q 2S | S605Q 1S |
| Continuous Force ¹ | 420N (94.4lbs) | 414N (93.1lbs) | 610N (137.1lbs) | 611 (137.3lbs) | 780N (175.4lbs) | 781N (175.6lbs) | |
| Continuous Current ¹ | 8.8Arms | 18Arms | 8.6Arms | 26Arms | 8.4Arms | 16.8Arms | 34Arms |
| Acceleration Force ² | 1700N (382.2lbs) | 1654 (371.82lbs) | 2400N (539.5lbs) | 2442 (548.9lbs) | 3100N (696.9lbs) | 3125 (702.5lbs) | |
| Acceleration Current ² | 35Arms | 70Arms | 34Arms | 103Arms | 34Arms | 67Arms | 134Arms |
| Force Constant (K _f) | 47N/arms (10.6lbs/amp) | 24N/Arms (5.4lbs/amp) | 71N/Arms (16lbs/amp) | 24N/Arms (5.4lbs/amp) | 93N/Arms (20.9lbs/amp) | 47N/Arms (10.6lbs/amp) | 23N/Arms (5.2lbs/amp) |
| Back EMF (K _e) | 16V/m/s (0.8V/in/s) | 7.8V/m/s (0.39V/in/s) | 24V/m/s (0.6V/in/s) | 7.9V/m/s (0.2V/in/s) | 31V/m/s (0.8V/in/s) | 16V/m/s (0.41V/in/s) | 7.8V/m/s (0.20V/in/s) |
| Resistance 25°C ³ | 1.1Ω | 0.28Ω | 1.7Ω | 0.19Ω | 2.2Ω | 0.55Ω | 0.14Ω |
| Inductance ³ | 6.5mH | 1.6mH | 10mH | 1.1mH | 13mH | 3.3mH | 0.81mH |
| Electric Time Constant | 5.91ms | | 5.88ms | | 5.91ms | | |
| Max. Rated Voltage (AC) | 240V | | | | | | |
| Fundamental Motor Constant (K _m) | 45.51N√W | 44.81N√W | 54.40N√W | 54.46N√W | 62.60N√W | 62.70N√W | |
| Magnetic Pitch (North-North) | 240mm (9.4in) | | | | | | |

Is this the proper Linear Shaft Motor for your application? Use our **SMART sizing program** to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


¹ Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

² Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


³ All winding parameters listed are measured line-to-line (phase-to-phase).

| Thermal Specs | S605D | S605T | S605Q |
|---|--------------------|--------------------|--------------------|
| Max Phase Temperature ⁴ | 135°C (275°F) | | |
| Thermal Resistance (Coil) (K _c) | 1.3°C/W (34.3°F/W) | 0.9°C/W (33.6°F/W) | 0.7°C/W (33.3°F/W) |

⁴ The standard temperature difference between the coil and the forcer surface is 40°C.

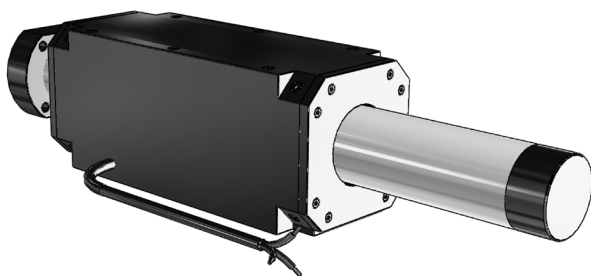

Bus Voltage

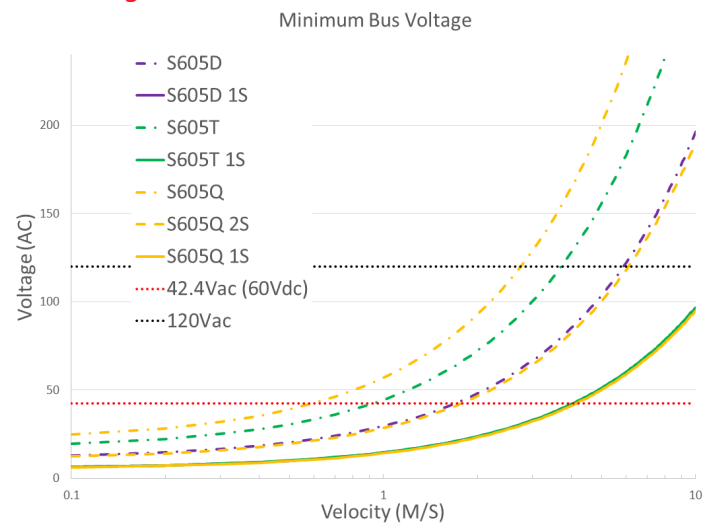

Part Numbering System

| | | | | | | |
|---|-------------------|---|--|------------------------------------|---|--|
| S | Shaft Size 605 | Forcer Size (A) <u>X</u> | Parallel Option <u>XX</u> | Usable Stroke (S) <u>XXXXst</u> | Options <u>XX</u> | Options <u>XX</u> |
| | | D: Double (2) windings T: Triple (3) windings Q: Quadruple (4) windings | Blank: Single Motor PL: Parallel Motors | 200-2000mm | Blank: Standard WP: Water Resistant HA: Digital Hall Effect | Blank: Standard FO: Forcer Only SO: Shaft Only |


| Forcer Specs | S605D | S605T | S605Q |
|------------------------|----------------------------|----------------|----------------|
| Forcer Length (A) | 310mm (12.2in) | 430mm (16.9in) | 550mm (21.7in) |
| Forcer Width | 125 x 120mm (4.9 x 4.72in) | | |
| Forcer Screw Pitch (P) | 105mm (4.13in) | 165mm (6.5in) | 225mm (8.9in) |
| Forcer Weight | 16kg (35.3lbs) | 21kg (46.3lbs) | 27kg (59.5lbs) |
| Gap | 1.75mm (0.07in) | | |

Tolerances are as follows:

| Dimension (mm) | Tolerance (mm) |
|----------------|----------------|
| 0 - 6 | ±0.1 |
| 7 - 30 | ±0.2 |
| 31 - 120 | ±0.3 |
| 121 - 315 | ±0.5 |
| 316 - 1000 | ±0.8 |
| 1001 - 2000 | ±1.2 |
| 2000 - | ±1.5 |

L = See Shaft Length
L1 = Usable Stroke + A
L2 = See Support Length
A = See Forcer Length
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

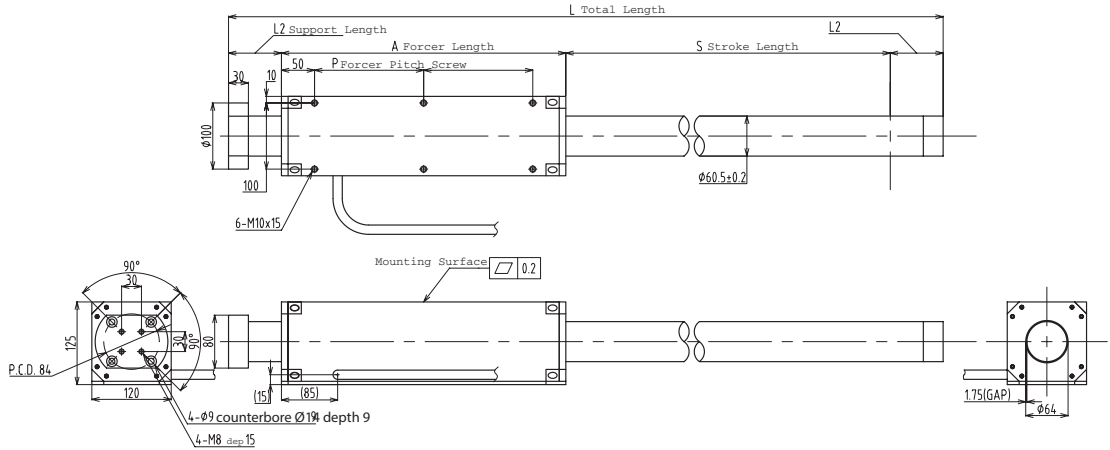

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 8.9 * 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

Hall Effect Specs

Technical drawing of the Hall Effect sensor assembly. The side view shows dimensions: Forcer Length (A), Forcer Screw Pitch (P), Forcer Screw Pitch (P), Forcer Screw Pitch (P), and Forcer Screw Pitch (P). Dimensions include 3.15, 80, 3.94, 100, 4.33, 110, 0.39, 10, 8.27, 210, 4.13, 105, 2.20, 56, and 4.33. The front view shows dimensions: 4.33, 110, 3.94, 100, 2.20, 56, 4.13, 105, 0.39, 10, and 4.13, 105.

Sensor Cable Specs

| | |
|-----------|--------------|
| Wire Type | UL 758 |
| Wire AWG | 28 |
| VCC | White/Red |
| GND | White/Black |
| Sensor 1 | Orange/Red |
| Sensor 2 | Orange/Black |
| Sensor 3 | Gray/Red |

The bending radius of the sensor cable should be R27.6mm (wire diameter 4.6 * 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high-flex cable as required by your application.

CE Type Motor Cable

| | | | |
|-----------|---------|--------------|--------------|
| Wire Type | UL 1330 | Ground Wire | CE |
| Wire AWG | 24 | Wire Type | UL 1330 |
| U Phase | Red | Wire AWG | 20 |
| V Phase | White | Frame Ground | Green/Yellow |
| W Phase | Black | | |

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer.

Forcer Spacing Distance

| Spec | S605T | S605Q |
|-------------------------|-------|-------|
| Forcer Spacing Distance | 50mm | |
| Pole (N/S) Distance | 120mm | |
| Forcer Length | 430mm | 550mm |
| Flip Forcers | No | Yes |

Tandem S605D forcers are possible, but are equivalent to one (1) S605Q forcer and thus are not listed above.

Tandem Forcer



Shaft Length (L)

| Stroke | S605D | S605T | S605Q |
|--------|--|------------------|------------------|
| 100 | Stroke is less than the electrical cycle length. | | |
| 150 | Contact Nippon Pulse. | | |
| 200 | 670mm (26.4in) | 790mm (31.1in) | 910mm (35.8in) |
| 250 | 720mm (28.3in) | 840mm (33.1in) | 960mm (37.8in) |
| 300 | 770mm (30.3in) | 890mm (35in) | 1010mm (39.8in) |
| 350 | 820mm (32.3in) | 940mm (37in) | 1060mm (41.7in) |
| 400 | 870mm (34.3in) | 990mm (39in) | 1110mm (43.7in) |
| 450 | 920mm (36.2in) | 1040mm (40.9in) | 1160mm (45.7in) |
| 500 | 970mm (38.2in) | 1090mm (42.9in) | 1210mm (47.6in) |
| 550 | 1020mm (40.2in) | 1140mm (44.9in) | 1260mm (49.6in) |
| 600 | 1070mm (42.1in) | 1190mm (46.9in) | 1310mm (51.6in) |
| 650 | 1120mm (44.1in) | 1240mm (48.8in) | 1360mm (53.5in) |
| 700 | 1170mm (46.1in) | 1290mm (50.8in) | 1410mm (55.5in) |
| 750 | 1220mm (48in) | 1340mm (52.8in) | 1460mm (57.5in) |
| 800 | 1310mm (51.6in) | 1430mm (56.3in) | 1550mm (61in) |
| 850 | 1360mm (53.5in) | 1480mm (58.3in) | 1600mm (63in) |
| 900 | 1410mm (55.5in) | 1530mm (60.2in) | 1650mm (65in) |
| 950 | 1460mm (57.5in) | 1580mm (62.2in) | 1700mm (66.9in) |
| 1000 | 1510mm (59.4in) | 1630mm (64.2in) | 1750mm (68.9in) |
| 1050 | 1560mm (61.4in) | 1680mm (66.1in) | 1800mm (70.9in) |
| 1100 | 1610mm (63.4in) | 1730mm (68.1in) | 1850mm (72.8in) |
| 1150 | 1650mm (65in) | 1780mm (70.1in) | 1900mm (74.8in) |
| 1200 | 1710mm (67.3in) | 1830mm (72in) | 1950mm (76.8in) |
| 1250 | 1750mm (68.9in) | 1880mm (74in) | 2000mm (78.7in) |
| 1300 | 1810mm (71.3in) | 1930mm (76in) | 2050mm (80.7in) |
| 1350 | 1860mm (73.2in) | 1980mm (78in) | 2100mm (82.7in) |
| 1400 | 1910mm (75.2in) | 2030mm (79.9in) | 2150mm (84.6in) |
| 1450 | 1960mm (77.2in) | 2080mm (81.9in) | 2200mm (86.6in) |
| 1500 | 2010mm (79.1in) | 2130mm (83.9in) | 2250mm (88.6in) |
| 1550 | 2100mm (82.7in) | 2180mm (85.8in) | 2300mm (90.6in) |
| 1600 | 2150mm (84.6in) | 2230mm (87.8in) | 2350mm (92.5in) |
| 1650 | 2200mm (86.6in) | 2280mm (89.8in) | 2400mm (94.5in) |
| 1700 | 2250mm (88.6in) | 2330mm (91.7in) | 2450mm (96.5in) |
| 1750 | 2300mm (90.6in) | 2380mm (93.7in) | 2500mm (98.4in) |
| 1800 | 2350mm (92.5in) | 2430mm (95.7in) | 2550mm (100.4in) |
| 1850 | 2400mm (94.5in) | 2480mm (97.6in) | 2600mm (102.4in) |
| 1900 | 2450mm (96.5in) | 2530mm (99.6in) | 2650mm (104.3in) |
| 1950 | 2500mm (98.4in) | 2580mm (101.6in) | 2700mm (106.3in) |
| 2000 | 2550mm (100.4in) | 2630mm (103.5in) | 2750mm (108.3in) |

Shaft Mass

| Stroke | S605D | S605T | S605Q |
|--------|--|------------------|------------------|
| 100 | Stroke is less than the electrical cycle length. | | |
| 150 | Contact Nippon Pulse. | | |
| 200 | 13.57kg (29.9lb) | 14.9kg (32.9lb) | 17.3kg (38.2lb) |
| 250 | 14.58kg (32.1lb) | 15.9kg (35.1lb) | 18.3kg (40.4lb) |
| 300 | 15.59kg (34.4lb) | 16.9kg (37.3lb) | 19.3kg (42.6lb) |
| 350 | 16.59kg (36.6lb) | 17.9kg (39.5lb) | 20.3kg (44.8lb) |
| 400 | 17.60kg (38.8lb) | 18.9kg (41.7lb) | 21.3kg (47.1lb) |
| 450 | 18.61kg (41lb) | 19.9kg (43.9lb) | 22.3kg (49.3lb) |
| 500 | 19.61kg (43.2lb) | 20.9kg (46.2lb) | 23.4kg (51.5lb) |
| 550 | 20.62kg (45.5lb) | 21.9kg (48.4lb) | 24.4kg (53.7lb) |
| 600 | 21.62kg (47.7lb) | 23kg (50.6lb) | 25.4kg (55.9lb) |
| 650 | 22.63kg (49.9lb) | 24kg (52.8lb) | 26.4kg (58.1lb) |
| 700 | 23.64kg (52.1lb) | 25kg (55lb) | 27.4kg (60.4lb) |
| 750 | 24.64kg (54.3lb) | 26kg (57.3lb) | 28.4kg (62.6lb) |
| 800 | 26.20kg (57.8lb) | 27kg (59.5lb) | 29.4kg (64.8lb) |
| 850 | 27.21kg (60lb) | 28kg (61.7lb) | 30.4kg (67lb) |
| 900 | 28.22kg (62.2lb) | 29kg (63.9lb) | 31.4kg (69.2lb) |
| 950 | 29.22kg (64.4lb) | 30kg (66.1lb) | 32.4kg (71.5lb) |
| 1000 | 30.23kg (66.6lb) | 31kg (68.3lb) | 33.4kg (73.7lb) |
| 1050 | 31.24kg (68.9lb) | 32kg (70.6lb) | 34.4kg (75.9lb) |
| 1100 | 32.24kg (71.1lb) | 33kg (72.8lb) | 35.4kg (78.1lb) |
| 1150 | 33.25kg (73.3lb) | 34kg (75lb) | 36.4kg (80.3lb) |
| 1200 | 34.25kg (75.5lb) | 35kg (77.2lb) | 37.4kg (82.5lb) |
| 1250 | 35.26kg (77.7lb) | 36kg (79.4lb) | 38.4kg (84.8lb) |
| 1300 | 36.27kg (80lb) | 37kg (81.7lb) | 39.5kg (87lb) |
| 1350 | 37.27kg (82.2lb) | 38kg (83.9lb) | 40.5kg (89.2lb) |
| 1400 | 38.28kg (84.4lb) | 39.1kg (86.1lb) | 41.5kg (91.4lb) |
| 1450 | 39.28kg (86.6lb) | 40.1kg (88.3lb) | 42.5kg (93.6lb) |
| 1500 | 40.29kg (88.8lb) | 41.1kg (90.5lb) | 43.5kg (95.9lb) |
| 1550 | 41.30kg (91.1lb) | 42.1kg (92.7lb) | 44.5kg (98.1lb) |
| 1600 | 42.30kg (93.3lb) | 43.1kg (95lb) | 45.5kg (100.3lb) |
| 1650 | 43.31kg (95.5lb) | 44.1kg (97.2lb) | 46.5kg (102.5lb) |
| 1700 | 44.32kg (97.7lb) | 45.1kg (99.4lb) | 47.5kg (104.7lb) |
| 1750 | 45.32kg (99.9lb) | 46.1kg (101.6lb) | 48.5kg (106.9lb) |
| 1800 | 46.33kg (102.1lb) | 47.1kg (103.8lb) | 49.5kg (109.2lb) |
| 1850 | 47.33kg (104.3lb) | 48.1kg (106.1lb) | 50.5kg (111.4lb) |
| 1900 | 48.34kg (106.6lb) | 49.1kg (108.3lb) | 51.5kg (113.6lb) |
| 1950 | 49.35kg (108.8lb) | 50.1kg (110.5lb) | 52.5kg (115.8lb) |
| 2000 | 50.35kg (111lb) | 51.1kg (112.7lb) | 53.5kg (118lb) |

Additional stroke lengths are available (up to 3000mm). Contact Nippon Pulse for more information.

Lead Wire

| | |
|-----------|-----------|
| Wire Type | UL 2570FA |
| Wire AWG | 14 |
| U Phase | Red |
| V Phase | White |
| W Phase | Black |

300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

Connector (Motor Cable)

| | |
|--------------------|--------------|
| Receptacle Housing | VLR-03V |
| Plug Housing | VLP-03V |
| Retainer | VLS-03V |
| Pin Contact | SVM-61T-P2.0 |
| Socket Contact | SVF-61T-P2.0 |

To be installed by the user.


Support and Bending

| Stroke | Support Length (L2) | Max. Bending |
|----------|---------------------|--------------|
| 0~550 | 80mm | 0.00mm |
| 551~750 | 80mm | 0.15mm |
| 751~1500 | 100mm | 0.60mm |
| 1501~max | 120mm | 1.10mm |

Shaft Diameter (D) - 60.5mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+(Support Length (L2)x2)

THM Option

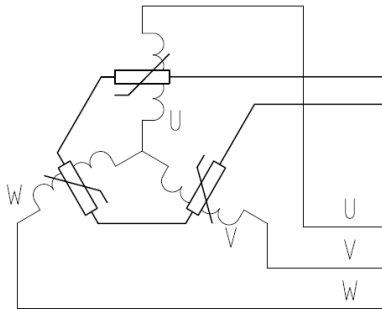

Circuit Diagram

4. Thermistor
PTCSL20T071DBE(Vishay)

Thermocouple

Thermal sensor

Thermocouple K type (marked each phase name)

Attached to the surface of inside of coil

Length 3000mm

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse
to speak with an applications engineer. 1-540-633-1677

www.nipponpulse.com

Serviced By:
ELECTROMATE
Toll Free Phone (877) SERV098
Toll Free Fax (877) SERV099
www.electromate.com
sales@electromate.com