



# POSITAL

## FRABA

### IXARC Absolute Rotary Encoder

OCD-D2C1B-0013-S060-H3P



#### Interface

|                       |  |
|-----------------------|--|
| Interface             | DeviceNet  |
| Profile               | CIP (Common Industrial Protocol)   |
| Manual Functions      | Address selector switch 0-99 and terminal resistor (with connection cap)               |
| Transmission Rate     | 150 kBaud, 250 kBaud, 500 kBaud  |
| Interface Cycle Time  | $\geq 10$ ms   |
| Programming Functions | Resolution, preset, complement, transmission mode: polled mode, cyclic mode, sync mode |

#### Outputs

|               |   |
|---------------|---|
| Output Driver | Transceiver (ISO 11898), Galvanically Isolated by Opto-Couplers |
|---------------|---|

#### Electrical Data

|                             |  |
|-----------------------------|--|
| Supply Voltage              | 10 - 30 VDC                                      |
| Current Consumption         | $\leq 230$ mA @ 10 V DC, $\leq 100$ mA @ 24 V DC |
| Power Consumption           | $\leq 2.5$ W                                     |
| Start-Up Time               | $< 1$ s  |
| Reverse Polarity Protection | Yes  |
| Short Circuit Protection    | Yes  |
| EMC: Emitted Interference   | DIN EN 61000-6-4                                 |
| EMC: Noise Immunity         | DIN EN 61000-6-2                                 |

Data Sheet

Printed at 1-10-2020 20:10



# POSITAL

## FRABA

|      |                    |
|------|--------------------|
| MTTF | 13.5 years @ 40 °C |
|------|--------------------|

### Sensor

|                       |   |
|-----------------------|---|
| Technology            | Optical   |
| Resolution Singleturn | 13 bit  |
| Accuracy (INL)        | $\pm 0.0220^\circ$ (14 - 16 bit), $\pm 0.0439^\circ$ ( $\leq 13$ bit) |
| Code                  | Binary  |

### Environmental Specifications

|                            |                                    |
|----------------------------|------------------------------------|
| Protection Class (Shaft)   | IP65                               |
| Protection Class (Housing) | IP65                               |
| Operating Temperature      | -40 °C (-40 °F) - +85 °C (+185 °F) |
| Storage Temperature        | -40 °C (-40 °F) - +85 °C (+185 °F) |
| Humidity                   | 98% RH, no condensation            |

### Mechanical Data

|  |  |
|--|--|
| Connection Cap Material  | Aluminum   |
| Housing Material   | Steel  |
| Housing Coating  | Cathodic corrosion protection (>720 hrs salt spray resistance)             |
| Flange Type  | Synchro, $\varnothing$ 58 mm (S)   |
| Flange Material  | Aluminum   |
| Shaft Type   | Solid, Length = 10 mm  |
| Shaft Diameter   | $\varnothing$ 6 mm (0.24")   |
| Shaft Material   | Stainless Steel V2A (1.4305, 303)  |
| Max. Shaft Load  | Axial 40 N, Radial 110 N   |
| Minimum Mechanical Lifetime (10 <sup>8</sup> revolutions with Fa/Fr) | 550 (20 N / 40 N), 195 (40 N / 60 N), 135 (40 N / 80 N), 85 (40 N / 110 N) |
| Rotor Inertia  | $\leq 30 \text{ gcm}^2$ [ $\leq 0.17 \text{ oz-in}^2$ ]                    |
| Friction Torque  | $\leq 3 \text{ Ncm}$ @ 20 °C (4.2 oz-in @ 68 °F)                           |
| Max. Permissible Mechanical Speed                                    | $\leq 12000 \text{ 1/min}$   |
| Shock Resistance   | $\leq 100 \text{ g}$ (half sine 6 ms, EN 60068-2-27)                       |
| Permanent Shock Resistance   | $\leq 10 \text{ g}$ (half sine 16 ms, EN 60068-2-29)                       |
| Vibration Resistance   | $\leq 10 \text{ g}$ (10 Hz - 1000 Hz, EN 60068-2-6)                        |
| Length   | 73,5 mm (2.89")  |
| Weight   | 450 g (0.99 lb)  |



# POSITAL


## FRABA

### Electrical Connection

|                        |                 |
|------------------------|-----------------|
| Connection Orientation | Radial          |
| Connection Type        | 3 x Cable Gland |

### Product Life Cycle

|                    |             |
|--------------------|-------------|
| Product Life Cycle | Established |
| Approval           | CE          |

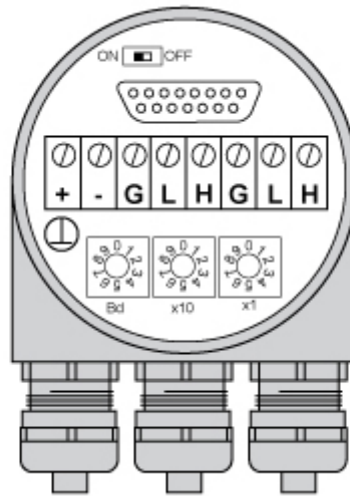

### Connection Plan

| SIGNAL       | PIN NUMBER |
|--------------|------------|
| Power Supply | +          |
| GND          | -          |
| CAN High     | H          |
| CAN Low      | L          |
| CAN GND      | G          |
| CAN High     | H          |
| CAN Low      | L          |
| CAN GND      | G          |
| GND          | ⊥          |

Connector-View on Encoder

### Dimensional Drawing

[2D Drawing](#)



# POSITAL

---

## FRABA

### Accessories

#### Couplings

Coupling Bellow Type-06-06

Coupling Bellow Type-06-10

Coupling Bellow Type-06-08

Coupling Bellow Type-06-(3/8")

Coupling Bellow Type-06-(1/4")

Coupling Jaw Type-06-06

Coupling Jaw Type-06-10

Coupling Jaw Type-06-08

Coupling Jaw Type-06-12

Coupling Jaw Type-06-(1/4")

Coupling Jaw Type-06-(3/8")

Coupling Disc Type-06-06

Coupling Disc Type-06-10

More

Adapter Flanges

Mounting Bracket for Synchro Flange w/ fixtures

Clamping Rings

Clamp Disc w/ Eccentric Hole-4pcs

Clamp Disc w/ Centred Hole-4pcs

### Contact

## Sold & Serviced By:

 Canadian and International Sales  
**ELECTROMATE**  
877-737-8698  
[sales@electromate.com](mailto:sales@electromate.com)  
[www.electromate.com](http://www.electromate.com)

U.S. Sales  
  
877-378-0240  
[sales@servo2go.com](mailto:sales@servo2go.com)  
[www.servo2go.com](http://www.servo2go.com)

The picture and drawing are for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.