

UniOP eTOP308

The UniOP eTOP Series 300 combines state-of-the-art features and performance with an outstanding design. They are the ideal choice for HMI applications including factory and building automation. The eTOP308 features an industry-standard 7.5" TFT display with full vector graphic capabilities. This is the ideal product for high-end HMI applications. Connections include Ethernet and USB.



- 7.5" TFT color display, CCFL backlight
- 640x480 pixel (VGA) resolution, 64K colors
- Advanced vector graphics
- Resistive touchscreen
- 64 MB user memory
- 10/100 Ethernet interface
- USB interface
- Connection to bus systems using optional plug-in modules
- Slim design. Mounting depth less than 50mm

Highlights


The eTOP Series 300 HMI panels are fully compatible with UniOP Designer 6 software.

- Powerful and intuitive programming with the UniOP Designer 6 software.
- Supports more than 150 communication drivers.
- Built-in Ethernet port for communication with devices, programming the HMI from Designer and retrieving data from computers.
- USB host port for the connection of flash drives. Flash drives can be used for upgrading applications and firmware.
- Optional plug-in modules for fieldbus systems and networks. Compatible with TCM and SCM modules.
- Dual-driver communication capability.
- Vector graphic capabilities including the support of multiple layers and object transparency.
- Data display in numerical, text, bargraph, analog gauges and graphic image formats. Dynamic object properties supported.
- Data acquisition and trend presentation. Trend data can be transferred to a host computer using the Ethernet connection.
- Recipe data storage. Recipe data can be transferred to a host computer using the Ethernet connection or copied to flash drives via USB connection.
- Multilanguage applications. Far East languages are supported. The number of runtime languages is limited only by the available memory. All text information in the application can be exported to files in Unicode format for easier translation.
- Powerful macro editor to configure touchscreen operation
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to a host computer.
- Eight level password protection.
- Report printing to serial printer. Reports are freely configurable using Designer.
- Ethernet-based UniNet network to share data between UniOP HMIs and to serve data using UniNet OPC Server.


Technical Data

Display		Hardware Real Time Clock	Yes, with battery back-up
Type	TFT	Clock	
Resolution	640x480, VGA	Screen saver	Yes
Active display area	7.5" diagonal	Buzzer	Yes, audible feedback for touchscreen
Colors	64K		
Backlight	CCFL		
Brightness	250 Cd/m ² typ.	Ratings	
Dimming	Yes	Power supply voltage	24 Vdc (18 to 30 Vdc)
		Current consumption	0.8 A at 24 Vdc(max.)
		Fuse	Automatic
		Weight	Approx 1.2 Kg
		Battery	Rechargeable Lithium battery, not user-replaceable
Memory			
User memory	64 MB internal Flash	Environmental Conditions	
		Operating temperature	0 to 50 °C
		Storage temperature	-20 to +70 °C
		Operating and storage humidity	5 – 85 % relative humidity, non-condensing
		Protection class	IP65 (front panel) IP20 (rear)
Front panel			
Touchscreen	Analog resistive	Dimensions	
User LED indicators	1	Faceplate LxH	232x187 mm
System LED indicators	4	Cutout AxB	221x176 mm
		Depth D+T	42mm+4mm
Interfaces			
Ethernet port	10/100 Mbit	Approvals	
USB port	Host interface, version 1.1	CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
PC/Printer port	RS-232, RS-485, RS-422, software configurable	UL	UL508 Listed Haz. Loc. Class I, Division 2, Groups A,B,C and D.
PLC port	RS-232, RS-485, RS-422, software configurable		
Aux port	Yes, fieldbus and controller modules		
Functionality			
Vector graphics	Yes		
Object dynamics (hide/show)	Yes		
TrueType fonts	Yes		
Dual driver capability	Yes		
Video input	No		
Data acquisition and trends	Yes		
Multilanguage	Yes, number of run-time languages limited only by available memory		
Recipe memory	Yes. Flash memory storage limited only by available memory		
UniNet network	Client/Server		
Alarms	1024		
Event list	1024		
Password	Yes		

Dimensions

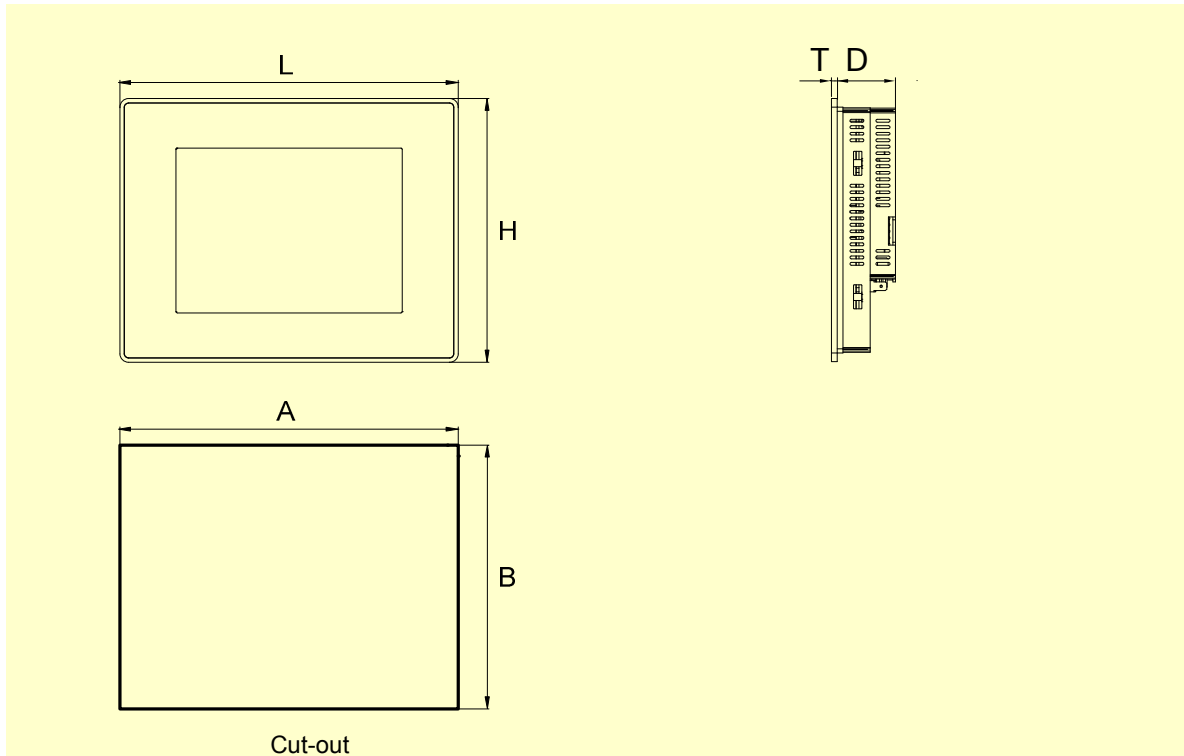

Connections

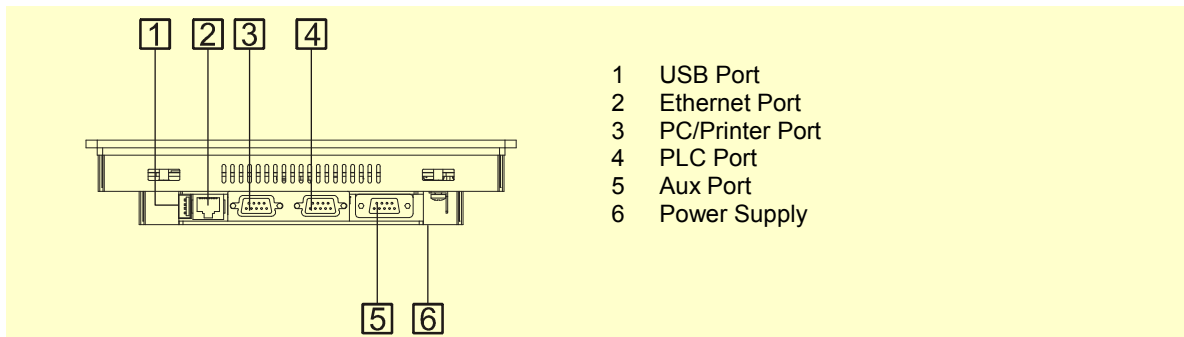

Ordering Information

Model	Part Number	Description
eTOP308	ETOP308U101	7.5" TFT color touchscreen with Ethernet and USB interfaces. White front panel.
	ETOP308U201	7.5" TFT color touchscreen with Ethernet and USB interfaces. Silver front panel.
	ETOP308U301	7.5" TFT color touchscreen with Ethernet and USB interfaces. Black front panel.
PROT-13		Disposable protection foil for 7.5" eTOP touch panels (10 pieces).
PROT-19		Disposable protection foil for 7.5" eTOP touch panels (10 pieces). UV resistant.

ptn0315**Ver. 1.5****Copyright © 2010-2014 Exor International S.p.A. – Verona, Italy**

Subject to change without notice.

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.uniop.com

ptn0315-5.doc - 17.02.2014

UniOP eTOP308