

RCL-RA2L

ROBO Cylinder Rod Type Mini-Slim Type ø20mm Diameter Linear Servo Motor


■ Configuration: **RCL** — **RA2L** — **I** — **5** — **N** — **30** — — —

Series — Type — Encoder — Motor — Lead — Stroke — Compatible Controllers — Cable Length — Option

I: Incremental 5: 5W linear servo motor N: No screw 30: 30mm

A1: ACON N: None B: Brake (with brake box)
 RACON P: 1m BN: Brake (without brake box)
 ASEL S: 3m
 A3: AMEC M: 5m
 ASEP X : Custom

* See page Pre-35 for an explanation of the naming convention.

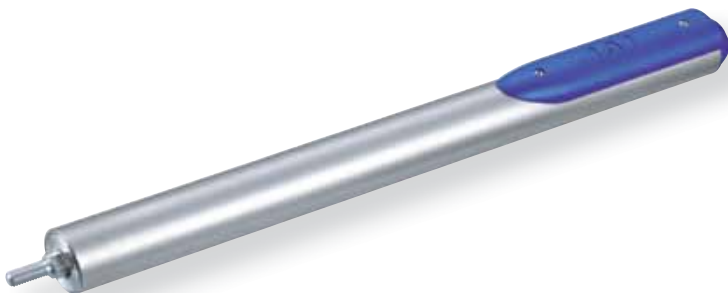

Technical References P. A-5

POINT Notes on Selection

- The load capacity is determined by the acceleration and the duty. Check the load capacity on the Load Capacity (Horizontal) vs. Acceleration graph on the right.
 The duty is $\frac{\text{Operating time}}{\text{Operating time} + \text{stationary time}} \times 100$ per cycle.
- If you will be operating the actuator vertically, please use the optional brake.
- Please use an external guide to avoid horizontal or rotational load on the rod.
- The pushing force will fluctuate significantly at low electrical limits.
- Please note that an absolute unit cannot be used.

Load Capacity (Horizontal) vs. Acceleration

Max. Acceleration (G)	Load Capacity (kg)			
	Continuous Operation (100% duty)		(70% or less duty)	
	Horizontal	Vertical	Horizontal	Vertical
0.1	1	0.2	1	0.2
0.3				
0.5	0.85	0.2	0.5	0.2
1	0.4			
1.5	0.24	-	0.3	-
2	0.15	-	0.2	-

Pushing Force Guideline

The pushing motion is possible within the values below. (N)

Electrical Limit	30%	40%	50%	60%	70%	80%
Pushing Force	1.5	2	2.5	3	3.5	4

(Note) The above pushing force is applicable to horizontal usage. For vertical upward motions, subtract 1N from the above value, and for downward motions, add 1N.

Actuator Specifications

Lead and Load Capacity

Model	Motor Output (W)	Max. Load Capacity		Rated Thrust (N)	Max. Momentary Thrust (N)	Max. Acceleration (G)	Positioning Repeatability (mm)	Stroke (mm)
		Horizontal (kg)	Vertical (kg)					
RCL-RA2L-I-5-N-30-①-②-③	5	See table above	See table above	5	18	Horizontal 2G Vertical 1G	±0.1	30 (Fixed)

Legend ① Compatible controller ② Cable length ③ Options

Stroke and Maximum Speed

Stroke / Lead	30 (mm)
	(No lead screw)

(Unit: mm/s)

Stroke List

Stroke (mm)	Standard Price
30	-

② Cable List

Type	Cable Symbol	Standard Price	
		No Brake	With Break
Standard Type (Robot Cables)	P (1m)	-	-
	S (3m)	-	-
	M (5m)	-	-
Special Lengths	X06 (6m) ~ X10 (10m)	-	-
	X11 (11m) ~ X15 (15m)	-	-
	X16 (16m) ~ X20 (20m)	-	-
		-	-

* The RCL comes standard with a robot cable.
 * See page A-39 for cables for the brake-less model.
 * See page 394 for cables for the brake-equipped model.

③ Option Price List

Name	Option Code	See Page	Standard Price
Brake (with brake box)	B	→ P394	-
Brake (without brake box)	BN	→ P394	-

* To use the brake, a brake box and a dedicated cable for the brake-equipped model are required.
 If you just need the brake-equipped actuator itself for maintenance, please specify option "BN" (no brake box).

Actuator Specifications

Item	Description
Drive System	Linear servo motor
Encoder Resolution	0.042mm
Base	Material: Carbon steel tube (nickel-plated)
Ambient Operating Temp./Humidity	0~40°C, 85% RH or less (non-condensing)
Service Life	10 million round trip cycles




393

RCL-RA2L

- Slider Type
- Mini
- Standard
- Controllers Integrated
- Rod Type
- Mini
- Standard
- Controllers Integrated
- Table/Arm /Flat Type
- Mini
- Standard
- Gripper/ Rotary Type
- Linear Servo Type
- Cleanroom Proof
- Splash Proof
- Controllers
- PMEC /AMEC
- PSEP /ASEP
- ROBO NET
- ERC2
- PCON
- ACON
- SCON
- PSEL
- ASEL
- SSEL
- XSEL
- Pulse Motor
- Servo Motor (24V)
- Servo Motor (200V)
- Linear Servo Motor

Dimensions

For Special Orders P. A-9

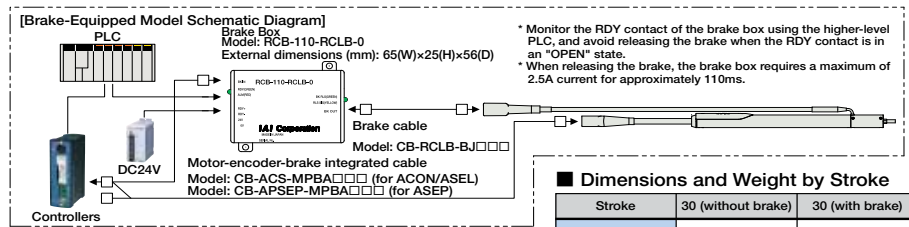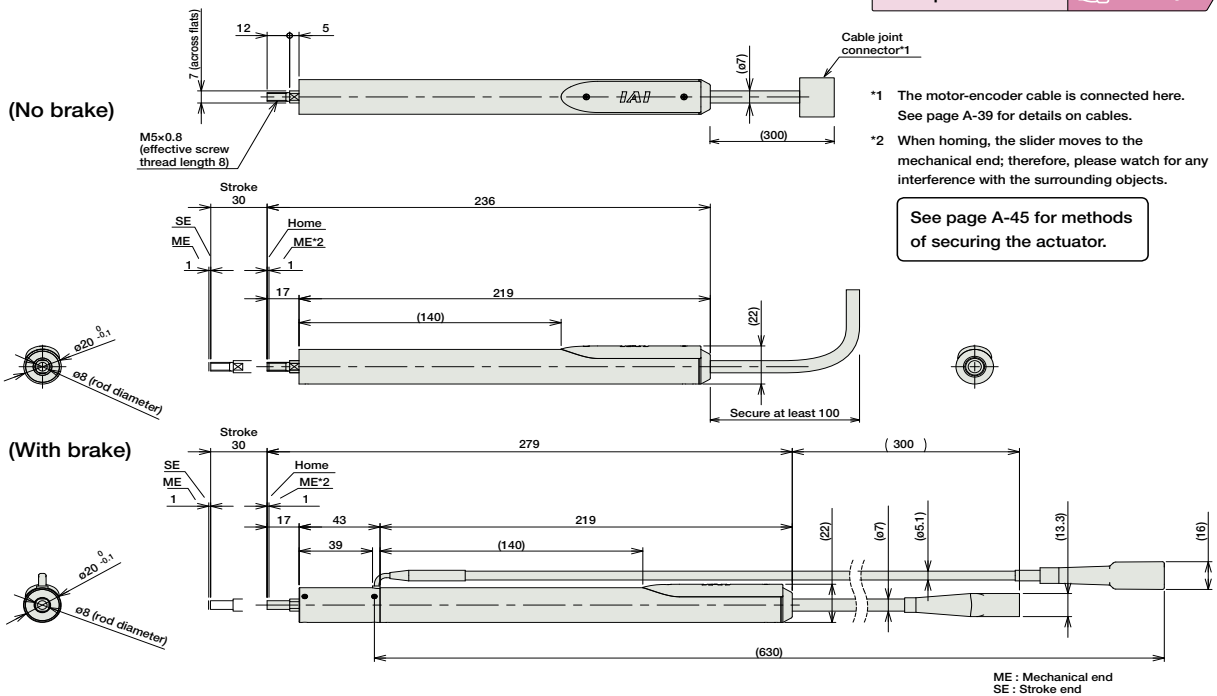

Dimensions and Weight by Stroke

Stroke	30 (without brake)	30 (with brake)
Weight (kg)	0.33	0.4

① Compatible Controllers

The RCL series actuators can operate with the controllers below. Select the controller according to your usage.

Name	External View	Model	Description	Max. Positioning Points	Input Voltage	Power Supply Capacity	Standard Price	See Page
Solenoid Valve Type		AMEC-C-SI-NP-2-1	Easy-to-use controller, even for beginners	3 points	AC100V	2.4A rated	-	→ P477
		ASEP-C-SI-NP-2-0	Operable with same signal as solenoid valve. Supports both single and double solenoid types. No homing necessary with simple absolute type.				-	→ P487
Splash-Proof Solenoid Valve Type		ASEP-CW-SI-NP-2-0					-	
Positioner Type		ACON-C-SI-NP-2-0	Positioning is possible for up to 512 points	512 points	DC24V	6.4A max.	-	→ P535
Safety-Compliant Positioner Type		ACON-CG-SI-NP-2-0					-	
Pulse Train Input Type (Differential Line Driver)		ACON-PL-SI-NP-2-0	Pulse train input type with differential line driver support	(-)	DC24V	6.4A max.	-	→ P535
Pulse Train Input Type (Open Collector)		ACON-PO-SI-NP-2-0	Pulse train input type with open collector support				-	
Serial Communication Type		ACON-SE-SI-N-0-0	Dedicated to serial communication	64 points			-	
Field Network Type		RACON-5	Dedicated to field network	768 points			-	→ P503
Program Control Type		ASEL-C-1-SI-NP-2-0	Programmed operation is possible. Operation is possible on up to 2 axes	1500 points			-	→ P567

* This is for the single-axis ASEL.

- Slider Type
- Mini
- Standard
- Controllers Integrated
- Rod Type
- Mini
- Standard
- Controllers Integrated
- Table/Arm /Flat Type
- Mini
- Standard
- Gripper/ Rotary Type
- Linear Servo Type
- Cleanroom Proof
- Splash Proof
- Controllers
- PMEC /AMEC
- PSEP /ASEP
- ROBO NET
- ERC2
- PCON
- ACON
- SCON
- PSEL
- ASEL
- SSEL
- XSEL
- Pulse Motor
- Servo Motor (24V)
- Servo Motor (200V)
- Linear Servo Motor