

Sold & Serviced By:

 **ELECTROMATE**

Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com

KEB



COMBIVERT G6

HIGH PERFORMANCE INVERTER 0.75 ... 30 kW

EN



CONTENTS

PAGE

System overview	3
High performance inverter	4
Integrated flexibility with safety	5
Properties / Functions - Control unit	6
Properties / Functions - Power stage	7
Data table - mechanics	8
Data table - electrical	9
Applications - machine building and plant constructions	10
COMBIVIS 6 - the tool for all tasks	12
Decentralized high protection degree	13
COMBILINE - accessories	14
KEB partner	15

SYSTEM OVERVIEW

Automation with Drive

stands as a synonym for optimally selected combinations of control and automation solutions with the drive level at the end it is the key to successful machine concepts.

Let the following pages inspire you with regards to the diversity and performance of the COMBIVERT G6 drive controller, and help you to find a solution that reliably meets your requirements.


SOFTWARE




HMI




CONTROL

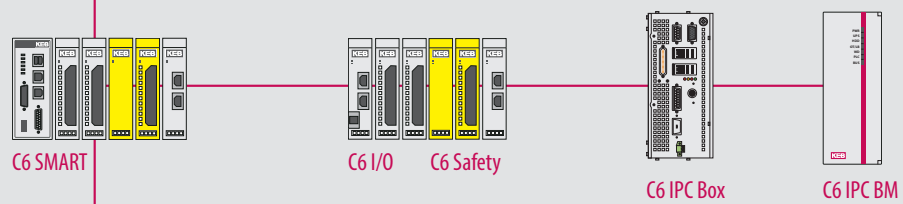

DRIVES

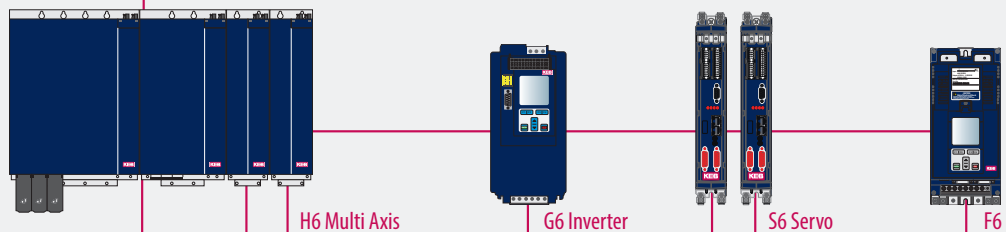

MOTORS

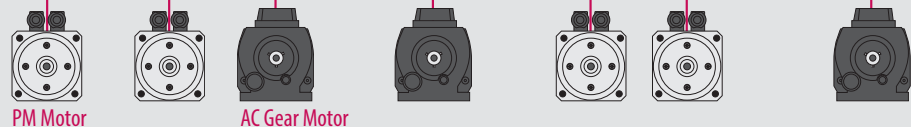

COMBIVERT G6 - HIGH PERFORMANCE INVERTER



The COMBIVERT G6 series was designed as an solution which covers all important requirements for open loop three-phase drives within one device. Therefore a high degree of variability, supporting actual and future technologies, is prepared.

Equipped with new 32-bit microcontrollers, proven features of previous KEB frequency inverters have been specifically enhanced and further developed in the devices.

- The basic version of the operating v/Hz - and the **SMM**-control method (**S**ensorless **M**otor **M**anagement) uses conventional tasks with asynchronous drives for output frequencies up to 599 Hz, optional up to 800 Hz.

Highest demands on torque and speed stability meet the versions with sensorless control operation

- **G6-ASCL** (asynchronous-sensorless control) for asynchronous motors and
- **G6-SCL** (synchronous-sensorless control) synchronous motors

The two level parameter structure with basic (customer parameters) and application menu (application parameters) gives COMBIVERT G6 a unique user friendly and easy handling high functionality. The integrated multi-language LCD plain text display eased the operator guidance.


Demand-driven fan and stand-by mode reduce equipment losses / heat stress in the switching cabinet, ultimately increasing the overall efficiency of the system.

For a simplified maintenance, the fans are easily replaceable. The compact design for "side by side" reduces the space required for multi-axis to a minimum.

COMBIVERT G6 - the new reference point for industrial applications in machine and plant construction.


Conforming to the actual requirements of the European machine directive, the COMBIVERT G6 offers an integrated 2-channel safety function STO according to category 3, EN ISO 13849-1 PL e / IEC EN 62061, SIL 3.

STO

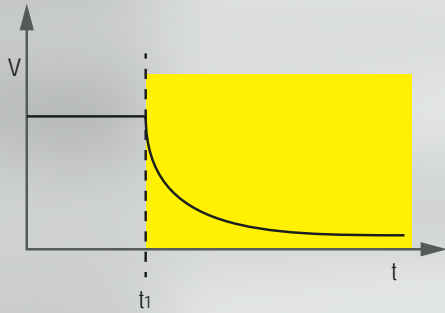


Safe Torque OFF

SS1

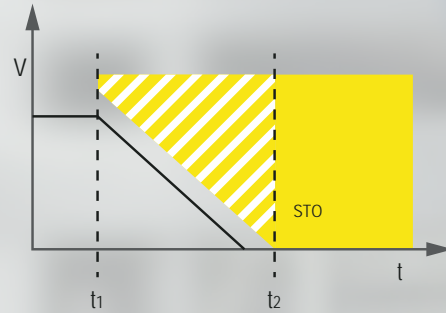

Safe Stop 1

SSM

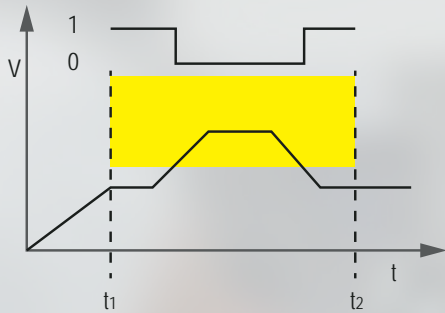

Safe Speed Monitor (f = 0 Hz)

Additionally the function SS1 can be covered together with an external safety timing relay. The drive is decelerated within a fixed time and is set to STO (stop category 1, EN 60204-1).

COMBIVERT G6 - ON BOARD - EMC TECHNOLOGY

All sizes are equipped with an internal EMC filter ready for the installation, whose special property are the minimum leakage current (< 5 mA) against earth and motor cable lengths up to 100 m.

COMBIVERT G6 - FOR SERIAL COMMUNICATION

Flexible connection to the control level meets COMBIVERT G6 with ON-BOARD-fieldbus-options for



CAN over EtherCAT DS 402
100 MBaud
(without LCD-Display)



CAN-Slave
ProfI DS 402
(with / without LCD-Display)

optional solutions



PROPERTIES / FUNCTIONS - CONTROL UNIT

DIGITAL INPUTS AND OUTPUTS

- 8 Digital In
- 2 Relays
- 2 Digital Out
- Pulse-Train (CAN)

UNIVERSAL ANALOG INPUT / OUTPUTS

- 2 Analog In, 0 ... ± 10 V, 0 ... ± 20 mA, 4 ... 20 mA
- 2 Analog Out (0 ... ± 10 V) (not available for EtherCAT and VARAN)

SAFETY FUNCTION

- STO -function, 2-channel according category 3, EN ISO 13849-1 PL e, IEC EN 62061, SIL3
- Devices with EtherCAT - and IO-Link control fulfill optional, the TÜV-certified function SSM with level 0 Hz

CONTROL UNIT

- internal and external 24 V DC supply
- RS 232/485-interface, open protocol KEB DIN 66019-II

DC-BRAKING

- Special stopping without brake resistor

BRAKE CONTROL

- Safe operation of brake and sliding-rotor motors

PID-CONTROLLERS

- Process controllers for internal and external variables

OEM - USER GUIDE


- For direct use in series equipment, **KEB** offers the option of delivering devices ex works, which are fully preset and protected against unauthorised access with a password

QUICK INPUT / OUTPUT SCANNING

- For the 32-pole control terminal strip for dynamic start-stop applications with high and repetitious accuracy


8 PARAMETER SETS

- Complete set programming offers extensive functionality for I/O handling tasks or sequential operation of multiple motors, and can also partially take over otherwise superordinated PLC tasks

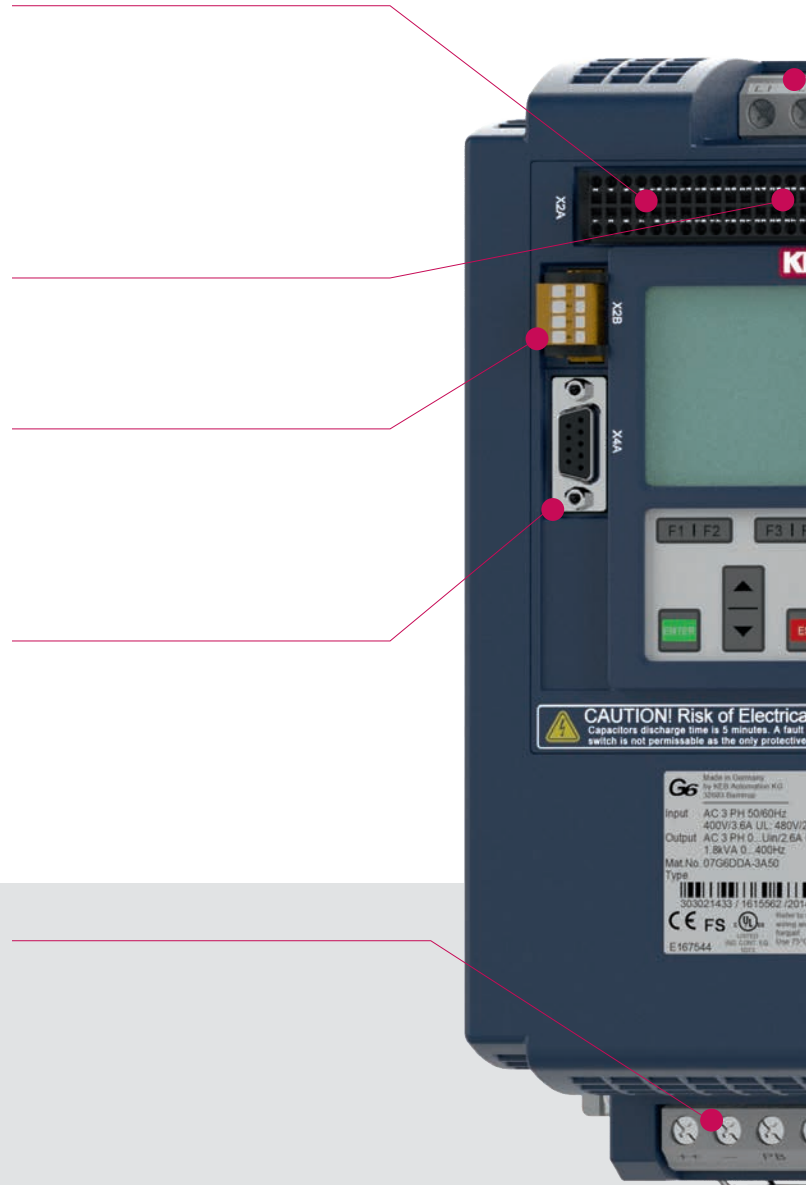

EtherCAT

CANopen

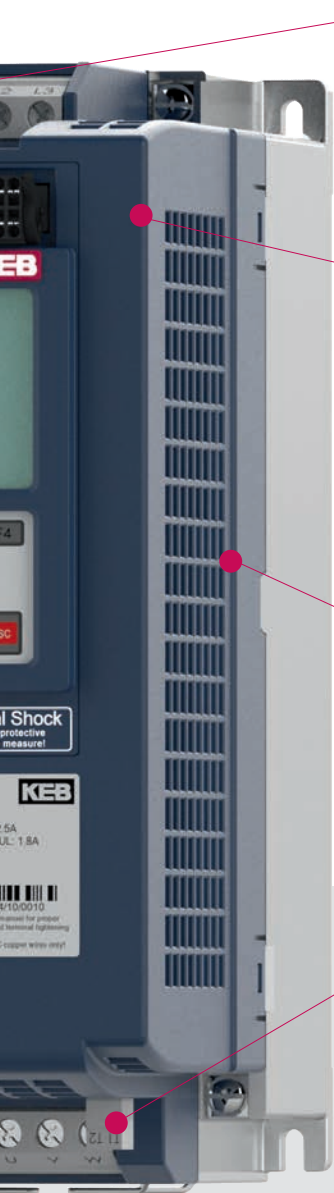

COMBIVERT G6
Safety-version with display

POWER STAGE

- 1 ph. 200 ... 240 V AC, 3-ph.
- 380 ... 480 V AC, +10/-20%, 50/60 Hz and DC-input
- EMC according to class C1 and C2 with integrated filter
- Internal braking transistor (GTR7)

INTEGRATED EMC SOLUTION

built with new innovative core materials and configured

- according to EN61800-3 for environments C1 and C2 sized for motor cables, up to 100 m - C2 / 50 m - C1
- for especially low leakage currents of the filter component towards the ground < 5 mA (low leakage EMC)

and installation-safe due to consistently separated mains and motor connection side.

FULLY DIMENSIONED

- With high overload characteristic for acceleration and deceleration, primarily configured for load profiles with constant torque.
- True intermediate circuit capacity for absorbing pulse energy and robust behaviour against fluctuations of net.

THERMO CONTACT EVALUATION


- Flexibly adjustable analysis of thermal signals of connected motors (PTC and thermo switches) for advanced warning or direct safety shut-down.



PREPARED FOR WORLDWIDE USE

- Approbation UL/cUL
- Configured for mains input voltages from 200 V to 240 V, or 380 V to max. 480 V, 50/60 Hz, tolerance +10/-20%
- DC-supply with precharging in series (housing A ... C)
- Protective coating of the circuit boards

DATA TABLE - MECHANICS

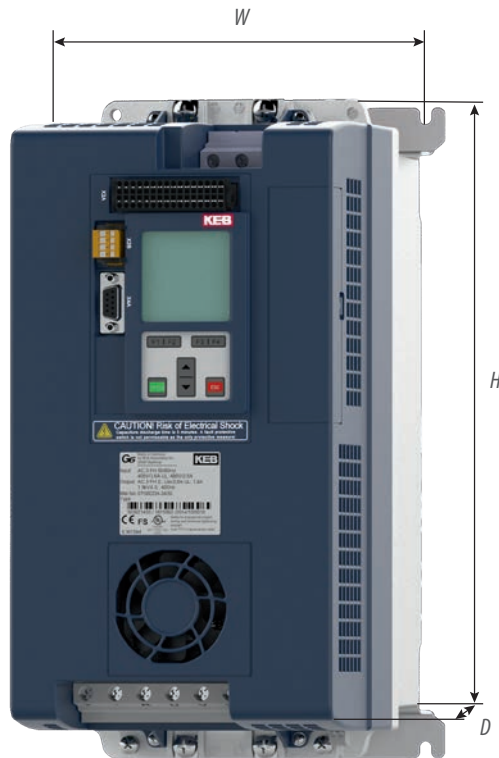

COMBIVERT G6
housing E - Flat Rear

Available in 4 different mechanical sizes, COMBIVERT G6 are covering the power range from 0.75 kW to 30 kW designed for cabinet or machine frame installation.

Devices with Flat Rear and the push-through mounting are size depending variations to optimize the heat transfer.

INSTALLATION SIZE			A	B	C	E
Width	B	[mm]	90	90	117	170/198*
Height	H	[mm]	204	269	260	340
Depth	T	[mm]	200	200	230/175*	280/165*
Mounting			2 x M4	2 x M4	4 x M5	4 x M6 / 10 x M6*
Weight		[kg]	1.5	2.5	4.6/4.5*	11.3
Cooling						
Ventilated convection			✓	✓	✓	✓
Flat Rear* heat transfer			✓	✓	option	option
External heat/push-through			—	—	—	✓

	230 V		400 V											
	07	09	07	09	10	12	13	13	14	15	16	17	18	19
Size														
Input rating U_N [V]	230 V		400 / 480 V*											
Mains phases	1		3											
Mains frequency [Hz]	50/60 ±2 %		50/60 ±2 %											
Housing size	A		A			B			C			E		
Output power rating [kVA]	1.6	2.8	1.8	2.8	4	6.6	8.3	8.3	11	17	23	29	35	42
Max. motor power rating [kW]	0.75	1.5	0.75	1.5	2.2	4	5.5	5.5	7.5	11	15	18.5	22	30
Output rated current * [A]	4	7	2.6	4.1	5.8	9.5	12	12	16.5	24	33	42	50	60
Max. short-time limit current (60 sec.) [A]	7.2	12.6	4.7	7.2	10.4	17.1	21.6	21.6	29.7	36	49.5	63	75	90
OC-release current [A]	8.6	15.1	5.6	8.9	12.5	20.6	25.9	25.9	35.6	43.2	59	75	90	108
Input rated current [A]	8	14	3.6	6	8	13	17	17	23	31	43	55	65	66
Max. admissible mains fuse (gG) [A]	20	20	16	16	16	20	25	25	25	35	50	63	80	80
Rated switching frequency [kHz]	4	4	8	4	4	4	4	8	4	4	4	4	4	4
Max. switching frequency [kHz]	8	8	8	8	8	8	8	8	8	8	8	8	8	8
Power loss at nominal operation approx. [W]	90	100	40	50	65	92	124	210	220	285	448	569	687	762
Input voltage range U_{in} [V]	180 ... 264 ±0%		380 ... 480 (305 ... 528 ± 0%)											
Network configurations	TN, TT		TN, TT, IT											
Output voltage [V]	3 x 0 ... U_{in}													
Output frequency [Hz]	0 ... 400 (fs = 4 kHz) / 0 ... 599 (fs = 8 kHz) optional 800													
Max. Motor cable length (screened EN 61800-3)														
Limit class C1 (low-capacity/standard line) [m]	30		50 / 25											
Limit class C2 (low-capacity/standard line) [m]	50		100 / 50											
Leakage current [mA]	< 5													
Protection type [EN60529]	IP 20 / VBG4													
Operating temperature [°C]	-10 ... 45 (55 with derating)													
Storage temperature [°C]	-25 ... 70													
Climate category in operation [EN 60721-3-3]	3K3													
Environment [IEC 664-1]	rate of pollution 2													
Vibration	railway EN 50155, German. Lloyd Part 7-3													
Internal braking transistor GTR7	✓													
Intermediate circuit connection	✓													
Motor PTC-evaluation	✓													

* Rated Voltage 480 V: $I_{nom} = 0.86 \times$ output rated current

Sold & Serviced By:



Toll Free Phone (877) SERV098
www.electromate.com
sales@electromate.com



APPLICATIONS MASCHINE BUILDING AND PLANT CONSTRUCTIONS

FOOD PRODUCTION

- High breakaway torque during start-up
- Exact torque during process
- Protective coating

PACKAGING TECHNOLOGY

- Fast set value processing with ± 10 V
- Controlled positioning compensates dead times

CONVEYOR AND STORAGE TECHNOLOGY

- Long motor lines up to 100 m
- Robust mechanics

CRANES, LIFTING DEVICES

- High dynamics during acceleration
- Internal braking transistor

COMPRESSORS

- Output frequency up to 599 (800) Hz
- PID controllers for process control

ELEVATORS

- High starting torque
- Consistent torque with change of loads
- Suitable for modern three-phase motors and conventional elevator motors

WOOD MACHINING EQUIPMENT

- Operation of spindle drives
- Conveyor systems, stacker
- Tool adjustment

TEXTILE EQUIPMENT

- PID controllers for process control
- Protective coating

ESCALATORS

- Energy savings in stand-by mode
- High starting torque, constant speed

MEDICAL TECHNOLOGY

- Flexible fieldbus interfaces



KEB



IN ADDITION, COMBIVERT G6 CAN ALSO BE ADAPTED TO CUSTOMER-SPECIFIC APPLICATIONS

- The existing platform has been prepared for additional variations, e.g.
 - special fieldbus protocols,
 - operation of special motors
- or
 - the expansion of software functions

Sold & Serviced By:

 **ELECTROMATE**


Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com

COMBIVIS 6

- Free and easy-to-use software for startup, administration and analysis
- Integrated start-up assistants (Wizards) for quick and easy configuration
- Direct access to device documentation
- 16 channel oscilloscope for extensive analysis
- Online parameter list comparison
- Parameterization of key safety indicators and functions

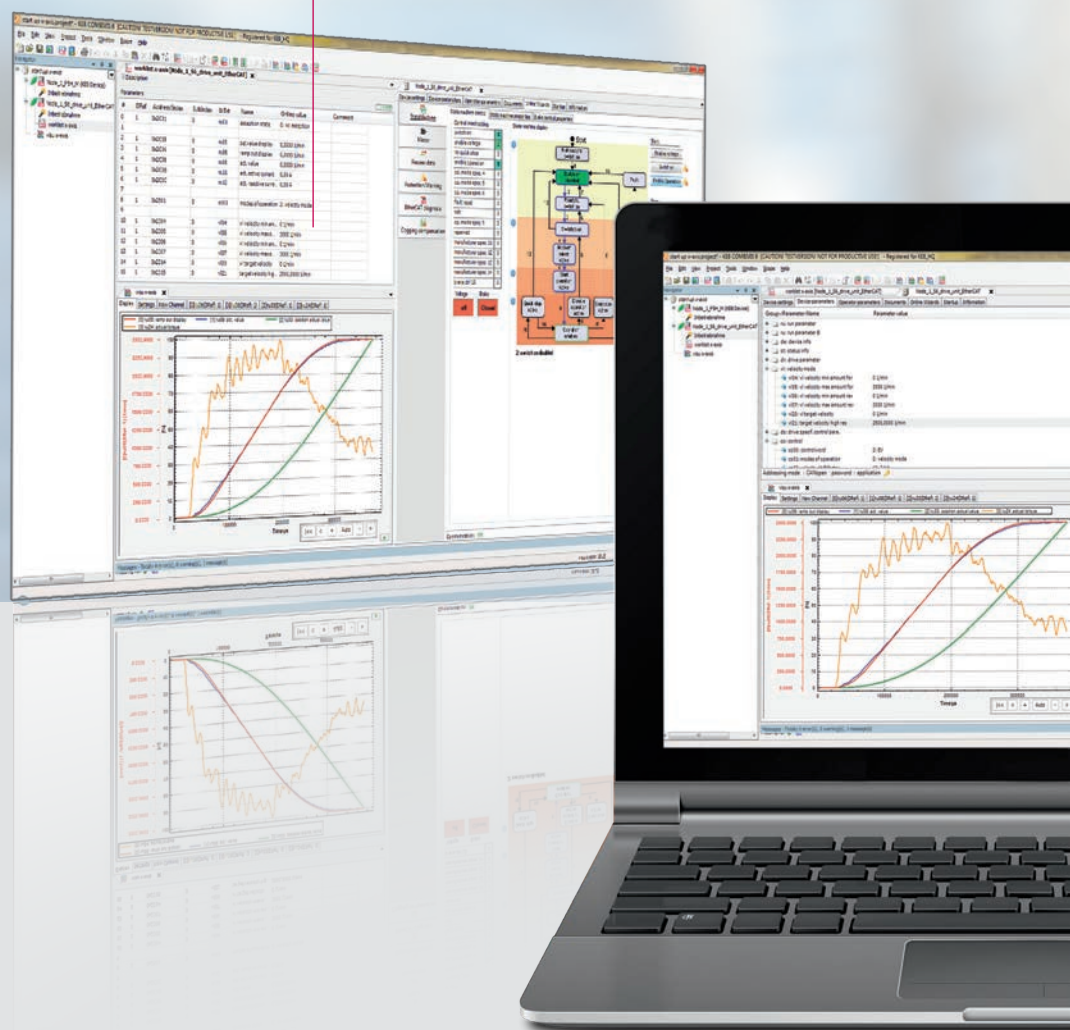

COMBIVIS studio 6 – THE ENGINEERING TOOL FOR AUTOMATION SOLUTIONS

The intelligent automation suite from KEB combines an assistant-guided component selection, fieldbus configuration, drive parameterization, IEC 61131-3 project generation and motion control. Throughout the planning and layout phase, implementation of control sequences and multi axis movement profiles, to start-up and fine tuning, the user is supported by a tool developed by experienced application engineers.


With a foundation built on libraries, devices and template databases, rapid and simple solutions can be generated for a wide range of applications.

COMMISSIONING ASSISTANT

- Complete user guidance through the commissioning process
- KEB Motor database, free for extensions
- Anti cogging
- Fieldbus diagnostic and optimization

SYSTEM CONFIGURATION AS A NEW COMPONENT OF COMBIVIS

- Access to complete KEB product database
- Intuitive gear component selection and system configuration using drag and drop
- Selection assistant with display of compatible components
- Display of all interfaces and connection components
- Material number generator
- Extensive export function for quote list, Combivis Project, Excel ...

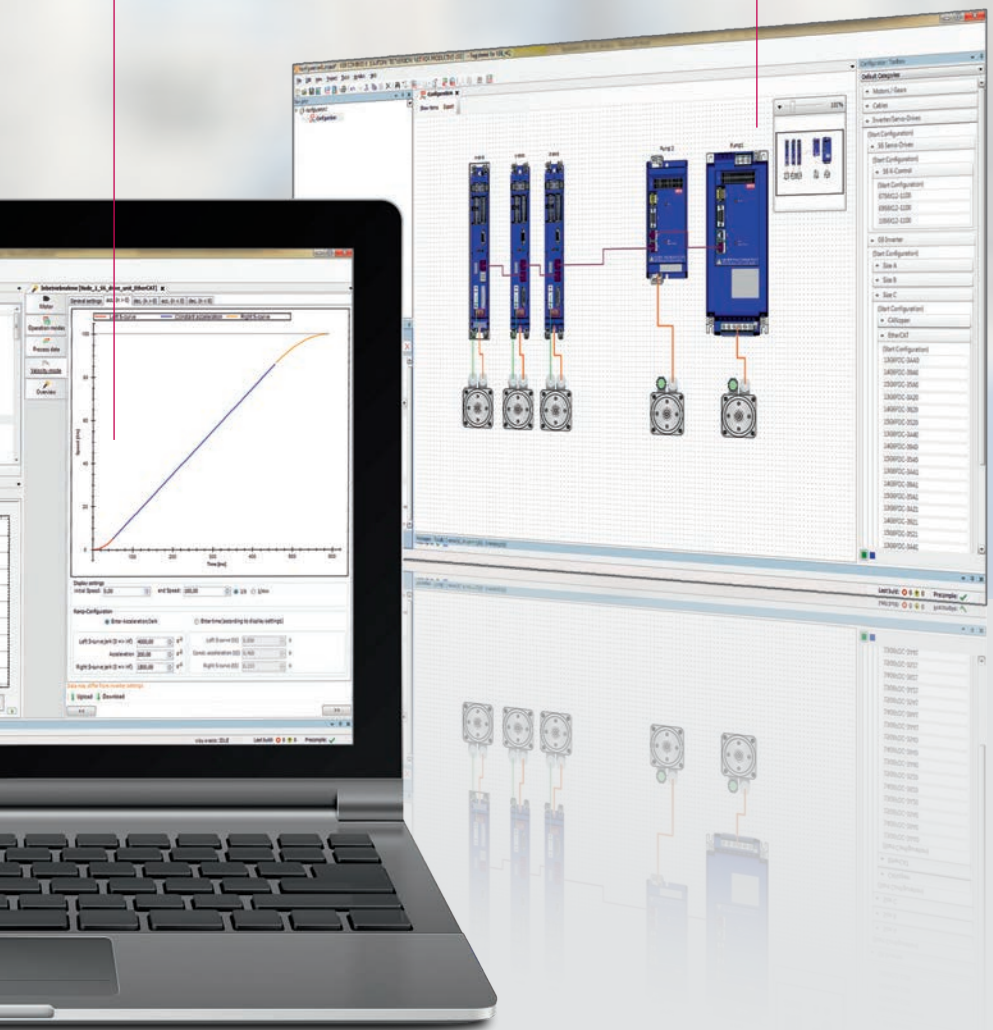


HIGHLIGHTS

- Start-up and diagnosis assistant
- Document database
- Product configuration
- Device and library database

ACCESSORIES

STABLE OPERATION IN INDUSTRIAL ENVIRONMENT

An EMC-compliant assembly with efficient control cabinet and suppression system is the basis for safe operation of machinery and equipment. The current and voltage limiting COMBILINE modules for mains and motor side are designed to meet the requirements of the COMBIVERT G6 drive controller series.

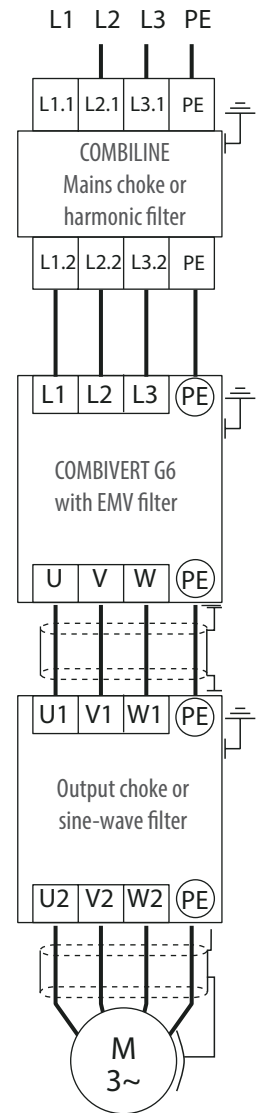

MAINS CHOKE

Reduce the input peak current draw and the mains distortion. By smoothing the input current draw, the lifetime of the drive is enhanced, in particular at constantly high utilization.

OUTPUT CHOKES AND FILTERS

reduce the voltage and current stress of the motor winding.

SINE-WAVE FILTERS

Protect the motor winding from voltage peaks and allow the use of long motor cables.

HARMONIC FILTERS

reduce the low frequency mains distortion of B6-rectifier supplied devices. These harmonic filters are the new innovative solution to comply to most international standards. The integration to a switch gear layout is as simple as of mains chokes.

HIGH PERFORMANCE FERRITE CORES

reduces the values of du/dt 's also in the frequency range of the bearing currents.

Sold & Serviced By:

 **ELECTROMATE**

Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com

KEB WORLDWIDE

Austria | KEB Automation GmbH
Ritzstraße 8 4614 Marchtrenk Austria
Tel: +43 7243 53586-0 Fax: +43 7243 53586-21
E-Mail: info@keb.at Internet: www.keb.at

Belgium | KEB Automation KG
Herenveld 2 9500 Geraardsbergen Belgium
Tel: +32 544 37860 Fax: +32 544 37898
E-Mail: vb.belgien@keb.de Internet: www.keb.de

Brazil | KEB South America – Regional Manager
Rua Dr. Omar Pacheco Souza Riberio, 70
BR-CEP 13569-430 Portal do Sol, São Carlos Brazil
Tel: +55 16 31161294 E-Mail: roberto.arias@keb.de

France | Société Française KEB SASU
Z.I. de la Croix St. Nicolas 14, rue Gustave Eiffel
94510 La Queue en Brie France
Tel: +33 149620101 Fax: +33 145767495
E-Mail: info@keb.fr Internet: www.keb.fr

Germany | Headquarters
KEB Automation KG
Suedstraße 38 32683 Barntrup Germany
Telefon +49 5263 401-0 Fax +49 5263 401-116
E-Mail: info@keb.de Internet: www.keb.de

Germany | Geared Motors
KEB Antriebstechnik GmbH
Wildbacher Straße 5 08289 Schneeberg Germany
Telefon +49 3772 67-0 Fax +49 3772 67-281
E-Mail: info@keb-drive.de Internet: www.keb-drive.de

Italy | KEB Italia S.r.l. Unipersonale
Via Newton, 2 20019 Settimo Milanese (Milano) Italia
Tel: +39 02 3353531 Fax: +39 02 33500790
E-Mail: info@keb.it Internet: www.keb.it

Japan | KEB Japan Ltd.
15 - 16, 2 - Chome, Takanawa Minato-ku
Tokyo 108 - 0074 Japan
Tel: +81 33 445-8515 Fax: +81 33 445-8215
E-Mail: info@keb.jp Internet: www.keb.jp

P. R. China | KEB Power Transmission Technology (Shanghai) Co. Ltd.
No. 435 QianPu Road Chedun Town Songjiang District
201611 Shanghai P. R. China
Tel: +86 21 37746688 Fax: +86 21 37746600
E-Mail: info@keb.cn Internet: www.keb.cn

Republic of Korea | KEB Automation KG
Room 1709, 415 Missy 2000 725 Su Seo Dong
Gangnam Gu 135- 757 Seoul Republic of Korea
Tel: +82 2 6253 6771 Fax: +82 2 6253 6770
E-Mail: vb.korea@keb.de Internet: www.keb.de

Russian Federation | KEB RUS Ltd.
Lesnaya str, house 30 Dzerzhinsky MO
140091 Moscow region Russian Federation
Tel: +7 495 6320217 Fax: +7 495 6320217
E-Mail: info@keb.ru Internet: www.keb.ru

Spain | KEB Automation KG
c / Mitjer, Nave 8 - Pol. Ind. LA MASIA
08798 Sant Cugat Sesgarrigues (Barcelona) Spain
Tel: +34 93 8970268 Fax: +34 93 8992035
E-Mail: vb.espana@keb.de Internet: www.keb.de

Switzerland | KEB Automation AG
Witzbergstraße 24 8330 Pfaeffikon/ZH Switzerland
Tel: +41 43 2886060 Fax: +41 43 2886088
E-Mail: info@keb.ch Internet: www.keb.ch

United Kingdom | KEB (UK) Ltd.
5 Morris Close Park Farm Industrial Estate
Wellingborough, Northants, NN8 6 XF United Kingdom
Tel: +44 1933 402220 Fax: +44 1933 400724
E-Mail: info@keb.co.uk Internet: www.keb.co.uk

United States | KEB America, Inc.
5100 Valley Industrial Blvd. South
Shakopee, MN 55379 United States
Tel: +1 952 2241400 Fax: +1 952 2241499
E-Mail: info@kebameric.com Internet: www.kebameric.com



KEB PARTNERS WORLDWIDE

... www.keb.de/contact/contact-worldwide

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com



Automation with Drive

www.keb.de

KEB Automation KG Suedstrasse 38 32683 Barntrup Germany Tel. +49 5263 401-0 E-Mail: info@keb.de

© KEB 000000-51G6 08.2018 Subject to technical alterations!