


MACRON PST

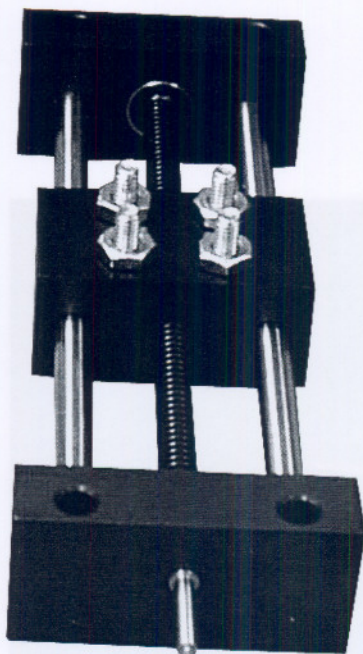

FEATURES

- Macron Screw Tables can be furnished to your specifications
- Available in any travel up to 6 inches (160 mm)
- Fast turnaround on all standard units
- Corrosion resistant surfaces
- Load Capacities – Application Specific
- Screw Type – Rolled Acme

MOTOR MOUNTING (See Page 38)

- To Customers Specifications

SPECIFICATIONS

Repeatability	+/- 0.004 in.
Linear Accuracy	+/- 0.005 in. per 36 in. Maximum
Screw Options	1/4 - 3; 1/4 - 4; 1/4 - 16; 1/4 - 20
Input Shaft	.09375 in.
Maximum Speed	10 in. / sec

SHIPPING WEIGHT

First Inch of Travel	4.4 oz.
Additional per inch	1 oz.

For Multi-Axis Units and other specifications not listed, contact your local Distributor or Macron for Engineering Design assistance and quotations

Sold & Serviced By:

 Toll Free Phone (877) SERV098
 Toll Free Fax (877) SERV099
 www.electromate.com
 sales@electromate.com

